SYMBOL	TYPICAL USAGE
	

MODEL NO.	BODY DASH NO.	PORTS C1, C2, V1 & V2	PORT T	MOUNTING HOLES
2BC	-001	.500-14 NPTF	.750-14 NPTF	INCH
2BD	-002	.750-14 NPTF	.750-14 NPTF	INCH
2BK	-003	SAE-10	SAE-12	INCH
2BL	-004	SAE-12	SAE-12	INCH
2BV	-007	.500-14 BSPP	.750-14 BSPP	METRIC
2BW	-008	.750-14 BSPP	.750-14 BSPP	METRIC

3RD ANGLE PROJECTION | REVISION | PART NO. 2B*

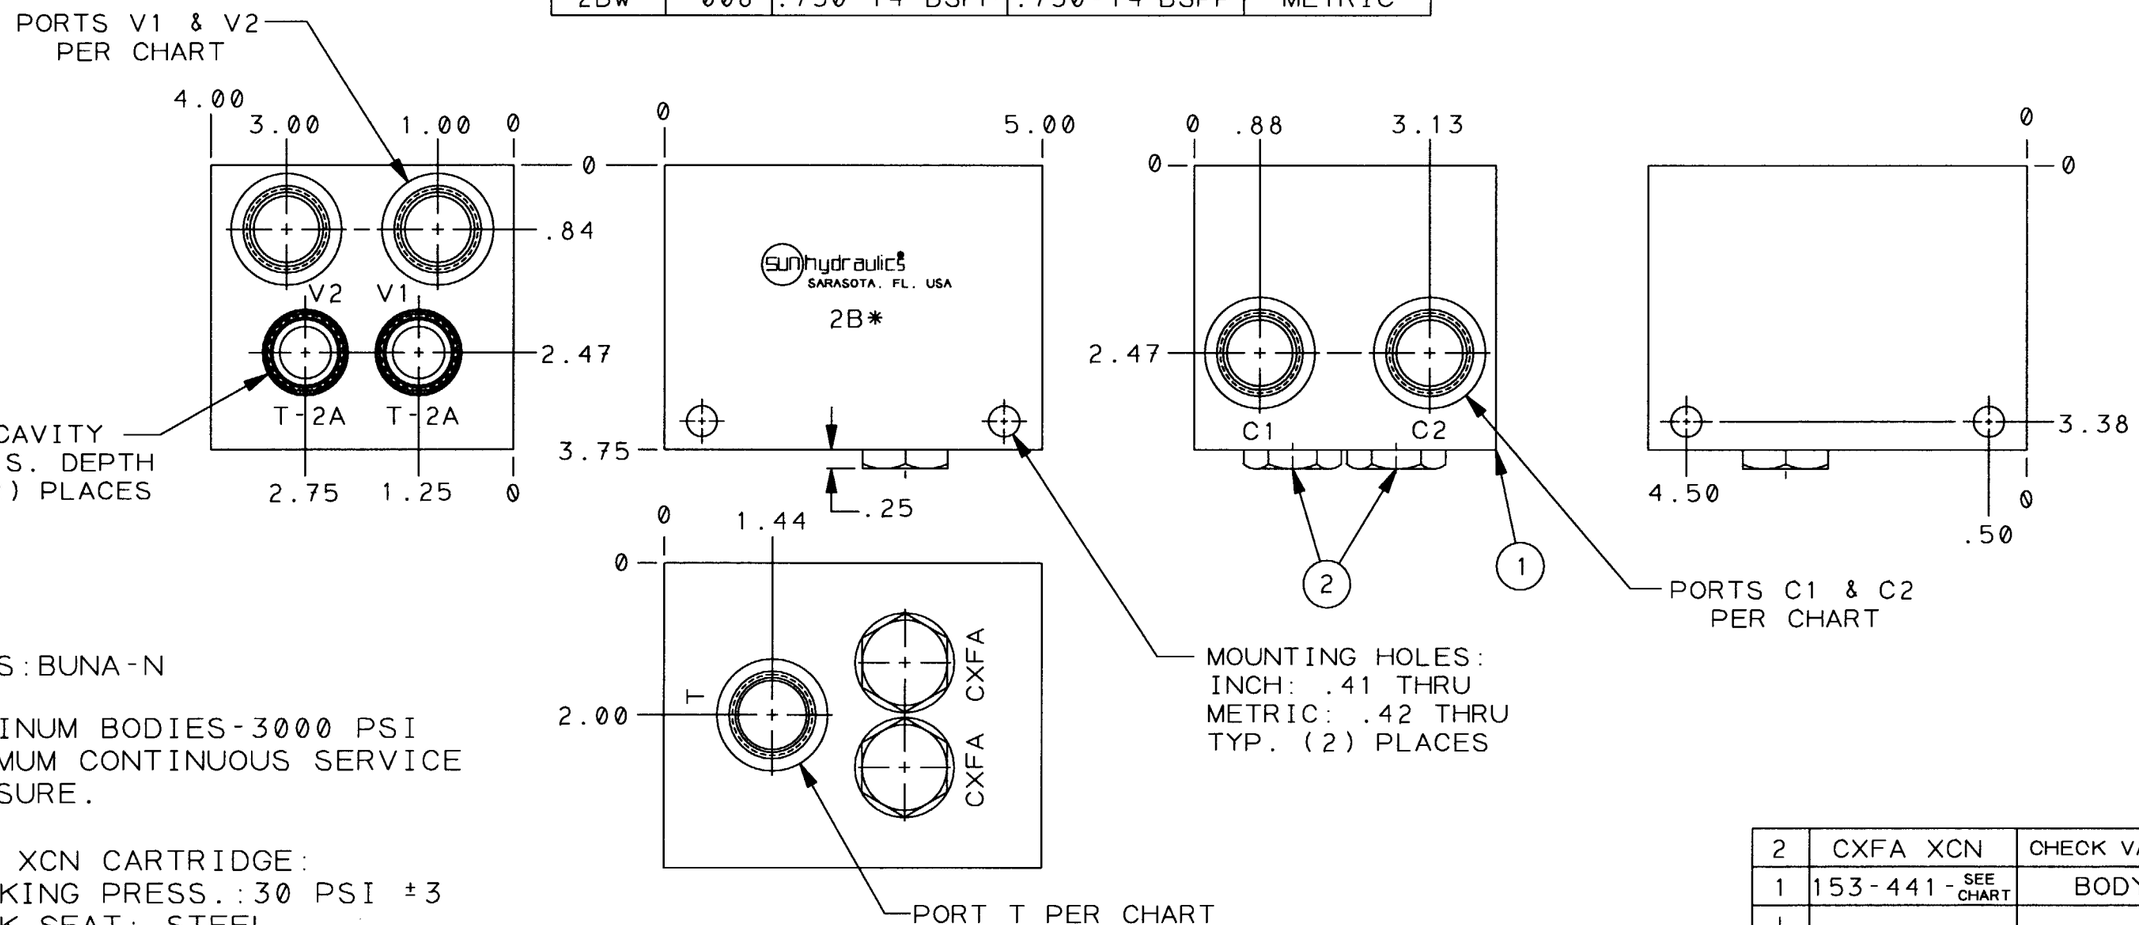

NOTES:

1) SEALS: BUNA-N

2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.

3) CXFA XCN CARTRIDGE:
CRACKING PRESS.: 30 PSI ±3
CHECK SEAT: STEEL

4) ORDERING INFO:
CBEA LAN 2B*
- 2B* → MAIN PORT DESIGNATION
- CBEA LAN → CART. TO BE INSTALLED IN T-2A CAVITIES. SEAL TYPE IN CBEA DETERMINES ITEM 2 SEAL TYPE

ITEM	PART NO.	PART NAME	QTY
2	CXFA XCN	CHECK VALVE	2
1	153-441- SEE CHART	BODY	1

OUTLINE & ASSEMBLY

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 80√
REMOVE ALL BURRS

TITLE: DUAL CUSHION/LOCK VALVE
REVISION | PART NO. 2B*
SCALE 1/2 | REF. | MATERIAL ALUMINUM & STEEL
DRAWN STW | CHECK DAS | RELEASE 5532 | HEAT TREAT & FINISH
DATE 5 APR 94 | DATE 6 APR 94 | DATE 6APR94

sun hydraulics® CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983