


SYMBOL	TYPICAL USAGE	MODEL NO.	BODY DASH NO.	PORTS C1, C2, V1 & V2	PORT S	PORT T	MOUNTING HOLES	3RD ANGLE PROJECTION	REVISION	PART NO.
		3BC	-001	.500-14 NPTF	.250-18 NPTF	.750-14 NPTF	INCH		A	3B*
		3BD	-002	.750-14 NPTF	.250-18 NPTF	.750-14 NPTF	INCH			
		3BK	-003	SAE-10	SAE-4	SAE-12	INCH			
		3BL	-004	SAE-12	SAE-4	SAE-12	INCH			
		3BV	-007	.500-14 BSPP	.250-19 BSPP	.750-14 BSPP	METRIC			
		3BW	-008	.750-14 BSPP	.250-19 BSPP	.750-14 BSPP	METRIC			

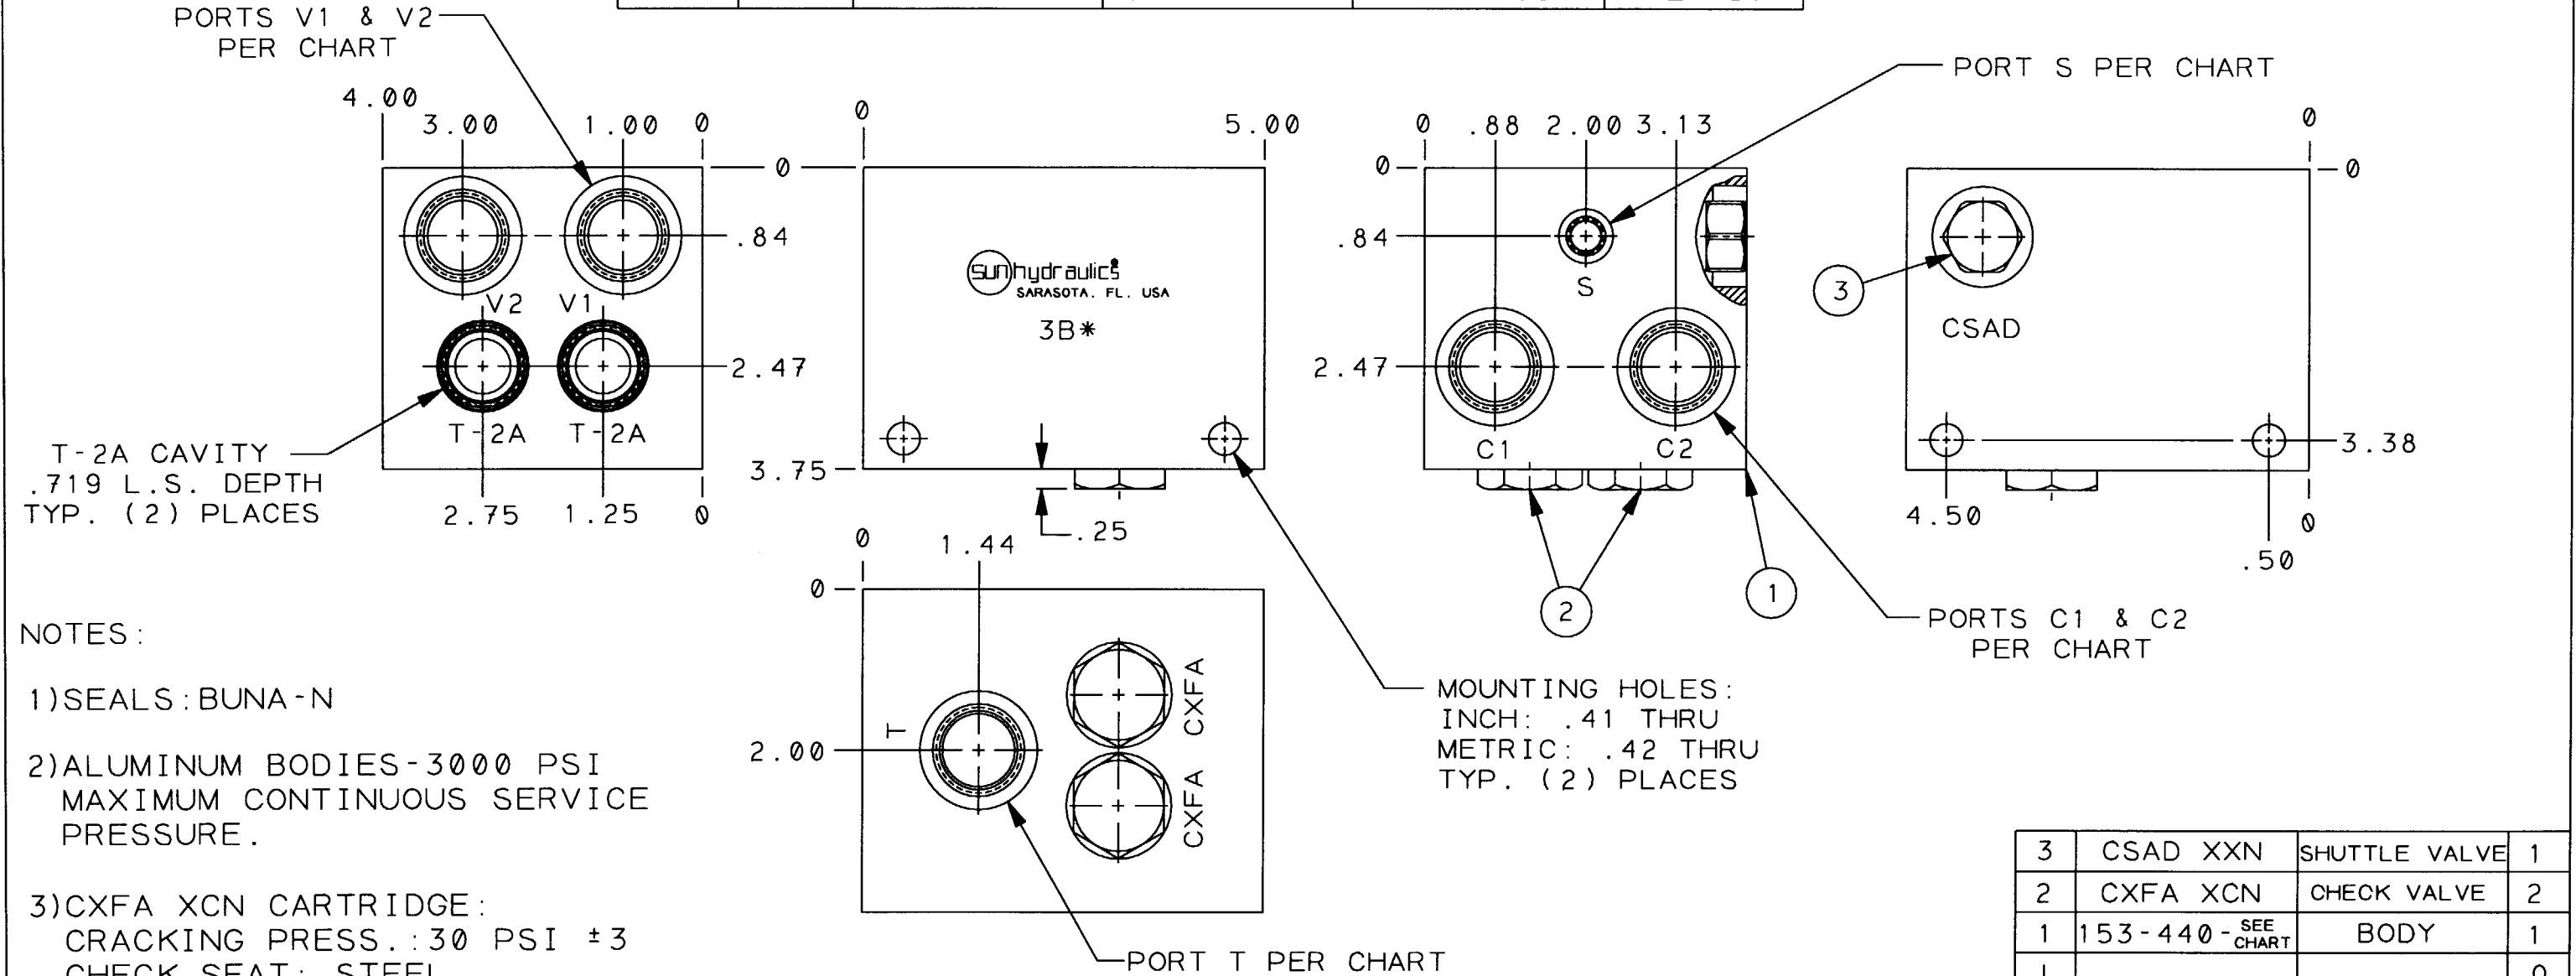

NOTES:

- 1)SEALS:BUNA-N
- 2)ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 3)CXFA XCN CARTRIDGE:
CRACKING PRESS.:30 PSI ±3
CHECK SEAT: STEEL

- 4)ORDERING INFO:
CBEA LAN 3B*
MAIN PORT DESIGNATION
CART. TO BE INSTALLED IN T-2A
CAVITIES. SEAL TYPE IN CBEA
DETERMINES ITEM 2 & 3 SEAL TYPE

3	CSAD XXN	SHUTTLE VALVE	1
2	CXFA XCN	CHECK VALVE	2
1	153-440 - SEE CHART	BODY	1
ITEM	PART NO.	PART NAME	QTY

						UNLESS OTHERWISE SPECIFIED	TITLE DUAL CUSHION/LOCK VALVE WITH SHUTTLE			REVISION A	PART NO. 3B*
						DIMENSION TOL	SCALE 1/2	REF.	MATERIAL ALUMINUM & STEEL		
						.x ±.030	DRAWN STW	CHECK DAS	RELEASE 5532		
						.xx ±.015	DATE 30 MAR 94	DATE 6 APR 94	DATE 6 APR 94		
						.xxx ±.005					
						ANGLE TOL ± 1/2					
						FINISH 80V					
A	CSAD WAS CSAB.	31MAY94	STW		522	REMOVE ALL BURRS					
LET	REVISION	DATE	DRN	CHK	REL						