


CHART A (PORT OPTIONS)				
MODEL NUMBER	PORT G	PORTS 1 & 2	PORT 3	BODY DASH NO ITEM 1
B6A	.250-18 NPTF	.250-18 NPTF	.250-18 NPTF	-001
B6B	.250-18 NPTF	.375-18 NPTF	.250-18 NPTF	-002
B6C	.250-18 NPTF	.500-14 NPTF	.250-18 NPTF	-003
B6D	.250-18 NPTF	.750-14 NPTF	.250-18 NPTF	-004
B6I	.250-18 NPTF	SAE-6	SAE-6	-005
B6J	.250-18 NPTF	SAE-8	SAE-6	-006
B6K	.250-18 NPTF	SAE-10	SAE-6	-007
B6U	.250-19 BSPP	.375-19 BSPP	.250-19 BSPP	-008
B6V	.250-19 BSPP	.500-14 BSPP	.250-19 BSPP	-009
B6W	.250-19 BSPP	.750-14 BSPP	.250-19 BSPP	-010

NOTES :

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
3. CXFA XCN CARTRIDGE: CRACKING PRESSURE:30 PSI ±3 CHECK SEAT:STEEL
4. ORDERING INFO: RSFC LAN B6*

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-2A CAVITIES. SEAL TYPE IN RSFC DETERMINES ITEM 2 SEAL TYPE

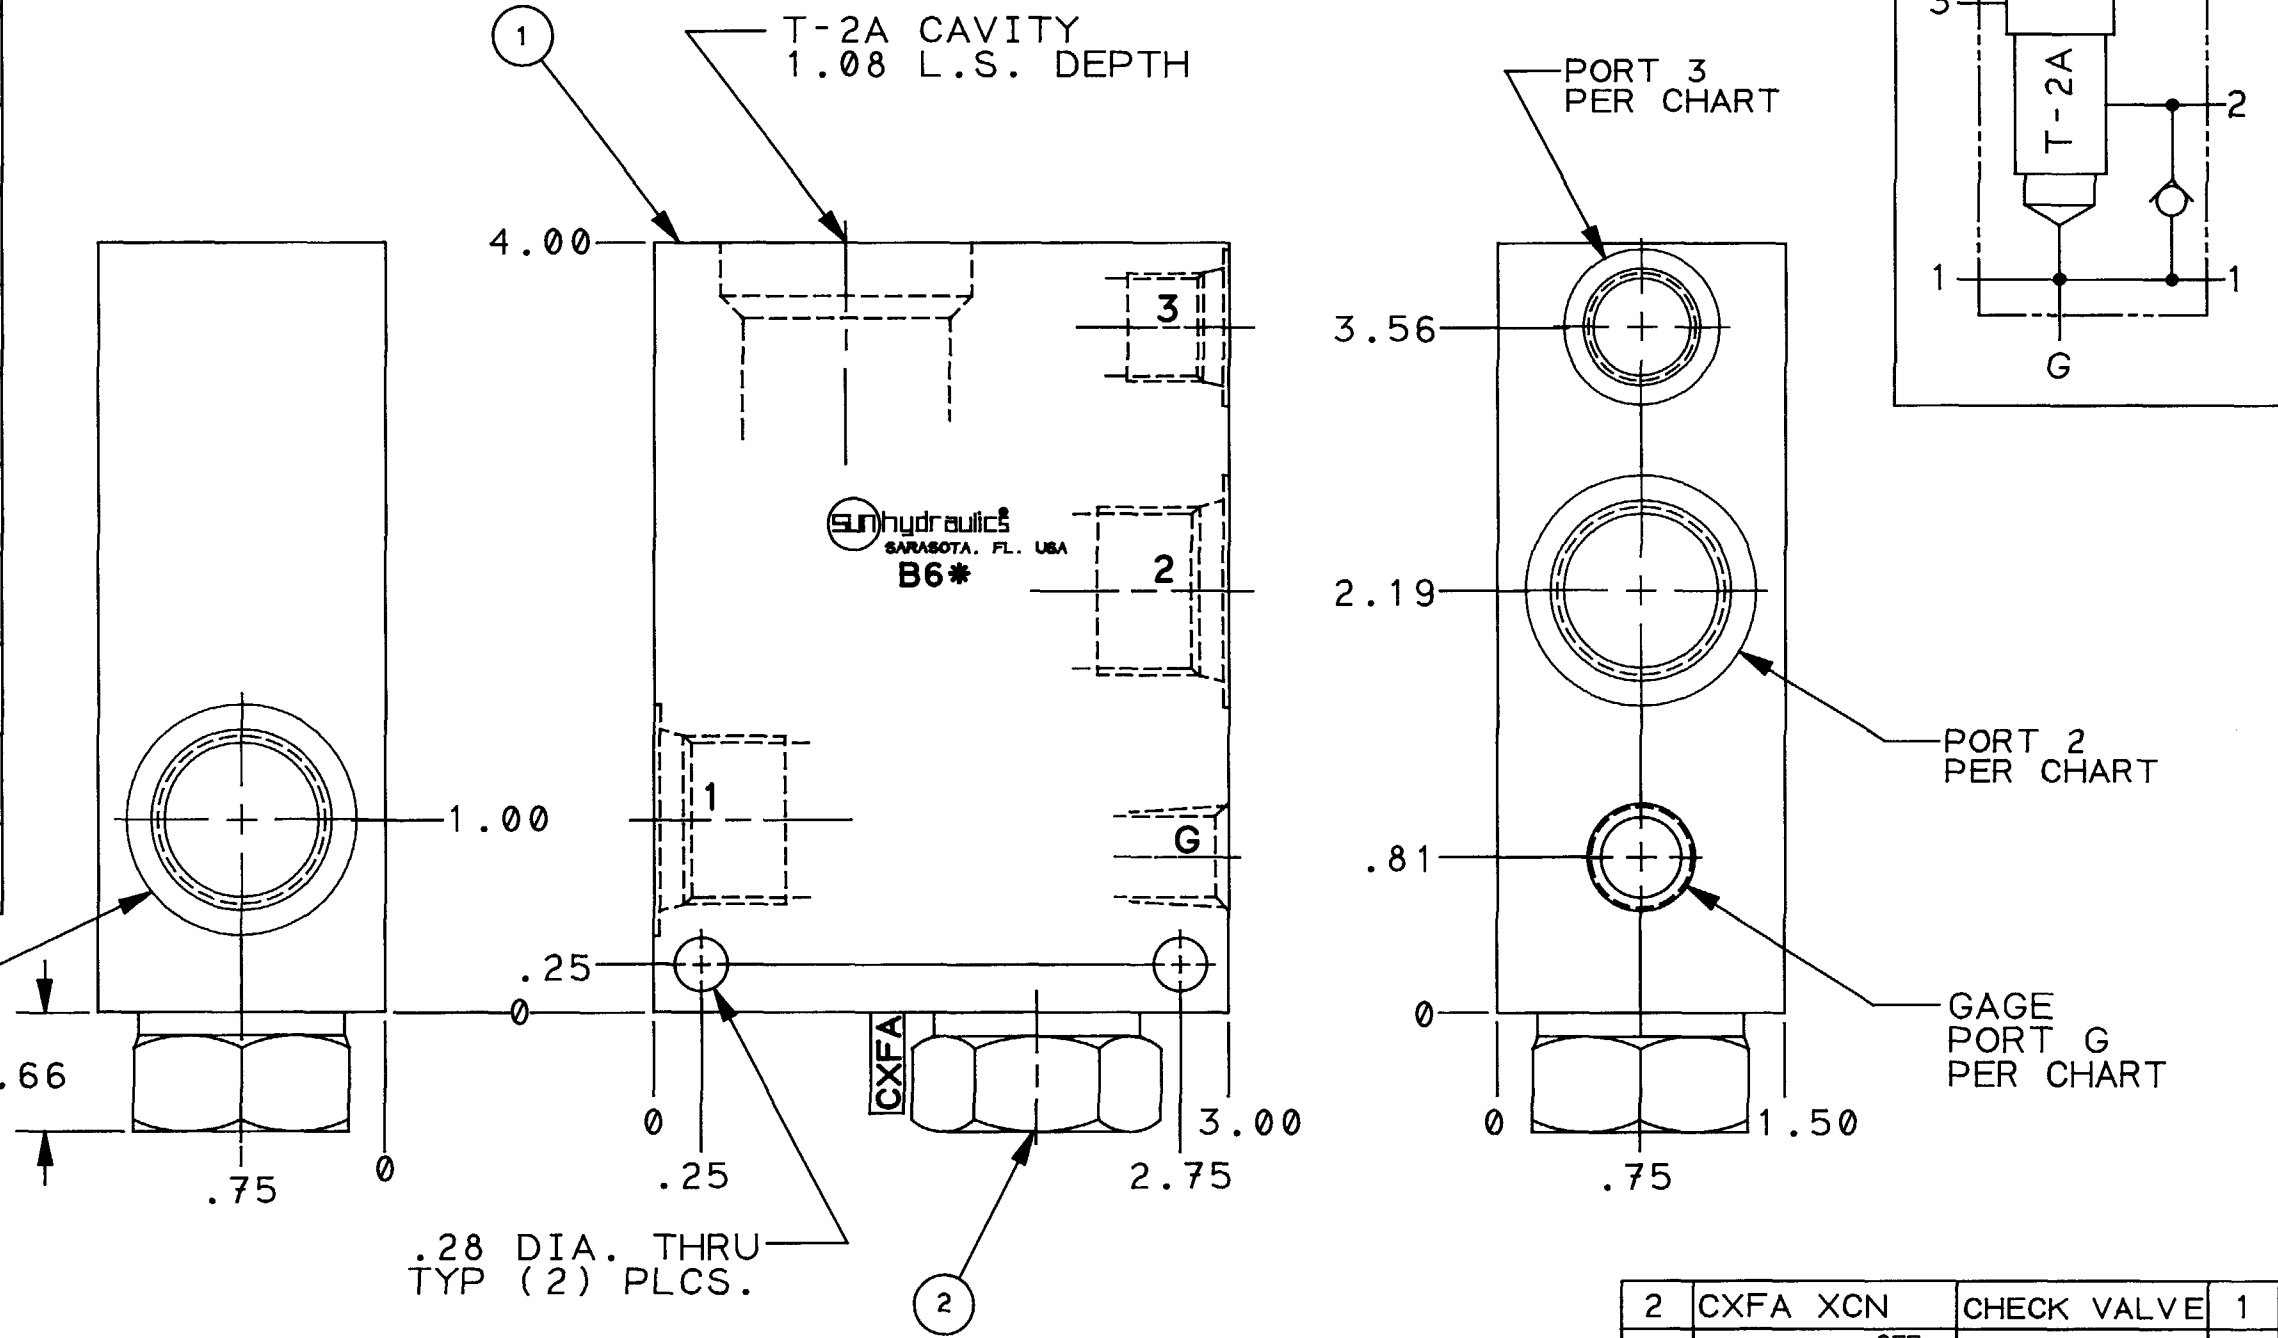

REVISION	PART NO.	B6*
SYMBOL		

1. SEALS: BUNA-N 2. ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE. 3. CXFA XCN CARTRIDGE: CRACKING PRESSURE:30 PSI ±3 CHECK SEAT:STEEL 4. ORDERING INFO: RSFC LAN B6*					2 CXFA XCN CHECK VALVE 1 1 150-861-SEE TABLE BODY 1				
MAIN PORT DESIGNATION CART. TO BE INSTALLED IN T-2A CAVITIES. SEAL TYPE IN RSFC DETERMINES ITEM 2 SEAL TYPE					PART NO. PART NAME QTY				
TITLE T-2A CAVITY W/REVERSE FF CHECK SCALE REF. 1/1 YSEL MATERIAL ALUM & STEEL HEAT TREAT & FINISH					REVISION PART NO. B6*				
DIMENSION TOL .x =±.030 .xx =±.015 .xxx=±.005 ANGLE TOL±½ FINISH 80V REMOVE ALL BURRS					DRAWN BR5 CHECK R/B RELEASE 2848 DATE 10-15-90 DATE 11-12-90 DATE 12-26-90				
LET REVISION DATE DRN CHK REL					SUN hydraulics CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, US TELEPHONE (813) 355-2983				