

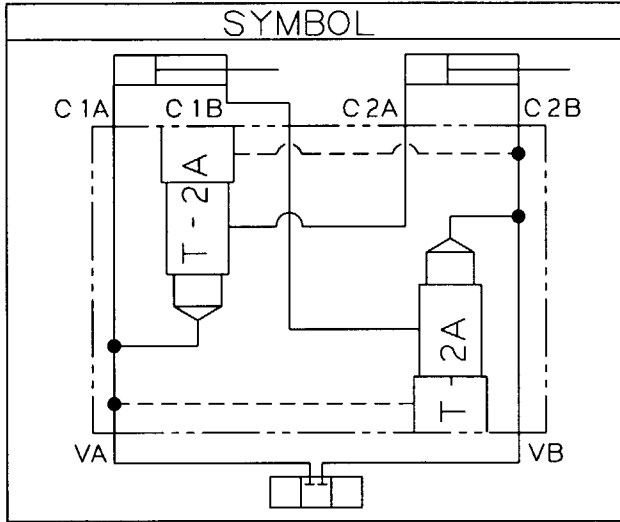
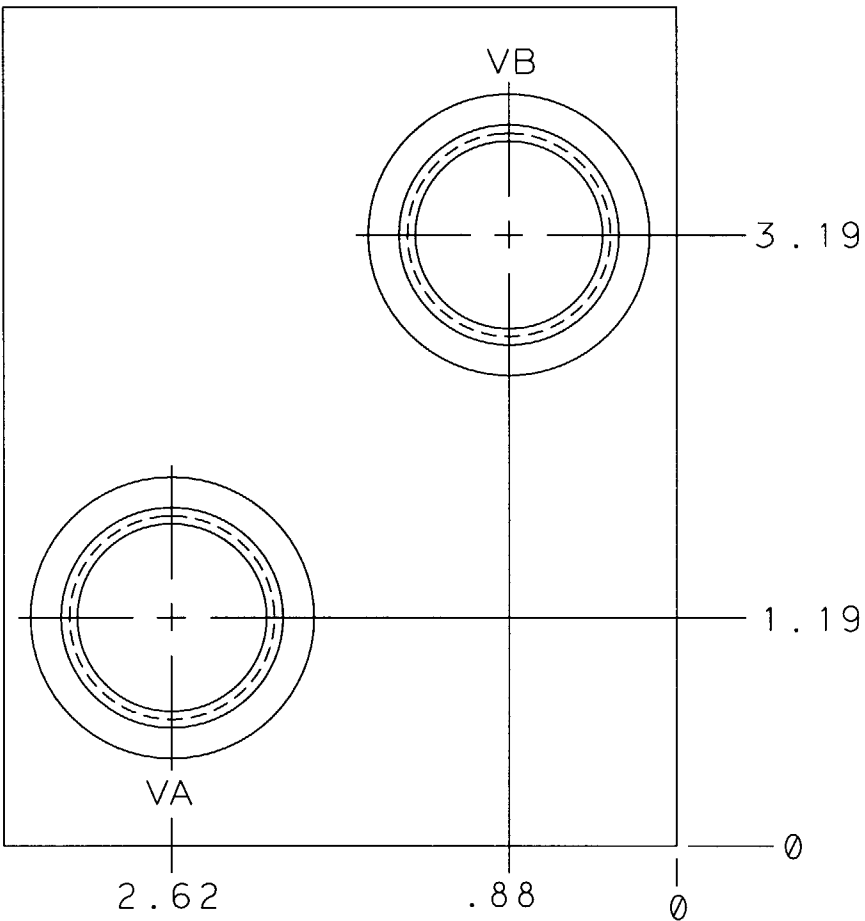


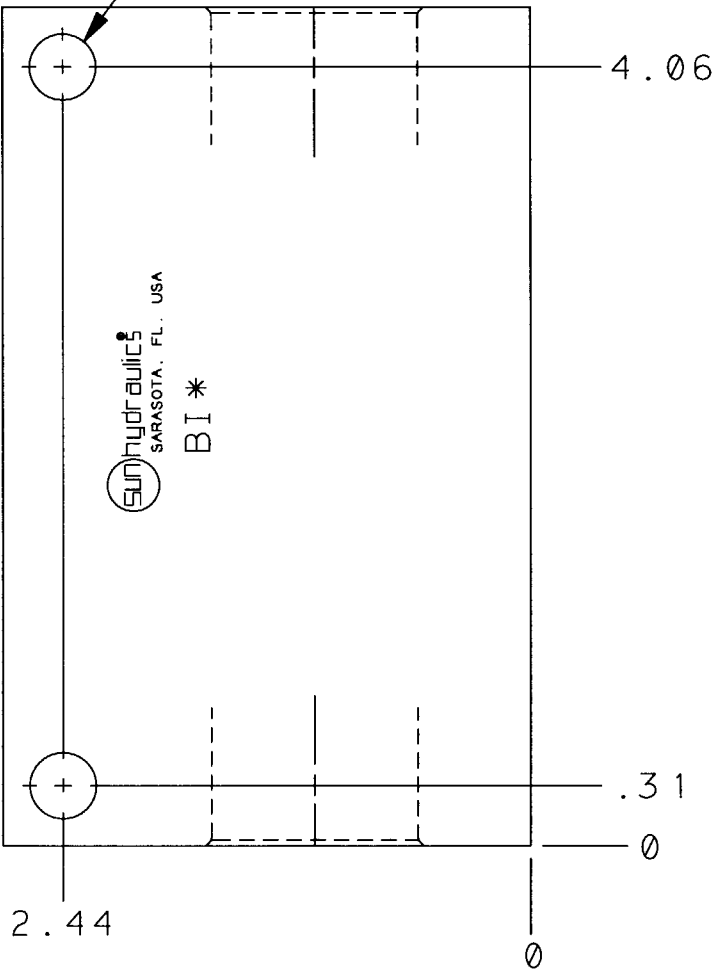


NOTE:
1) ALUMINUM BODIES: 3000 PSI
MAX. CONTINUOUS SERVICE PRESSURE.

T-2A CAVITY
.719 L.S. DEPTH
TYP (2) PLACES

.34 DIA THRU
MTG HOLE
TYP (2) PLACES

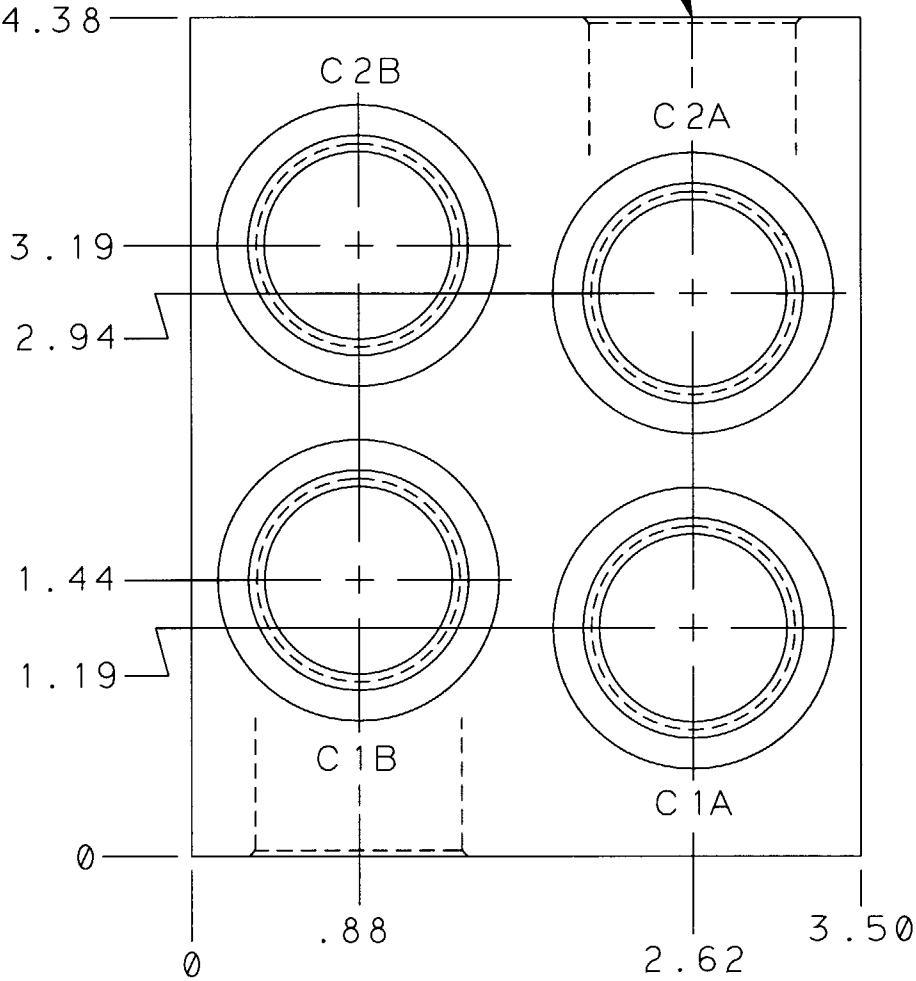

3RD ANGLE
PROJECTION




REVISION

PART NO.

BI *

PART NO.	BODY DASH NO.	PORT SIZE - ALL PORTS
BIB	-001	.375-18 NPTF
BIC	-002	.500-14 NPTF
BID	-003	.750-14 NPTF
BIJ	-004	SUN STD SAE-8
BIK	-005	SUN STD SAE-10
BIL	-006	SUN STD SAE-12
BIU	-007	.375-19 BSPP
BIV	-008	.500-14 BSPP
BIW	-009	.750-14 BSPP

1	153-767-***	BODY	1
ITEM	PART NO.	PART NAME	QTY

						UNLESS OTHERWISE SPECIFIED	TITLE BODY-DUAL SERIES 2 DIRECT ACTING SEQUENCE VALVES			REVISION	PART NO. BI *
						DIMENSION TOL	SCALE	REF.	MATERIAL	 sun hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983	
						.x = ±.030	1:1		ALUMINUM		
						.xx = ±.015					
						.xxx = ±.005	DRAWN	CHECK	RELEASE		HEAT TREAT & FINISH
						ANGLE TOL ± 1/2	DAS	STW	6548		
						FINISH 80✓	DATE	DATE	DATE		
LET	REVISION					DATE	DRN	CHK	REL		
						REMOVE ALL BURRS	10MAY95	10MAY95	10MAY95		