SYMBOL

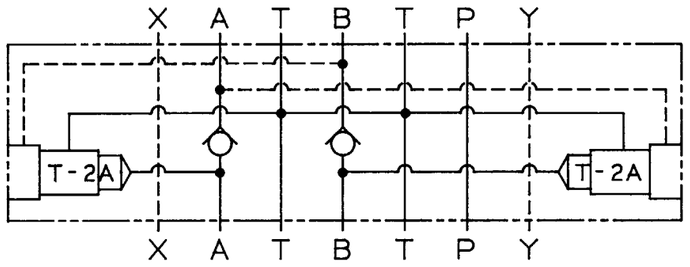

REVISION	PART NO.
	BJ8

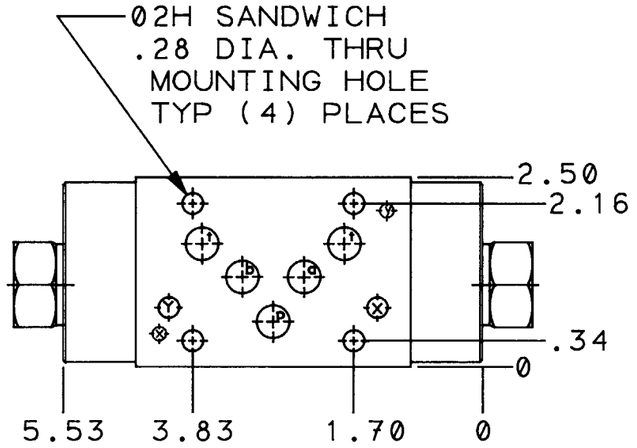

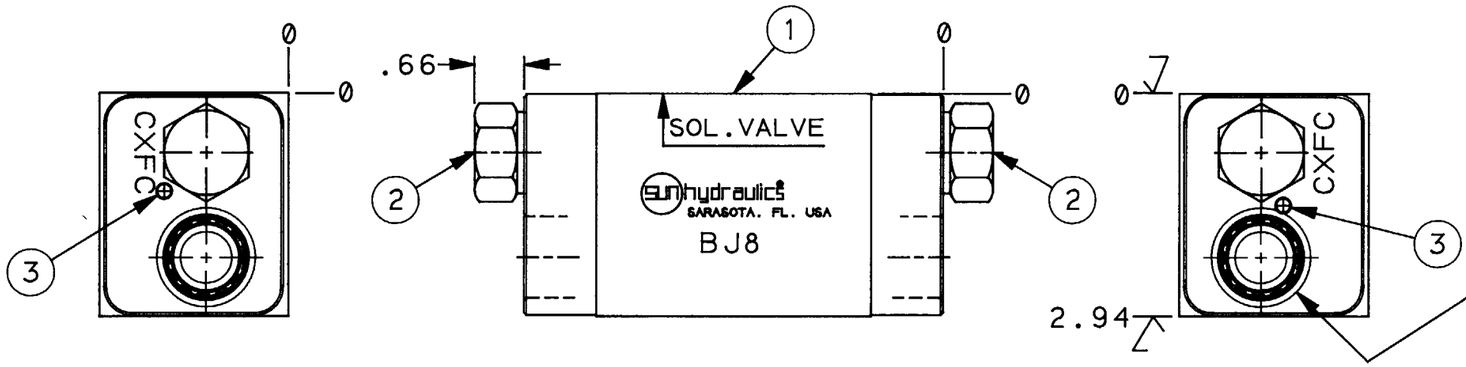

NOTES:

1) SEALS: BUNA-N
2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
3) CXFC XCN CARTRIDGE: CRACKING PRESSURE: 30 PSI ± 3 CHECK SEAT: STEEL
4) ORDERING INFO: CBEA LAN BJ8

CART. TO BE INSTALLED IN T-2A CAV. SEAL TYPE IN CBEA DETERMINES ITEM 2 SEAL TYPE

ITEM	PART NO.	PART NAME	QTY
3	850-004-218	PLUG	2
2	CXFC XCN	CHECK VALVE	2
1	151-652	BODY	1

OUTLINE & ASSEMBLY

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ± ½
FINISH 80 √
REMOVE ALL BURRS

TITLE: 02H SANDWICH-CUSHION LOCK VALVE

SCALE	REF.	MATERIAL
1:2	YCEV LAN	ALUMINUM

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
BRS	JLB	3179	
DATE 7-11-91	DATE 7-11-91	DATE 7-12-91	

REVISION	PART NO.
	BJ8

sun hydraulics® CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983