
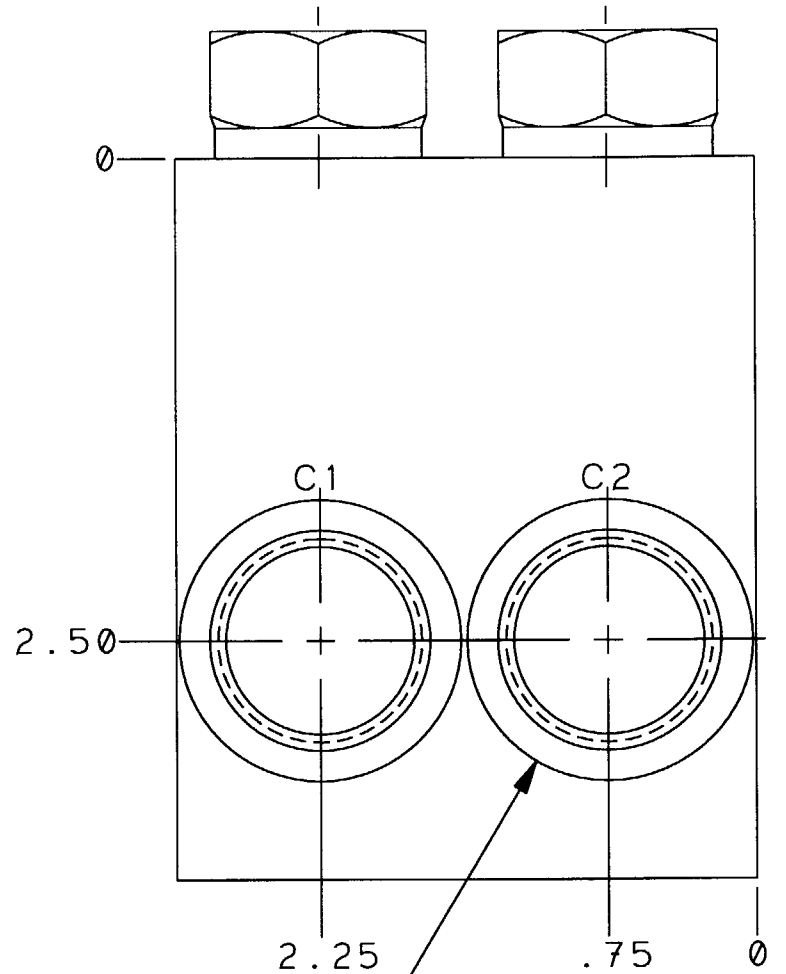
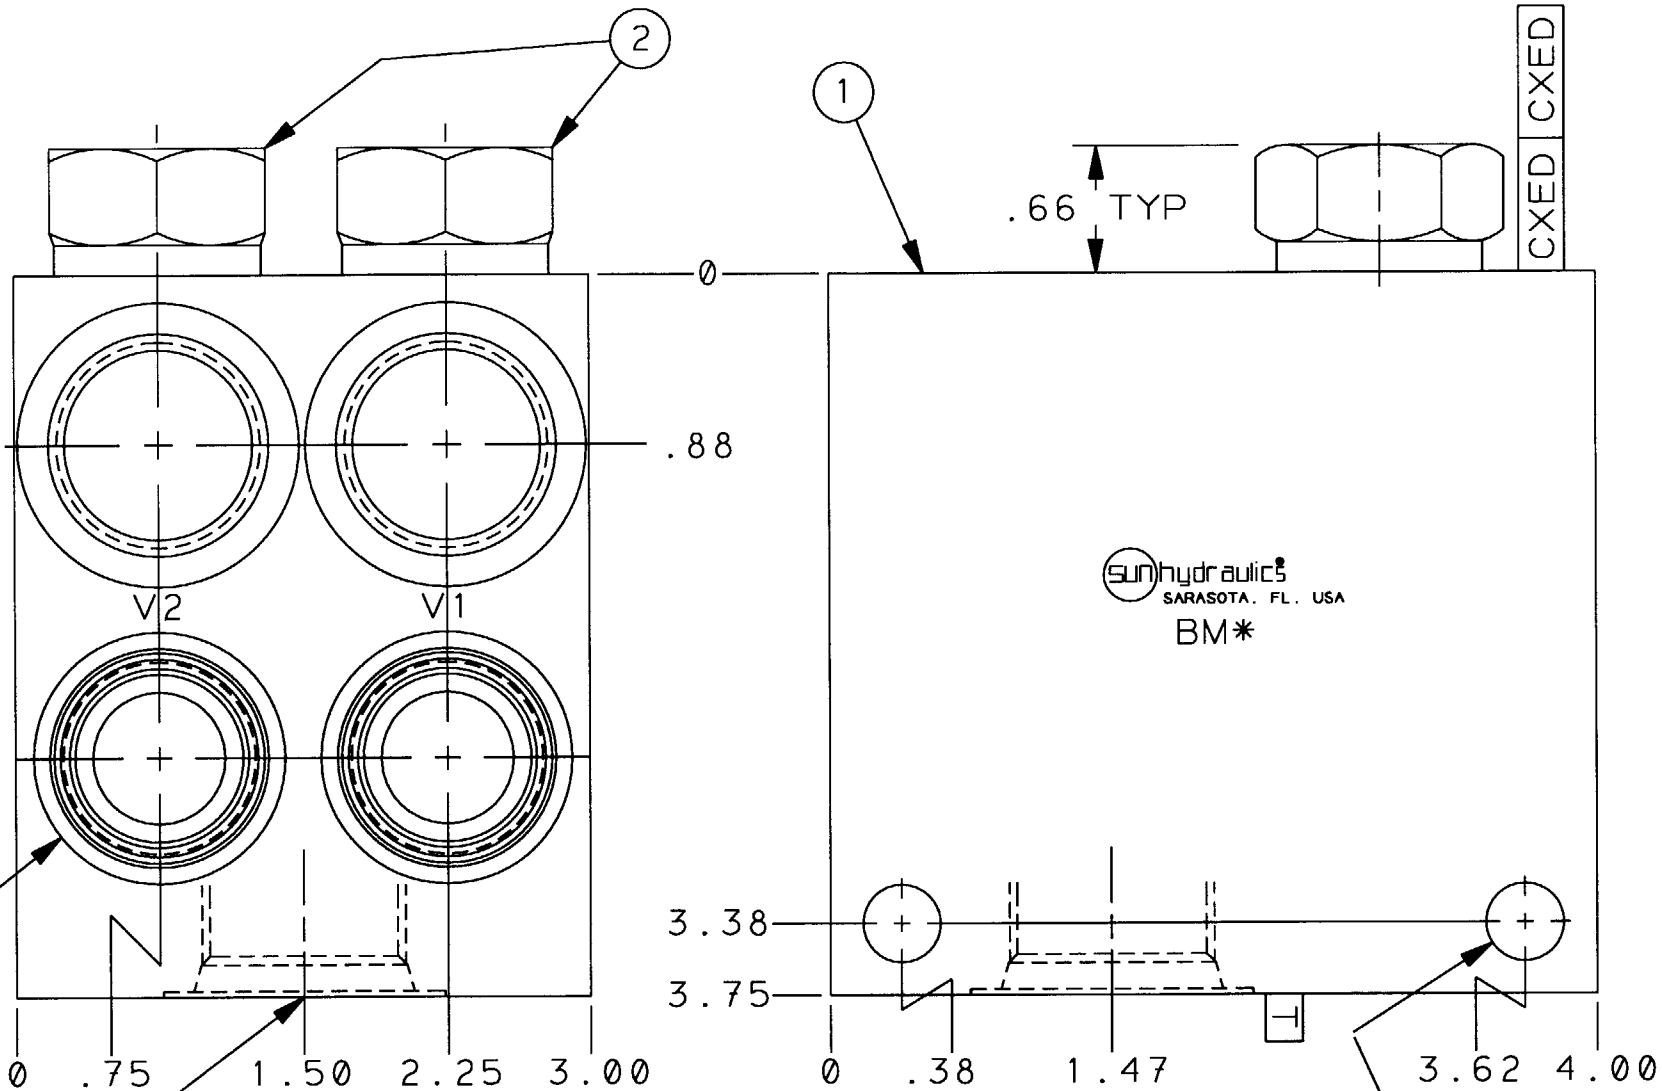


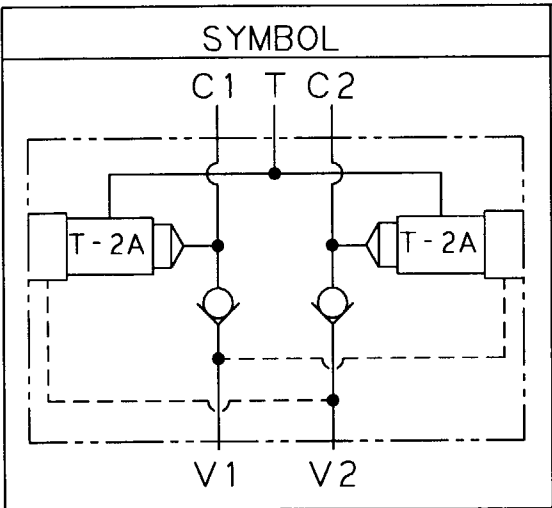

T-2A CAVITY
.78 L.S. DEPTH
TYP (2) PLACES

PORT T PER
CHART

- NOTES:
1. SEALS: BUNA-N
 2. ALUMINUM BODIES-3000
PSI MAXIMUM CONTINUOUS
SERVICE PRESSURE.
 3. CXED XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI $\pm$ 3
CHECK SEAT: STEEL.
 4. ORDERING INFO:
CBEA LAN BM*

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-2A
CAVITIES. SEAL TYPE IN CBEA
DETERMINES ITEM 2 SEAL TYPE

.41 DIA. THRU
TYP (2) PLCS.
MTG. HOLES
FOR .375 BOLTS

PORTS C1, C2, V1
& V2 PER CHART

PORT OPTIONS

MODEL NO.	PORTS C1, C2, V1 & V2	PORT T	BODY DASH NO. (ITEM 1)
BMC	.500-14 NPTF	.750-14 NPTF	-001
BMD	.750-14 NPTF	.750-14 NPTF	-002
BMK	SAE-10	SAE-12	-003
BML	SAE-12	SAE-12	-004
BMV	.500-14 BSPP	.750-14 BSPP	-007
BMW	.750-14 BSPP	.750-14 BSPP	-008

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x $\pm$.030
.xx $\pm$.015
.xxx $\pm$.005
ANGLE TOL $\pm$ 1/2
FINISH 80
REMOVE ALL BURRS
A PORT "T" WAS .500-14 NPTF ON -001
18 OCT93 BRS
5076
LET REVISION
DATE DRN CHK REL

OUTLINE & ASSEMBLY

TITLE	SCALE	REF.	MATERIAL
DUAL CUSHION/LOCK VALVE	1/1	YCED LAN	ALUM. & STEEL
DRAWN BRS	CHECK R/B	RELEASE 2848	HEAT TREAT & FINISH
DATE 10-17-90	DATE 11-12-90	DATE 11-21-90	

REVISION	PART NO.
A	BM*
1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, US TELEPHONE (813) 355-2983	

ITEM	PART NO.	PART NAME	QTY
2	CXED XCN	CHECK VALVE	2
1	150-052-SEE TABLE	BODY	1