

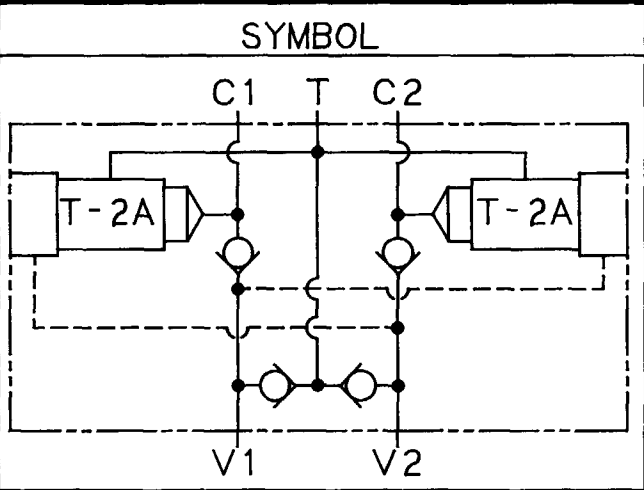


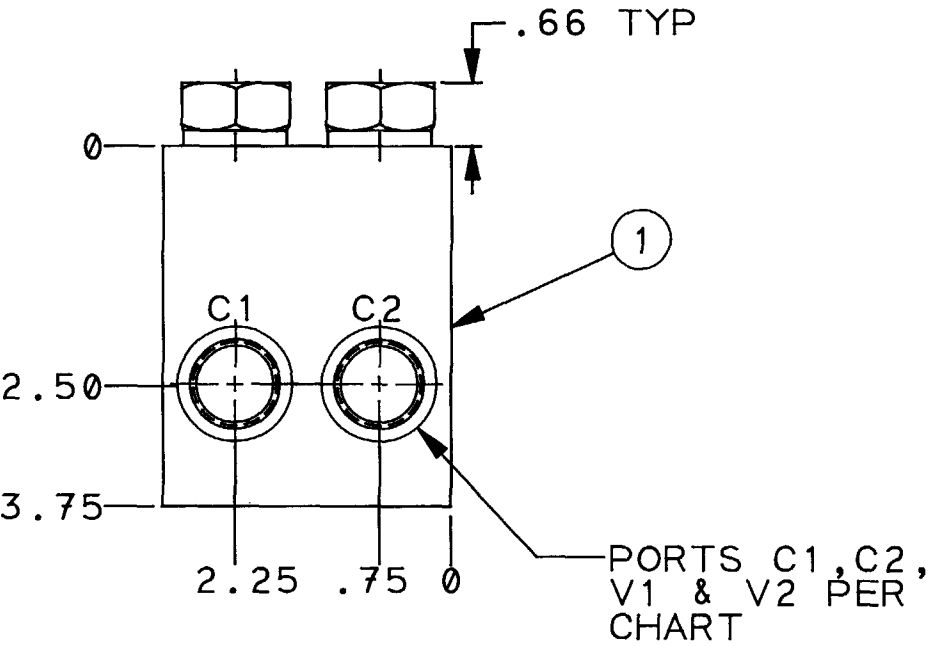

BP*

T-2A CAVITY
.78 L.S. DEPTH
TYP (2) PLCS.

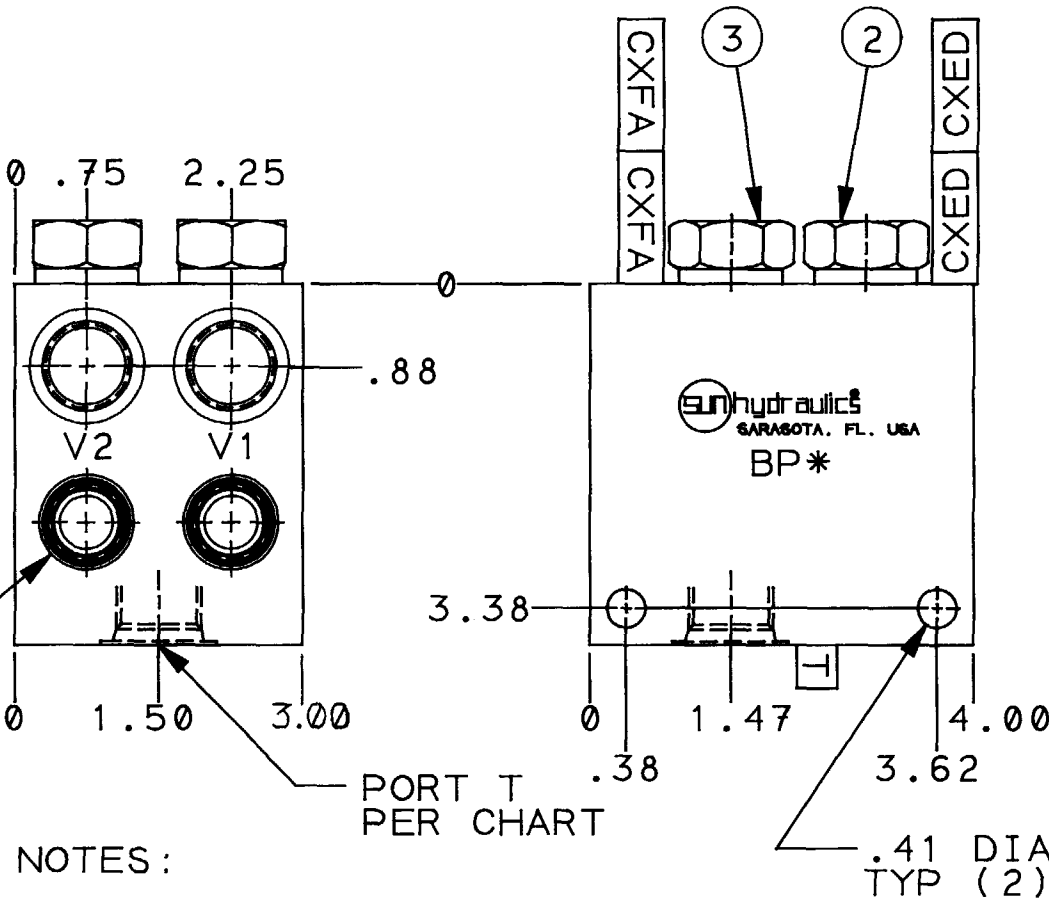

NOTES:

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000 PSI
MAX CONTINUOUS SERVICE
PRESS.
3. CXDA XAN CARTRIDGE:
CRACKING PRESSURE: 4 PSI $\pm$ 1
CHECK SEAT: STEEL.
4. CXCD XAN CARTRIDGE:
CRACKING PRESSURE: 4 PSI $\pm$ 1
CHECK SEAT: STEEL.
5. ORDERING INFO:
CBEA LAN BP*

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-2A
CAV. SEAL TYPE IN CBEA DETERMINES
ITEMS 2 & 3 SEAL TYPE

PORT OPTIONS			
MODEL NO.	PORTS C1, C2, V1 & V2	PORT T	BODY DASH NO. (ITEM 1)
BPC	.500-14 NPTF	.750-14 NPTF	-001
BPD	.750-14 NPTF	.750-14 NPTF	-002
BPK	SAE-10	SAE-12	-003
BPL	SAE-12	SAE-12	-004
BPV	.500-14 BSPP	.750-14 BSPP	-007
BPW	.750-14 BSPP	.750-14 BSPP	-008

OUTLINE & ASSEMBLY				REVISION		PART NO.	
TITLE DUAL CUSHION/LOCK VALVE						BP*	
SCALE REF. 1/2 YCEE LAN							
DRAWN BR5							
CHECK R/B							
RELEASE 2848							
DATE 10-19-90							
DATE 11-12-90							
DATE 12-26-90							
MATERIAL ALUM & STEEL							
HEAT TREAT & FINISH							
UNLESS OTHERWISE SPECIFIED							
DIMENSION TOL							
.X $\pm$.030							
.XX $\pm$.015							
.XXX $\pm$.005							
ANGLE TOL $\pm$ 1/2							
FINISH 80							
REMOVE ALL BURRS							
LET	REVISION	DATE	DRN	CHK	REL		

