


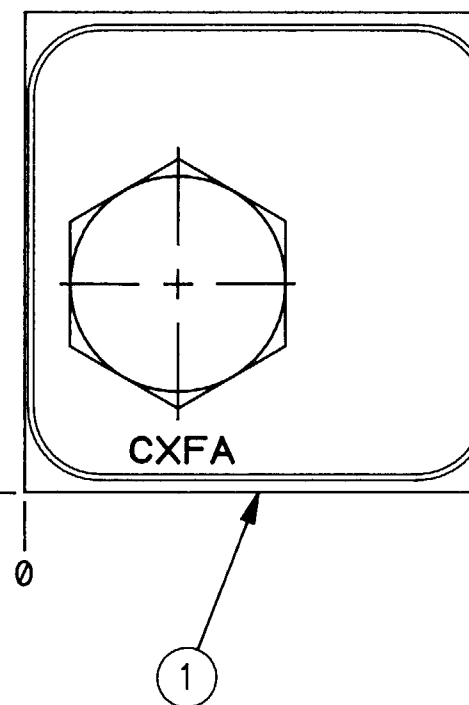

NOTES :

- 1)SEALS:BUNA-N
- 2)ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 3)CXFA XAN CARTRIDGE:
CRACKING PRESSURE:4 PSI ±1
CHECK SEAT:STEEL
- 4)ORDERING INFO:
RDFA LAN CB5

L CART. TO BE INSTALLED IN
T-3A CAV. SEAL TYPE IN RDFA
DETERMINES ITEM 2 SEAL TYPE

REVISION	PART NO.	CB5
----------	----------	-----

4	500-001-014	"O" RING	5
3	700-001	SEAL PLATE	1
2	CXFA XAN	CHECK VALVE	1
1	151-505	BODY	1
ITEM	PART NO.	PART NAME	QTY

						UNLESS OTHERWISE SPECIFIED	TITLE ISO 05 SANDWICH- OUT OF B W/REVERSE FREE FLOW CHECK			REVISION	PART NO. CB5
						DIMENSION TOL	SCALE	REF.	MATERIAL	 SUN hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983	
						.x = ±.030	1:1	YCFM LAN	ALUMINUM		
						.xx = ±.015	DRAWN	CHECK	RELEASE		HEAT TREAT & FINISH
						.xxx = ±.005	BR5	JLB	3166		
						ANGLE TOL ±%	DATE	DATE	DATE		
LET	REVISION	DATE	DRN	CHK	REL	FINISH 80✓ REMOVE ALL BURRS	7-2-91	7-5-91	7-8-91		