


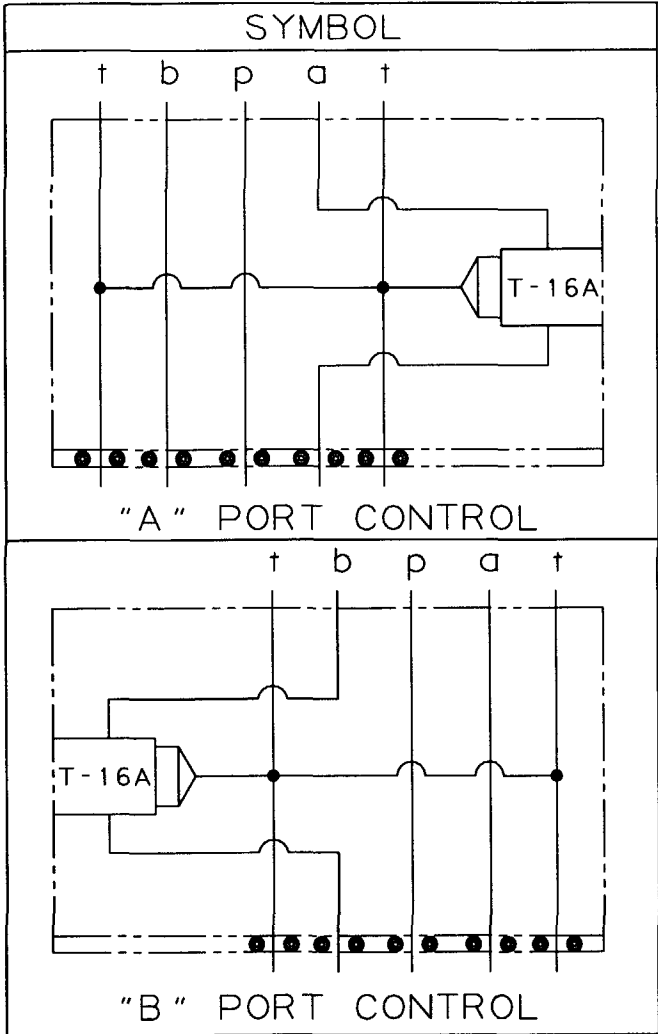


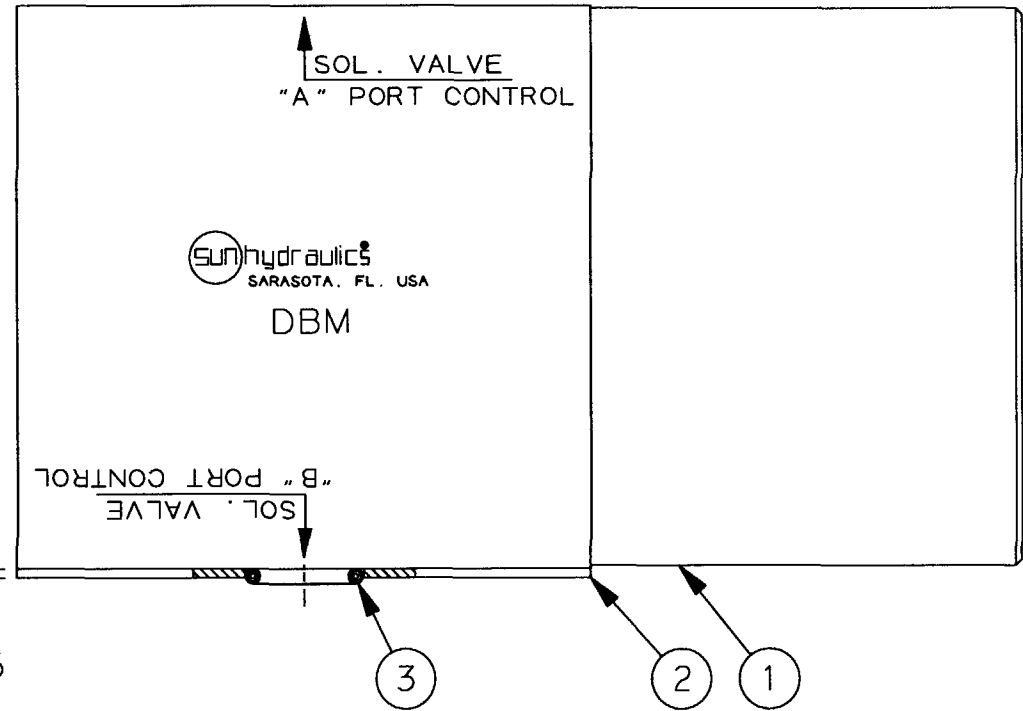

ISO 05 PATTERN
.28 DIA THRU-TYP (4) PLACES

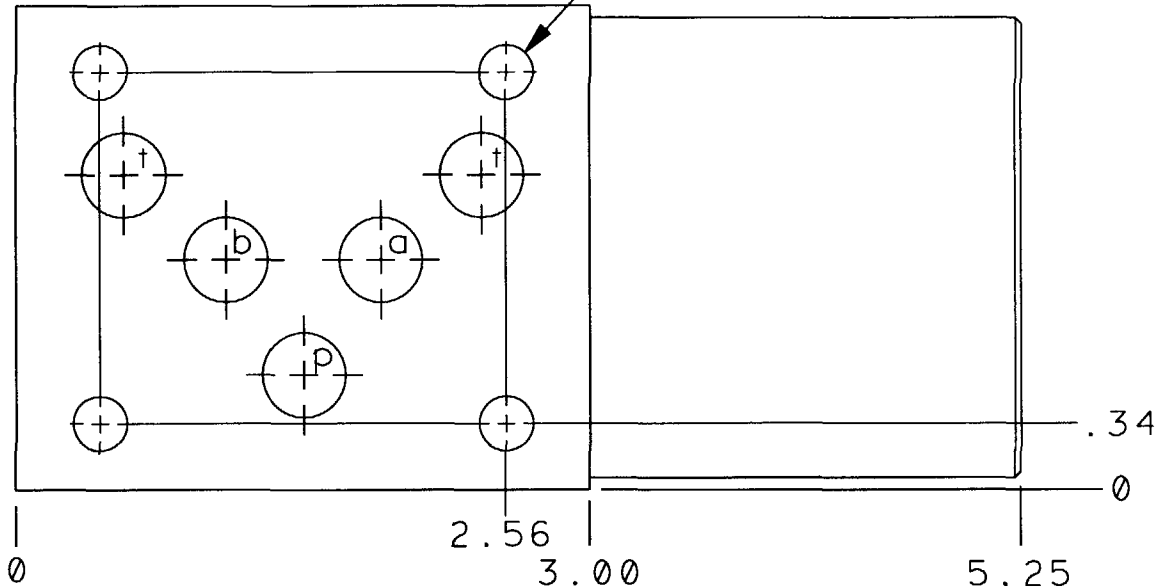

T-16A CAVITY
.031 L.S.DEPTH

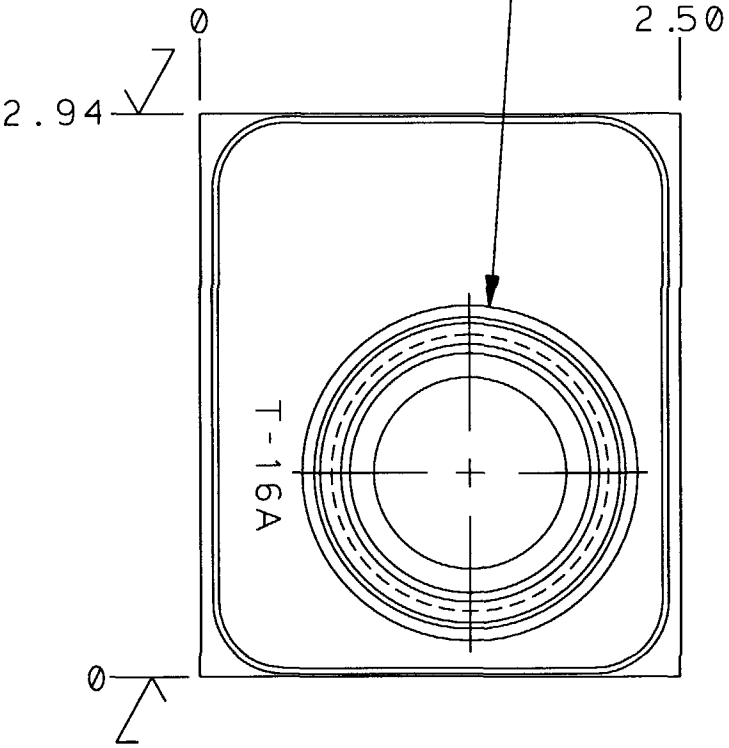

- NOTES:
- 1) SEALS: BUNA-N.
 - 2) ALUMINUM BODY: 3000 PSI MAXIMUM CONTINUOUS WORKING PRESSURE.
 - 3) ORDERING INFO: CXHA XAN DBM
- CARTRIDGE TO BE INSTALLED IN T-16A CAV. SEAL TYPE IN CXHA DETERMINES ITEM 3 SEAL TYPE.

3	500-001-014	SEALS	5
2	700-001	SEAL PLATE	1
1	153-143	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED					TITLE ISO 05 SANDWICH BODY-T-16A CAVITY T→A OR T→B				REVISION		PART NO.	
DIMENSION TOL					SCALE REF.				MATERIAL		DBM	
.x ±.030					1 = 1				ALUM. & NOTED			
.xx ±.015					DRAWN				HEAT TREAT & FINISH			
.xxx ±.005					CHECK							
ANGLE TOL ±½					RELEASE							
FINISH 80✓					DATE							
REMOVE ALL BURRS					DATE							
LET					REVISION							
DATE					DRN							
CHK					REL							

