



SYMBOL


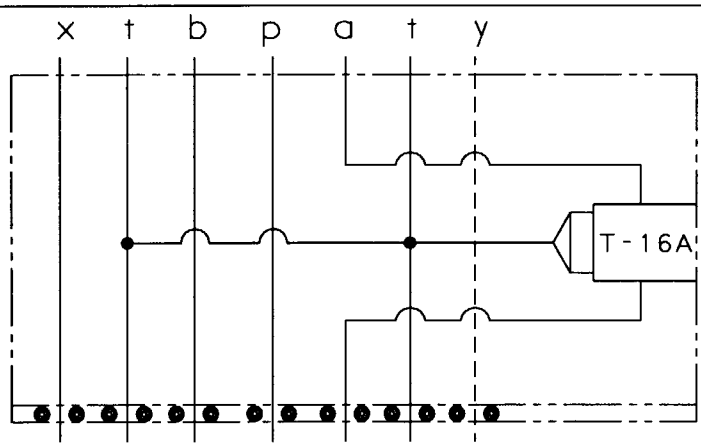


"A" PORT CONTROL

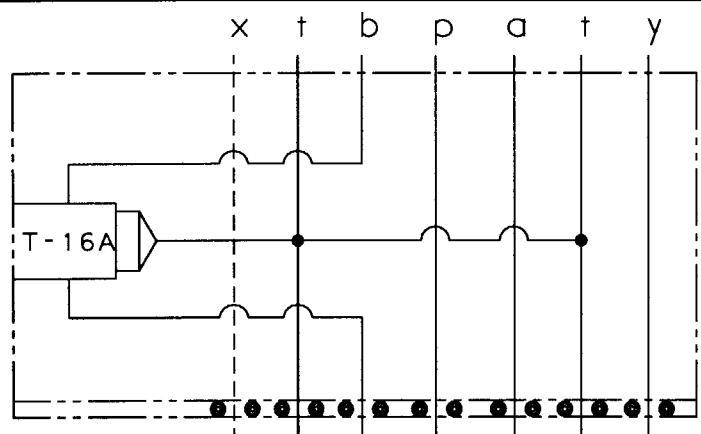


"B" PORT CONTROL

"Ø2H" PATTERN
.28 DIA THRU-TYP (4) PLACES

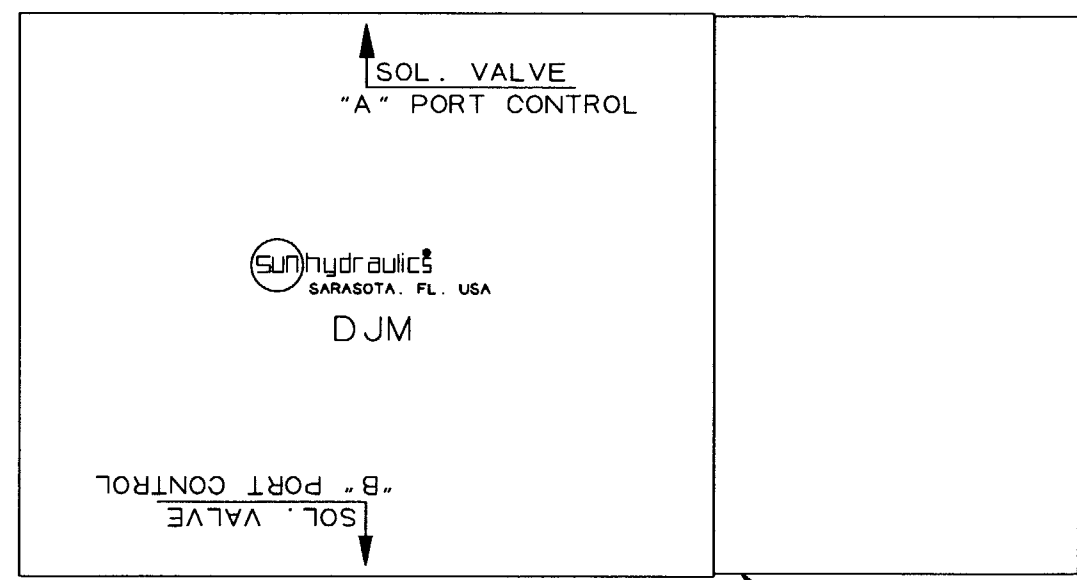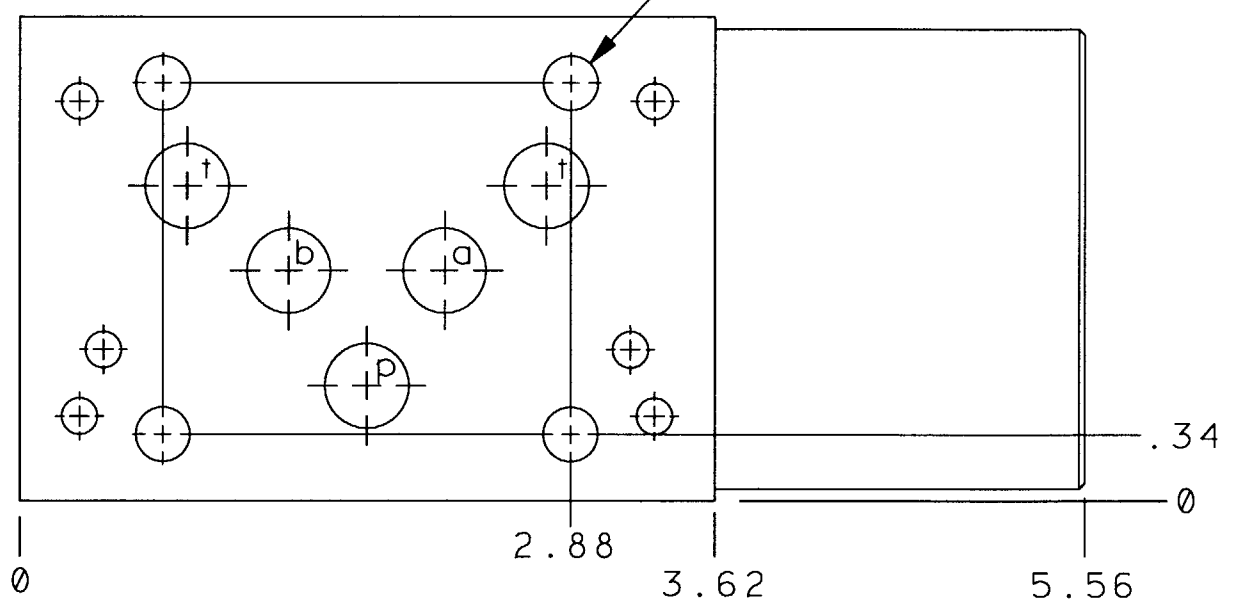

T-16A CAVITY
.031 L.S.DEPH

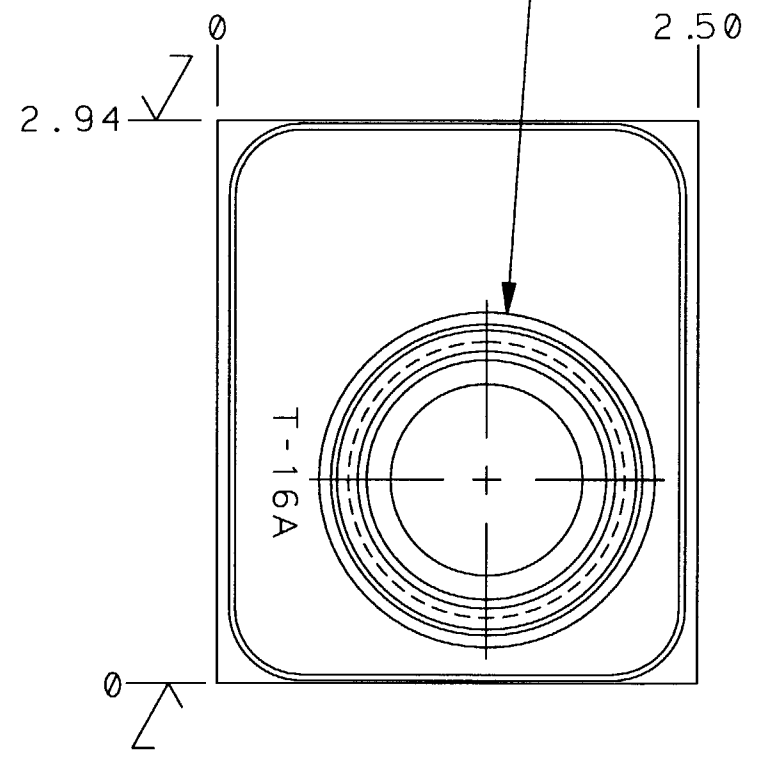

NOTES:

- 1) ALUMINUM BODY: 3000 PSI
MAXIMUM CONTINUOUS
WORKING PRESSURE.
- 2) ORDER SEAL KITS SEPARATELY:
FOR U.S. USE 990-120-010
FOR CETOP USE 990-120-011
- 3) ORDERING INFO:
CXHA XAN DBM

CARTRIDGE TO BE INSTALLED
IN T-16A CAV.

OUTLINE					1	153-144	BODY	1
					ITEM	PART NO.	PART NAME	QTY
TITLE "Ø2H" SANDWICH BODY-T-16A CAVITY T→A OR T→B					REVISION		PART NO. DJM	
UNLESS OTHERWISE SPECIFIED					SCALE REF. 1 = 1		MATERIAL ALUMINUM	
DIMENSION TOL .x ±.030 .xx ±.015 .xxx ±.005					DRAWN DA		HEAT TREAT & FINISH	
ANGLE TOL ±½					CHECK		DATE	
FINISH 80✓					DATE 05 AUG 93		DATE 15 AUG 93	
REMOVE ALL BURRS					RELEASE 4943		DATE 15 AUG 93	
LET					REVISION		DATE	
					DRN		CHK	
					REL			

SUN hydraulics CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983