




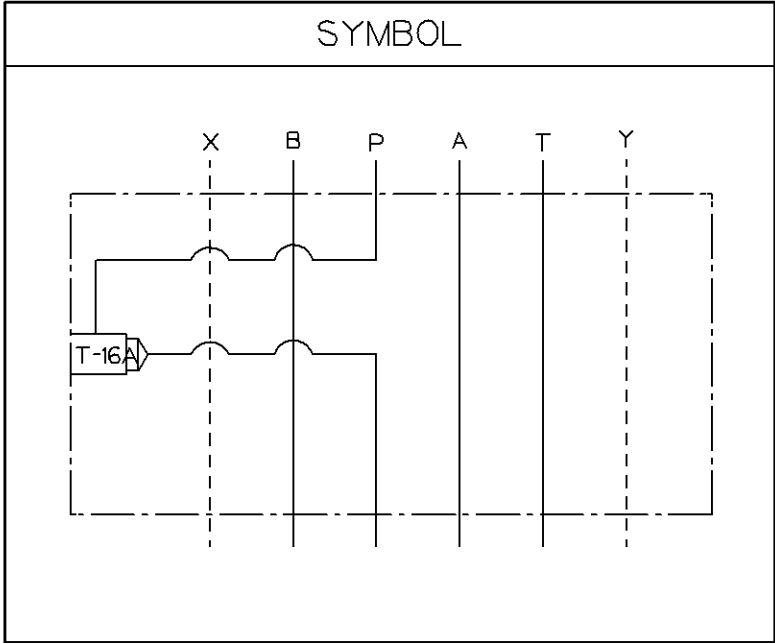

NOTES: 1) INSTALLATION REQUIRES SEAL KIT:
990-120-009 FOR D02 (U.S.)
990-120-012 FOR D02 (CETOP).



T-16A CAVITY
.031 L.S. DEPTH

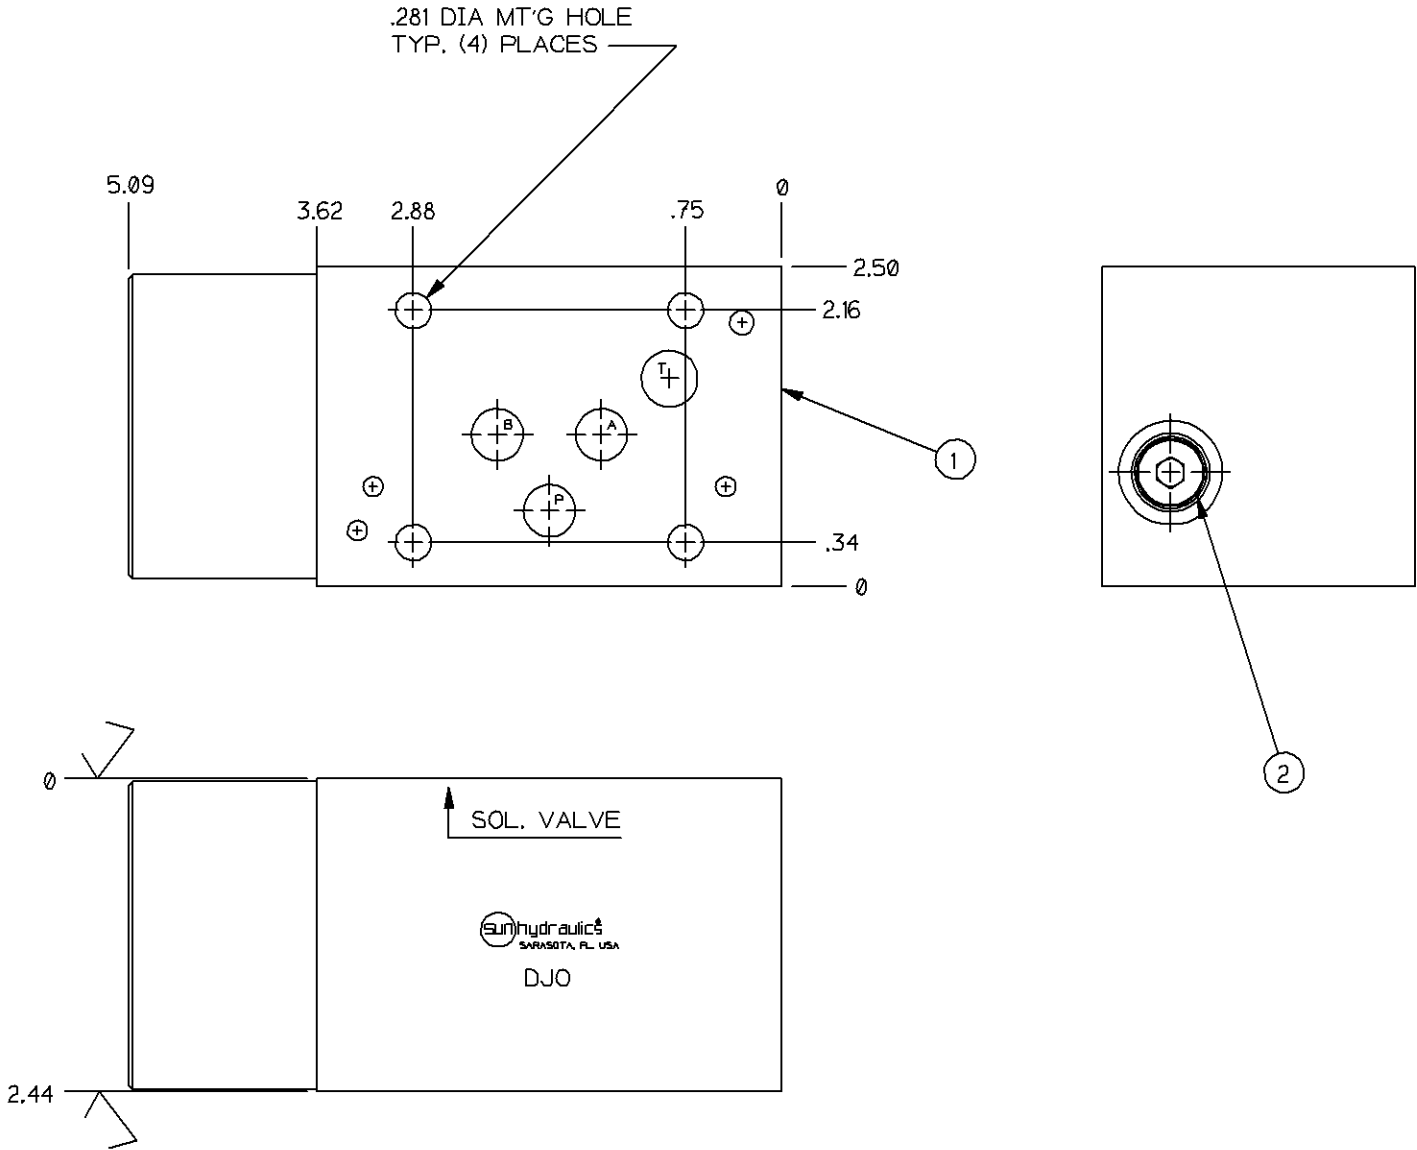

2	A330-006-006	HEX SOCKET O-RING BOSS PLUG	1
1	151-635	BODY	1
PART NO.		PART NAME	QTY

OUTLINE & ASSEMBLY				REVISION A		PART NO. DJO	
TITLE BODY - D02 SANDWICH T-16A CAVITY - METER IN "P"				SCALE REF 1:2		MATERIAL 6061 T-6 ALUM	
DRAWN DAS				CHECK JLB		RELEASE 1358	
DATE 07MAY87				DATE 07MAY87		DATE 07MAY87	
UNLESS OTHERWISE SPECIFIED .X = +/- .030 .XX = +/- .015 .XXX = +/- .005 ANGLE TOL $\pm$ 1 FINISH 16 V REMOVE ALL BURRS				HEAT TREAT & FINISH			
A REDRAWN IN CADD				26JUL01		MMS SMS 10632	
REVISION				DATE		DRN CHK REL	