






SYMBOL

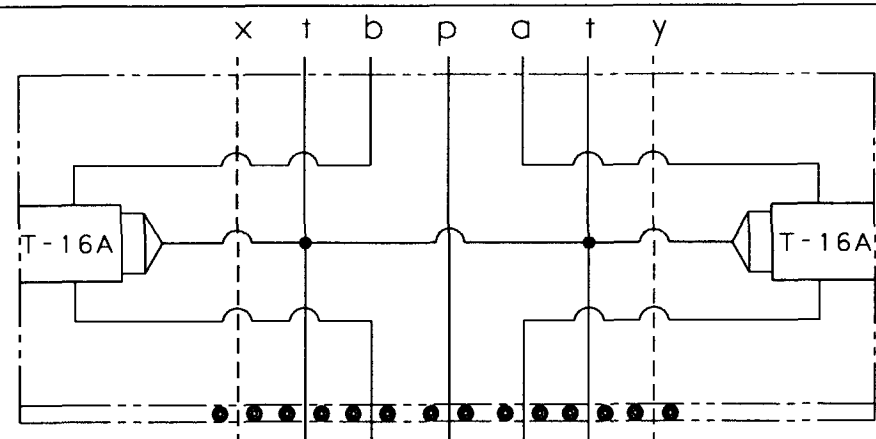

"Ø2H" PATTERN
.28 DIA THRU-TYP (4) PLACES

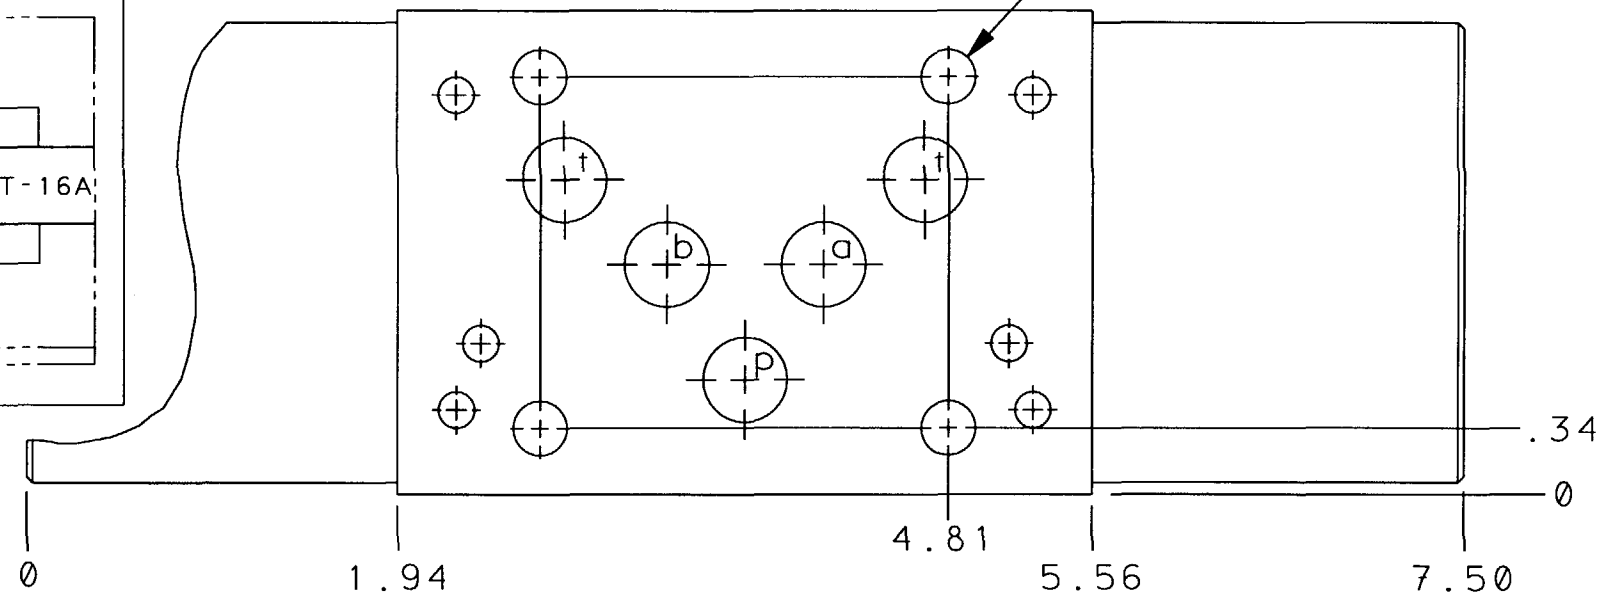

T-16A CAVITY
.031 L.S.DEPH
TYP (2) PLACES

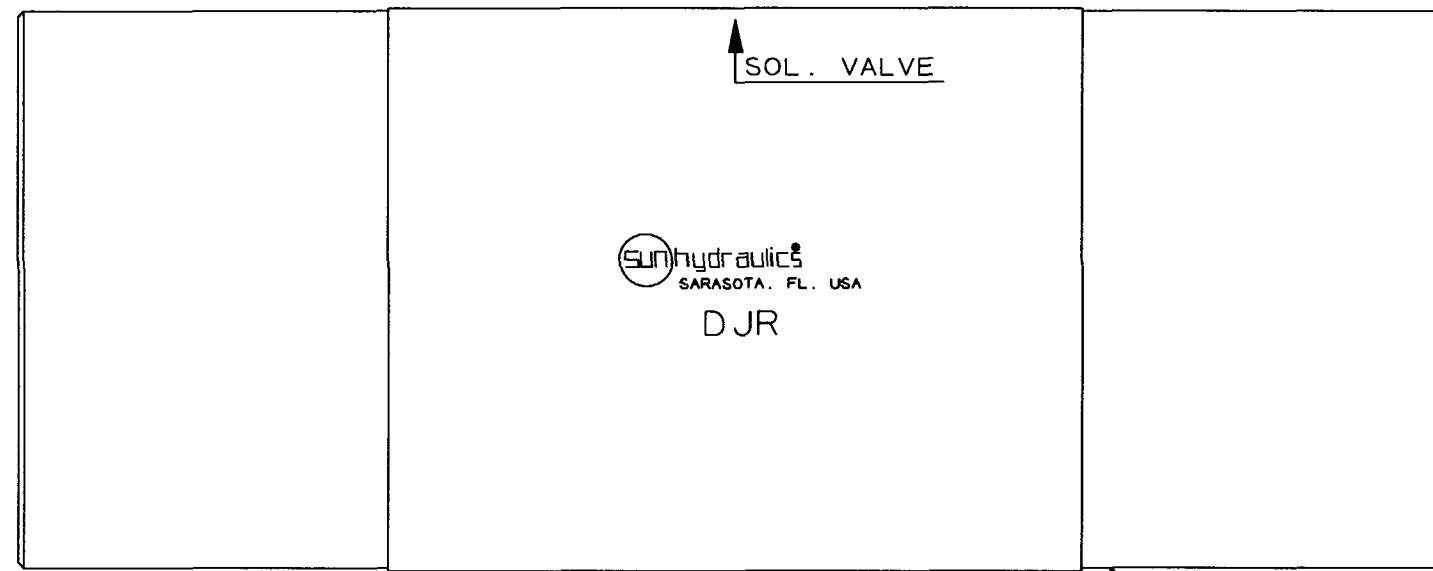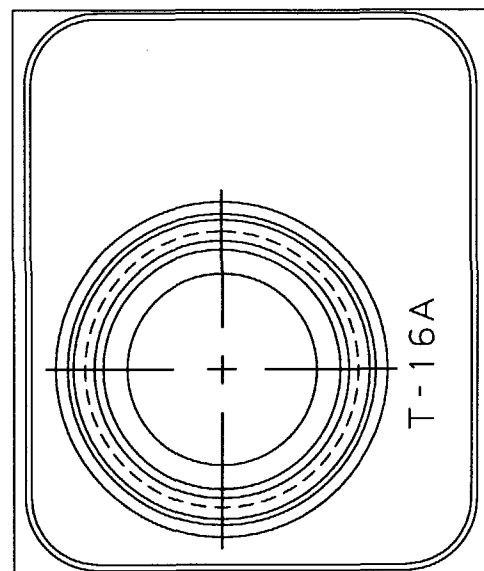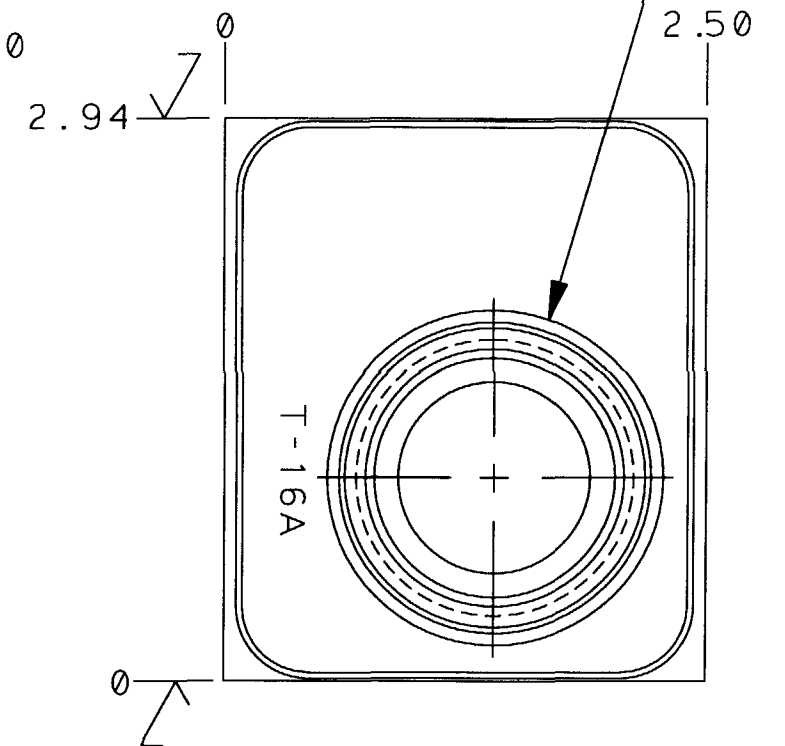

NOTES:

- 1) ALUMINUM BODY: 3000 PSI
MAXIMUM CONTINUOUS
WORKING PRESSURE.
- 2) ORDER SEAL KITS SEPARATELY:
FOR U.S. USE 990-120-010
FOR CETOP USE 990-120-011
- 3) ORDERING INFO:
CXHA XAN DJR

CARTRIDGE TO BE INSTALLED
IN T-16A CAV.

1	153-155	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED					TITLE "Ø2H" SANDWICH BODY-T-16A CAVITY T→A AND T→B			REVISION	PART NO.	
DIMENSION TOL .x ±.030 .xx ±.015 .xxx ±.005 ANGLE TOL ±½ FINISH 80✓ REMOVE ALL BURRS					SCALE 1 = 1	REF.	MATERIAL ALUMINUM			
DRAWN DAS					CHECK	RELEASE 4943	HEAT TREAT & FINISH			
DATE 06 AUG 93					DATE	DATE 25 AUG 93	 SUN hydraulics® CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983			
LET	REVISION	DATE	DRN	CHK	REL					