


- NOTES :
- 1) SEALS :BUNA-N.
 - 2) ALUMINUM BODIES : 3000 PSI
MAXIMUM CONTINUOUS WORKING
PRESSURE.
 - 3) ORDERING INFO:
CXJA XAN DKM


CARTRIDGE TO BE INSTALLED
IN T-18A CAV. SEAL TYPE
IN CXJA DETERMINES ITEM 3
& 4 SEAL TYPE.

NFPA D04 PATTERN
41 DIA THRU
TYP. (4) PLACES
.28 DIA THRU
TYP. (2) PLACES

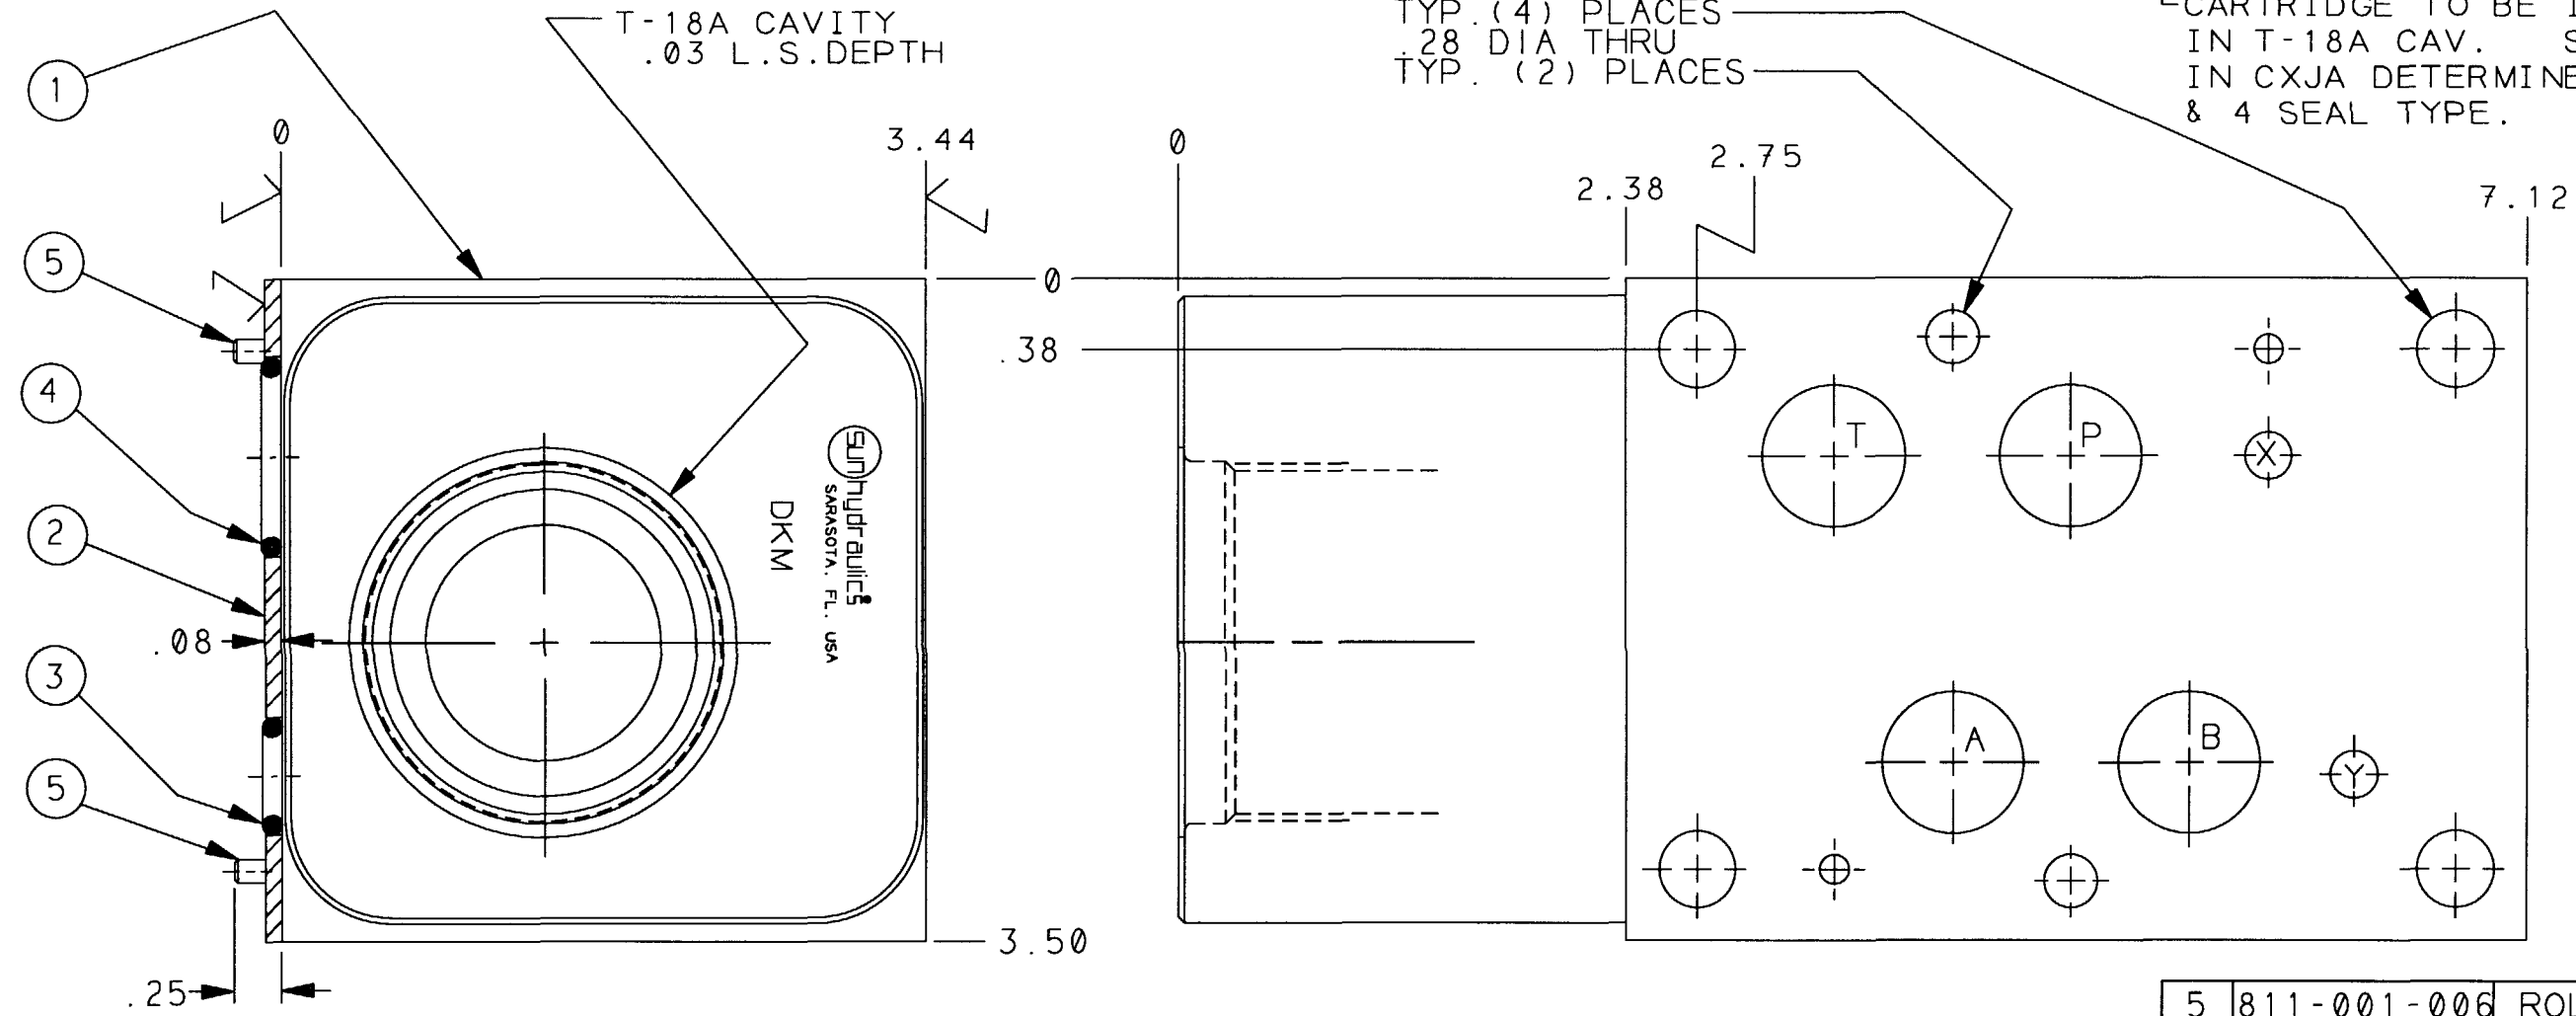

5	811-001-006	ROLL PIN	2
4	500-001-118	O-RING	4
3	500-001-111	O-RING	2
2	700-006	SEAL PLATE	1
1	153-145	BODY	1

ITEM	PART NO.	PART NAME	QTY
------	----------	-----------	-----

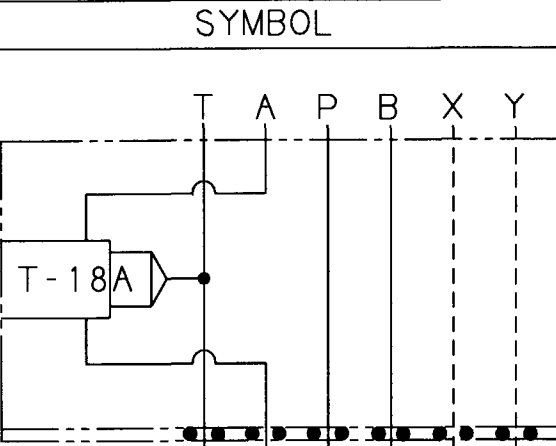

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED		TITLE ISO 07 SANDWICH BODY-T-18A CAVITY T-A		REVISIONPART NO.	
DIMENSION TOL		SCALE REF.		MATERIAL	
.x ±.030		1 = 1		ALUM & NOTED	
.xx ±.015		DRAWN DAS		HEAT TREAT & FINISH	
.xxx ±.005		CHECK			
ANGLE TOL ± 1/2		RELEASE			
FINISH 80V		DATE			
REMOVE ALL BURRS		DATE			
		DATE			
		16AUG93		25AUG93	

