
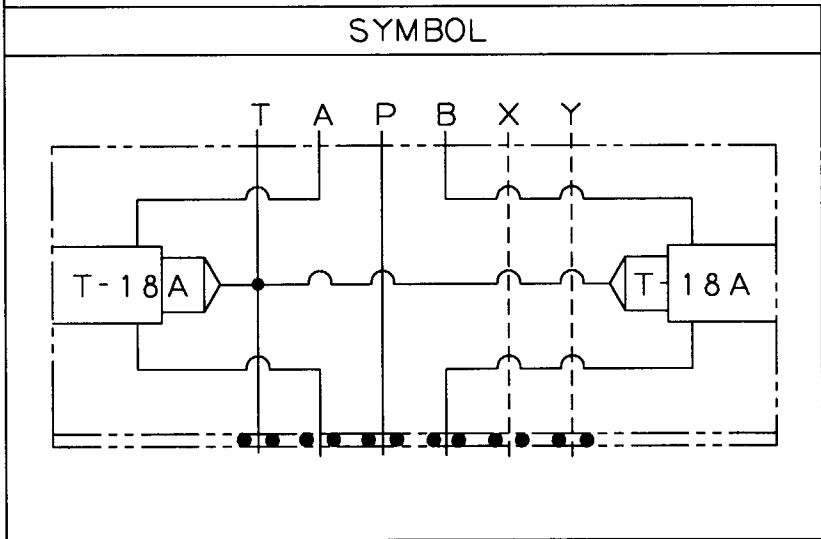


- NOTES:
- 1) SEALS: BUNA-N.
 - 2) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS WORKING
PRESSURE.
 - 3) ORDERING INFO:
CXJA XAN DKR
- CARTRIDGE TO BE INSTALLED
IN T-18A CAVS. SEAL TYPE
IN CXJA DETERMINES ITEM 3
& 4 SEAL TYPE.

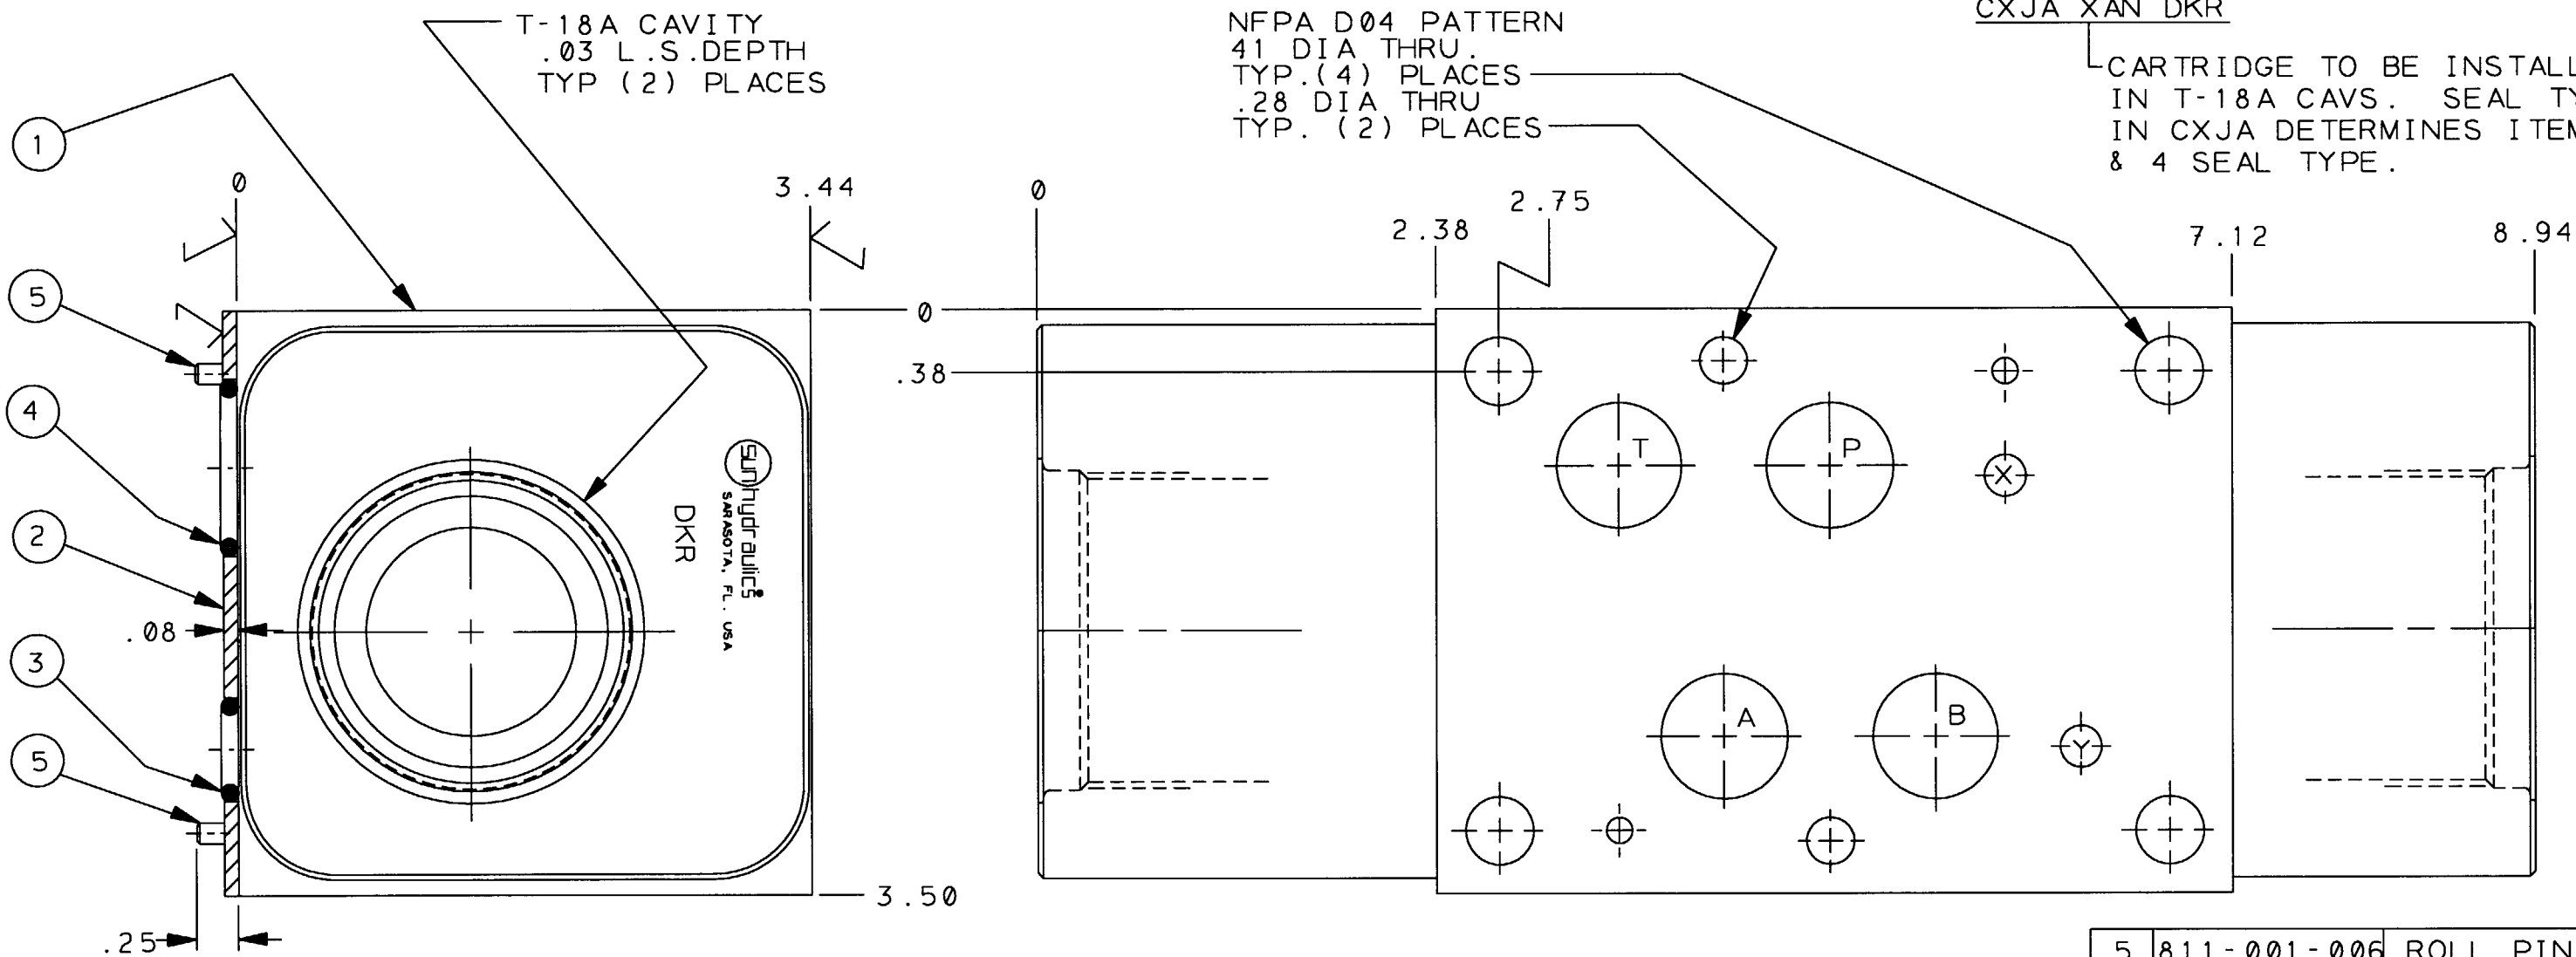

5	811-001-006	ROLL PIN	2
4	500-001-118	O-RING	4
3	500-001-111	O-RING	2
2	700-006	SEAL PLATE	1
1	153-156	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY				REVISION	PART NO.
TITLE ISO 07 SANDWICH BODY-T-18A CAVITY T→A & T→B				A	DKR
UNLESS OTHERWISE SPECIFIED		SCALE REF.		MATERIAL	
DIMENSION TOL		1 = 1		ALUM & NOTED	
.x = ±.030		DRAWN		HEAT TREAT & FINISH	
.xx = ±.015		DAS		DATE	
.xxx = ±.005		CHECK		DATE	
ANGLE TOL ± 1/2		RELEASE		DATE	
FINISH 80✓		DATE		DATE	
REMOVE ALL BURRS		DATE		DATE	
A	MOVED PORT "X" DOWN .062"	27SEP96	DAS	7565	
LET	REVISION	DATE	DRN	CHK	REL