
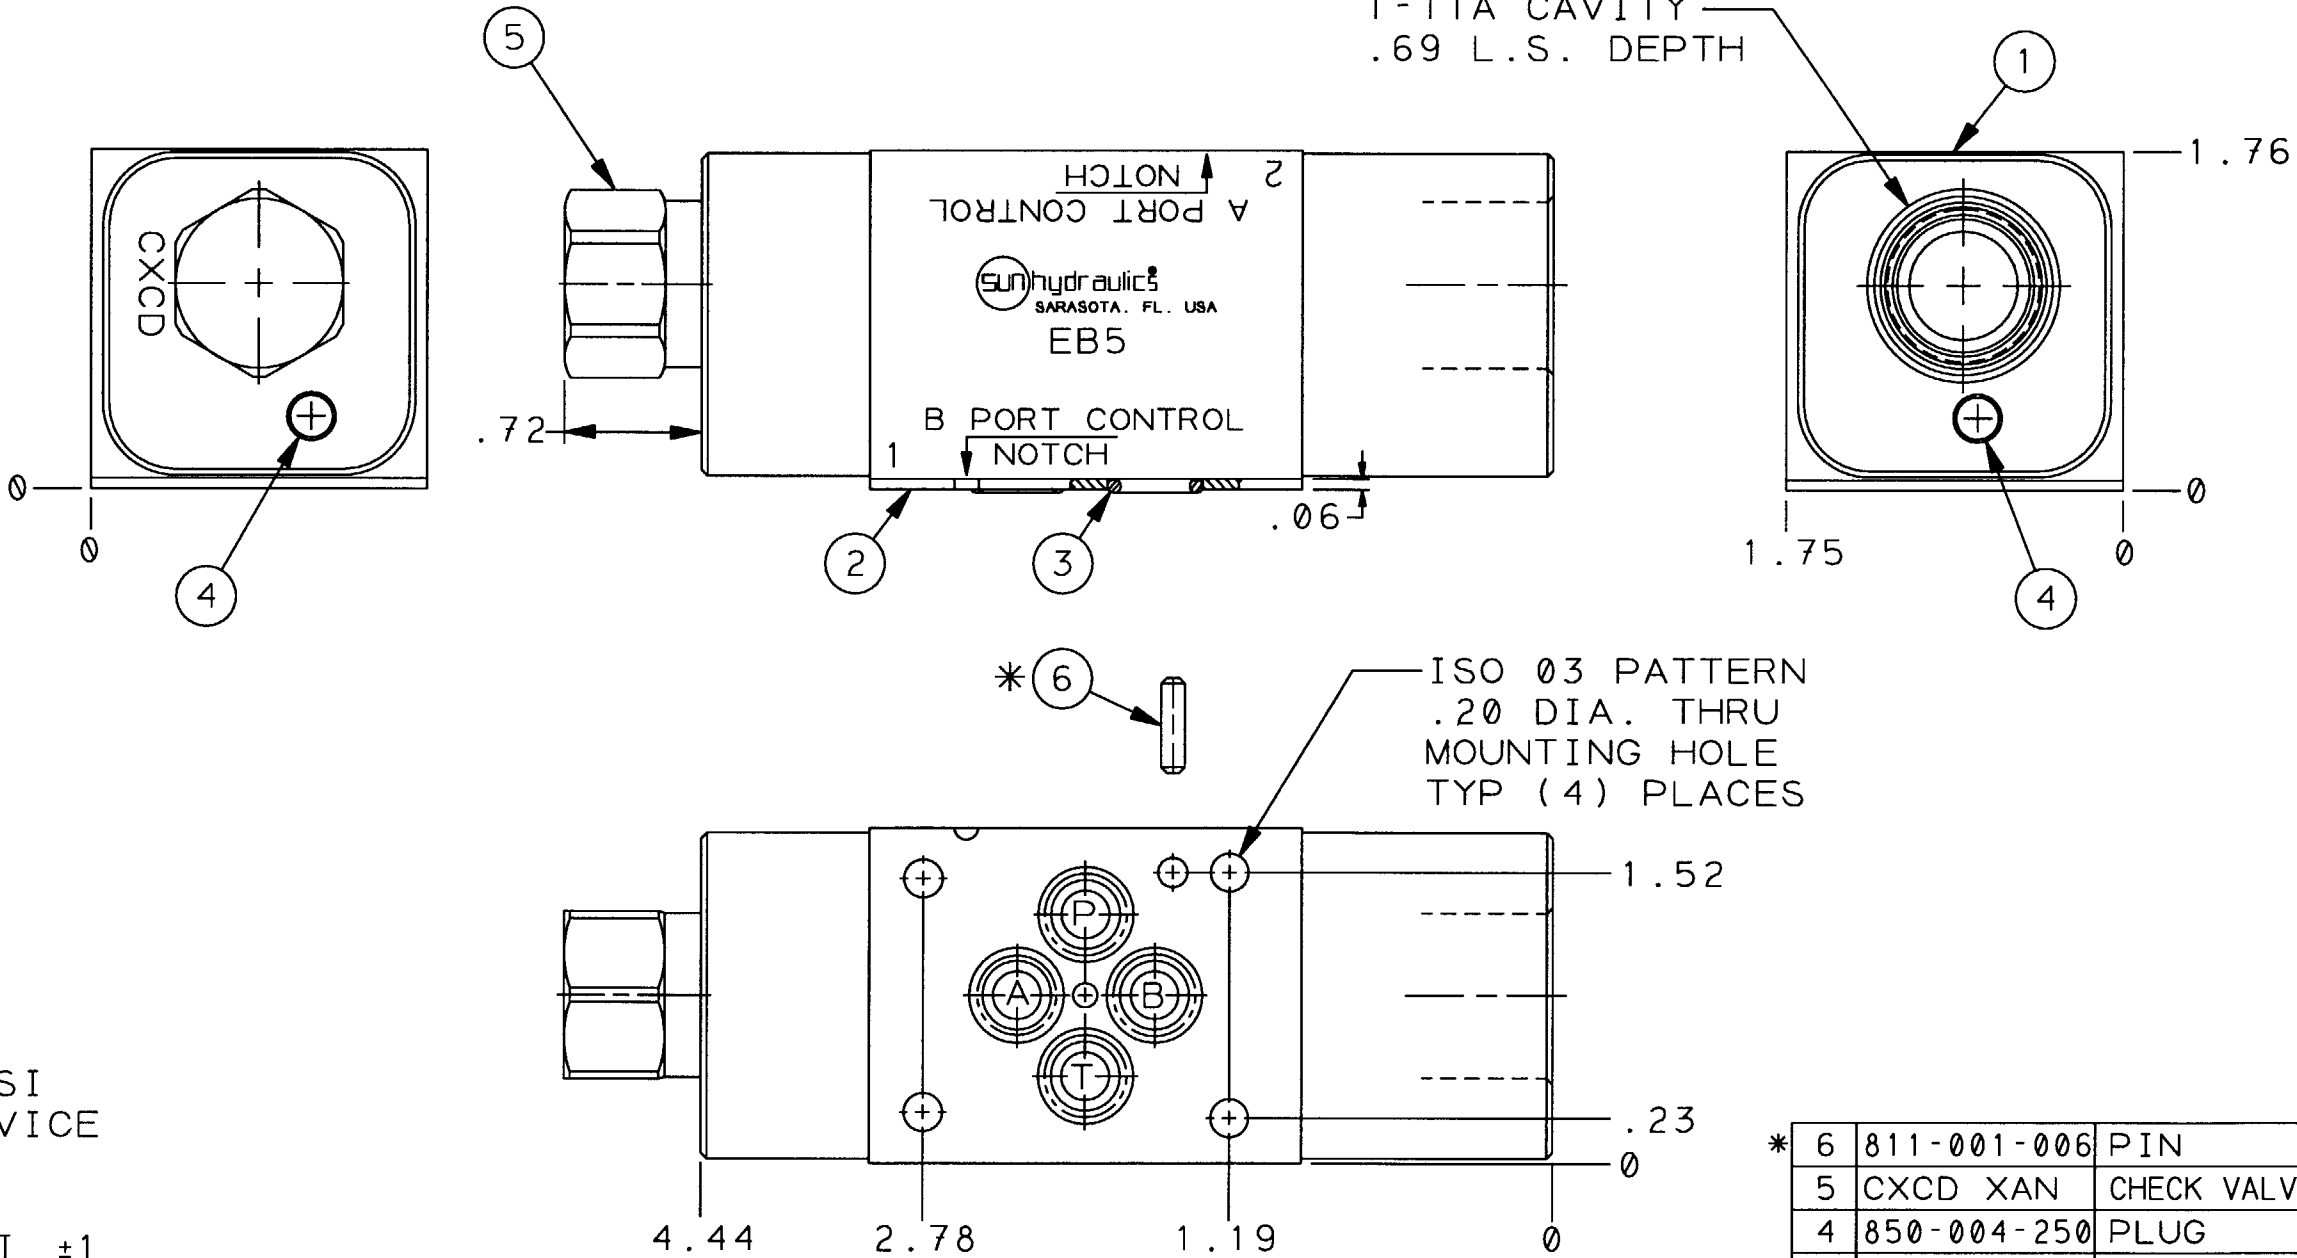


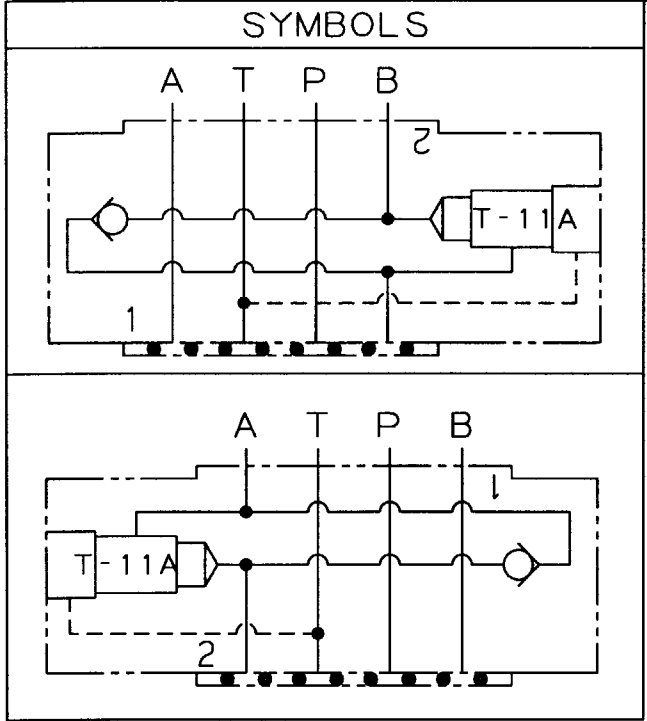

NOTES :

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 3) CXCD XAN CARTRIDGE:
CRACKING PRESSURE: 4 PSI $\pm$ 1
CHECK SEAT: STEEL
- 4) ORDERING INFO:
RSDC FAN EB5

CART. TO BE INSTALLED IN
T-11A CAV. SEAL TYPE IN RSDC
DETERMINES ITEM 5 SEAL TYPE

5) CUSTOMER TO INSTALL LOCATING
* PIN (ITEM 6) FOR FUNCTIONAL
ORIENTATION DESIRED.

						UNLESS OTHERWISE SPECIFIED	TITLE ISO 03 SANDWICH-A OR B PORT SEQUENCE W/FF CHECK			
						DIMENSION TOL	SCALE	REF.	MATERIAL	
						.x = ±.030	1:1	YSOB FAN	ALUMINUM	
						.xx = ±.015				
						.xxx = ±.005				
						ANGLE TOL ± 1/2	DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
						FINISH 80✓	BR5	JLB	3154	
A	ADDED ITEM 6 & REVISED STAMPING.	19 OCT92	BRS		4080	REMOVE ALL BURRS	DATE	DATE	DATE	
LET	REVISION	DATE	DRN	CHK	REL		6-25-91	6-26-91	7-1-91	