





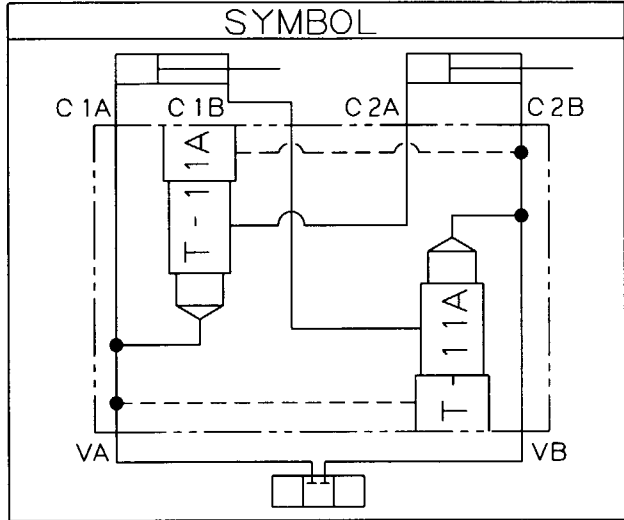


NOTE:
1) ALUMINUM BODIES: 3000 PSI
MAX. CONTINUOUS SERVICE PRESSURE.

T-11A CAVITY
.688 L.S. DEPTH
TYP (2) PLACES

.34 DIA THRU
MTG HOLE
TYP (2) PLACES

3RD ANGLE PROJECTION		REVISION	PART NO.	EI *
PART NO.	BODY DASH NO.	PORT SIZE - ALL PORTS		
EIA	-001	.250-18 NPTF		
EIB	-002	.375-18 NPTF		
EIC	-003	.500-14 NPTF		
EII	-004	SUN STD SAE-6		
EIJ	-005	SUN STD SAE-8		
EIK	-006	SUN STD SAE-10		
EIT	-007	.250-19 BSPP		
EIU	-008	.375-19 BSPP		
EIV	-009	.500-14 BSPP		

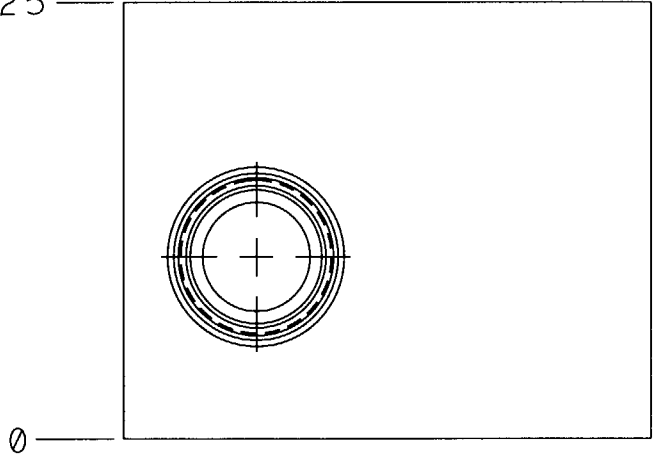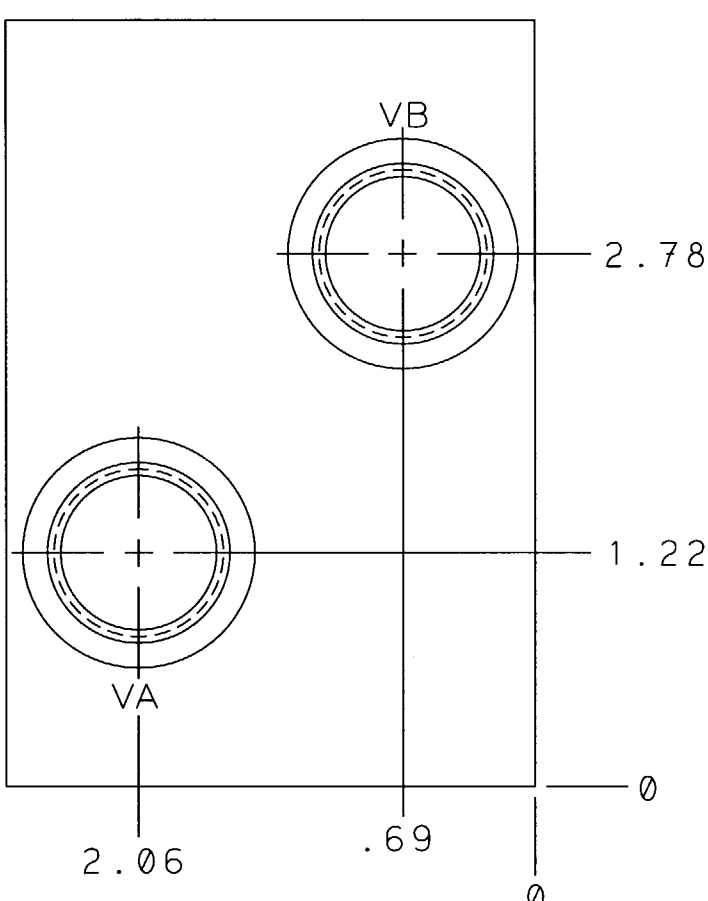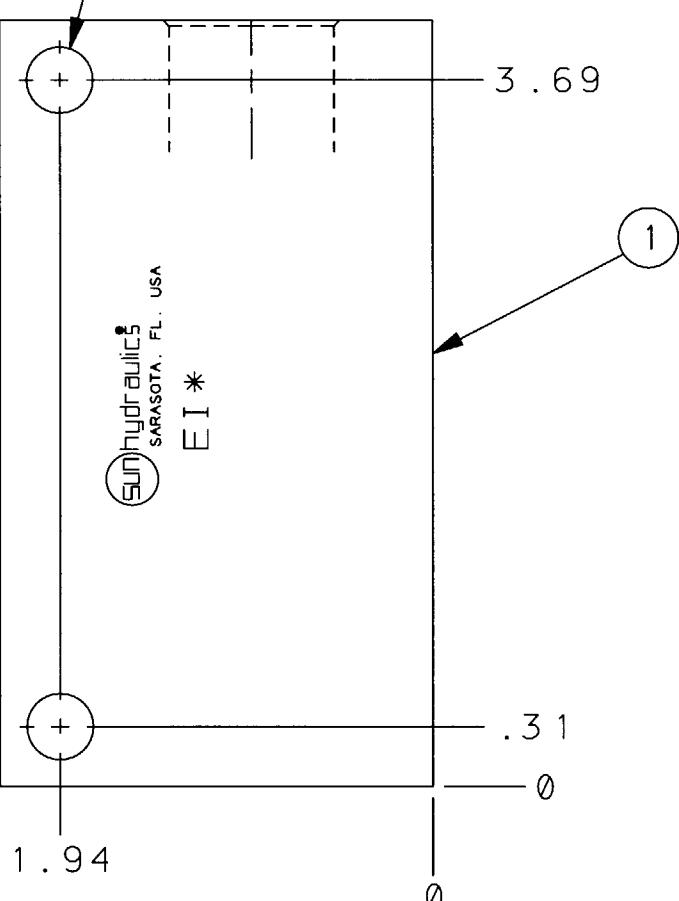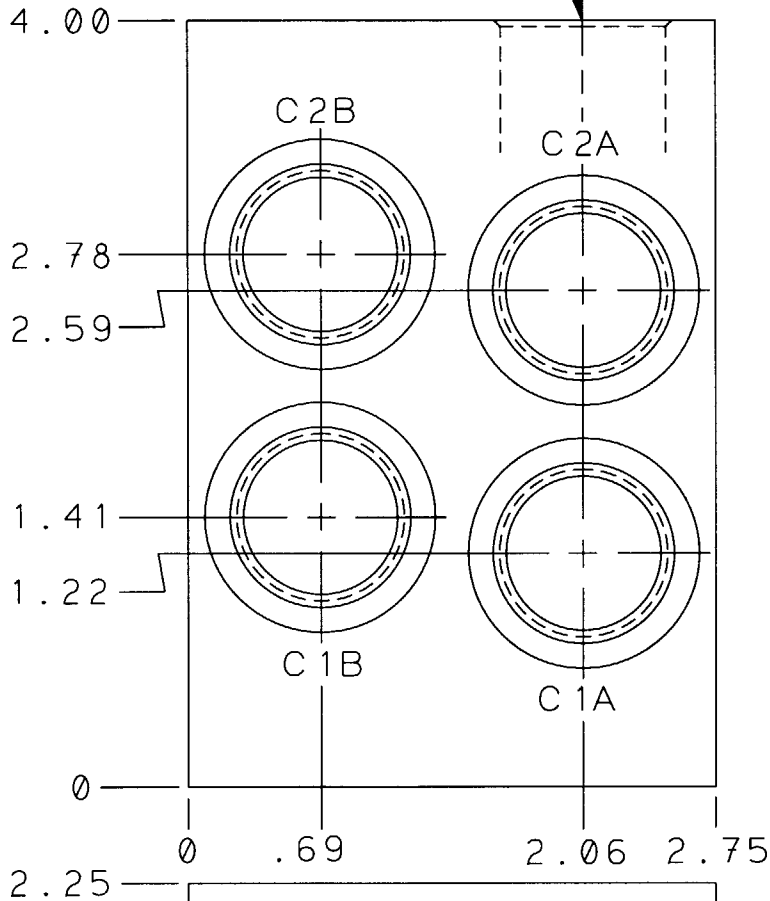

						UNLESS OTHERWISE SPECIFIED	TITLE BODY-DUAL SERIES 1 DIRECT ACTING SEQUENCE VALVES			REVISION	PART NO. EI*
						DIMENSION TOL	SCALE	REF.	MATERIAL	 sun hydraulics[®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983	
						.x = ±.030	1:1		ALUMINUM		
						.xx = ±.015					
						.xxx = ±.005					
						ANGLE TOL ± 1/2	DRAWN	CHECK	RELEASE		
					FINISH 80✓	DA5	STW	6548	HEAT TREAT & FINISH		
						REMOVE ALL BURRS	DATE	DATE	DATE		
LET	REVISION	DATE	DRN	CHK	REL		10MAY95	10MAY95	10MAY95		