
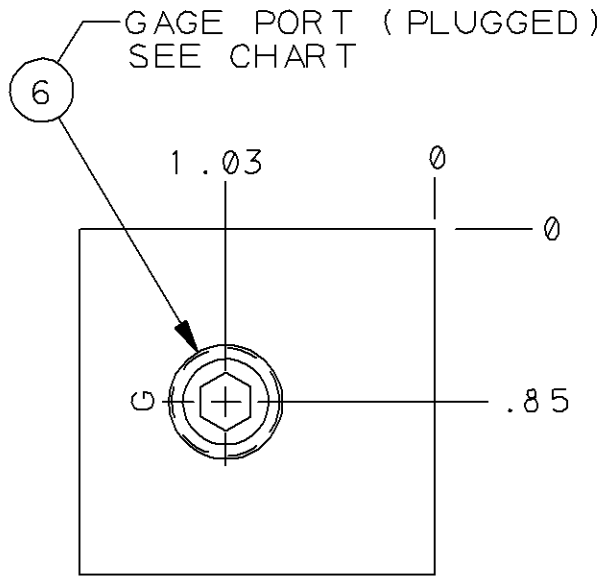





NOTES :

- 1) ALUMINUM BODIES - 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 2) SEALS: BUNA-N.
- *3) CUSTOMER TO INSTALL LOCATING
PIN (ITEM 5) FOR FUNCTIONAL
ORIENTATION DESIRED.

REVISION	PART NO.
B	FBO

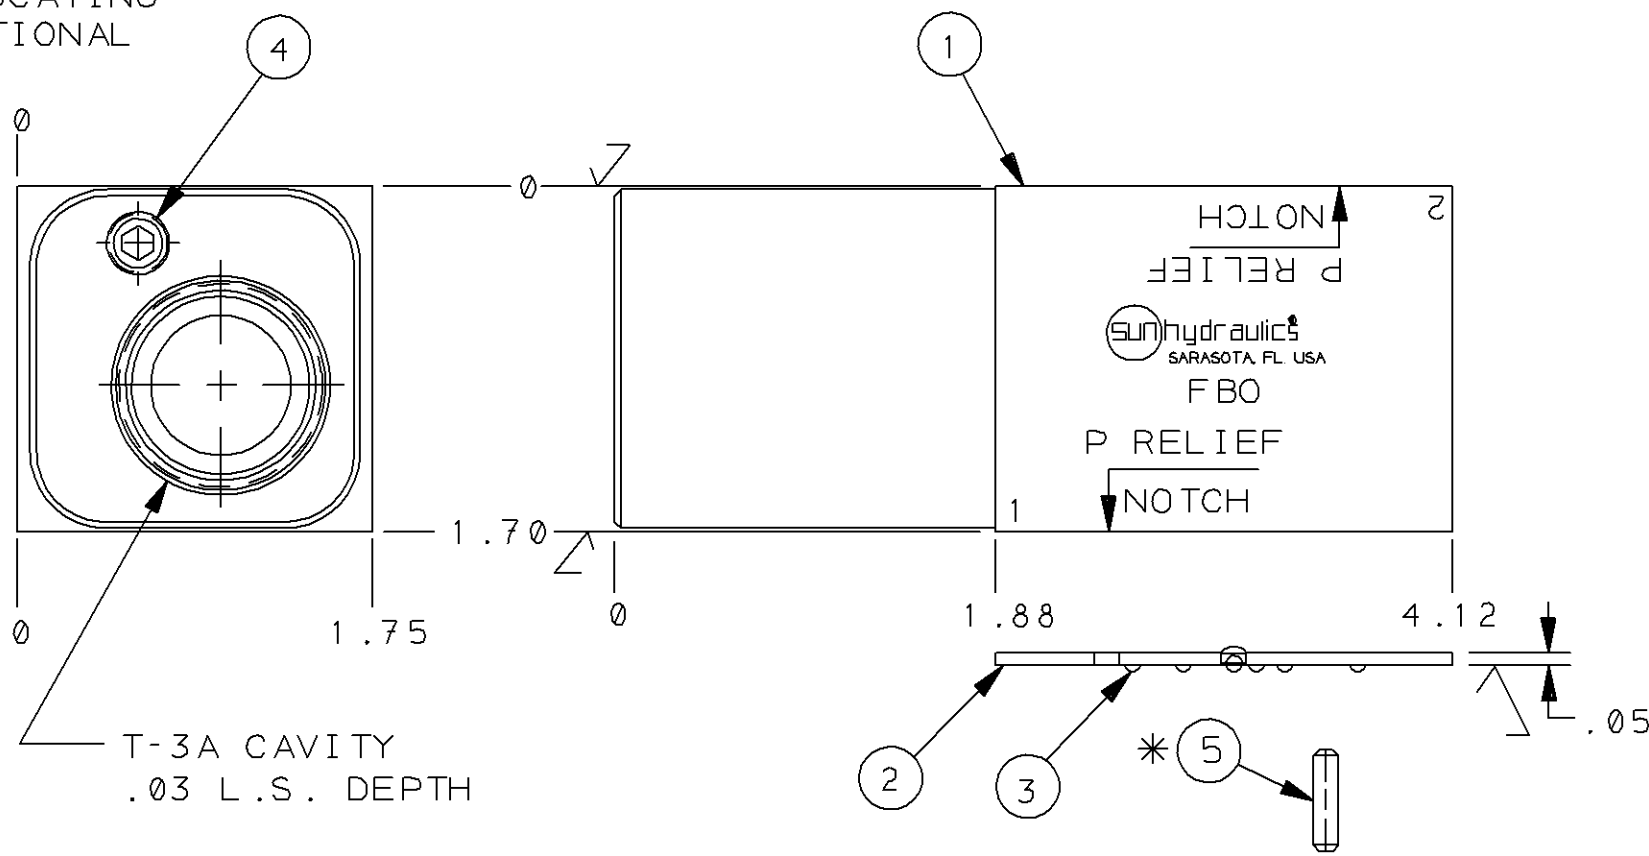

MODEL NUMBER	PORT G (PLUGGED)	BODY NUMBER
FBO	.25 NPTF	152-910-001
FBO/M	.25 BSPP	152-910-003

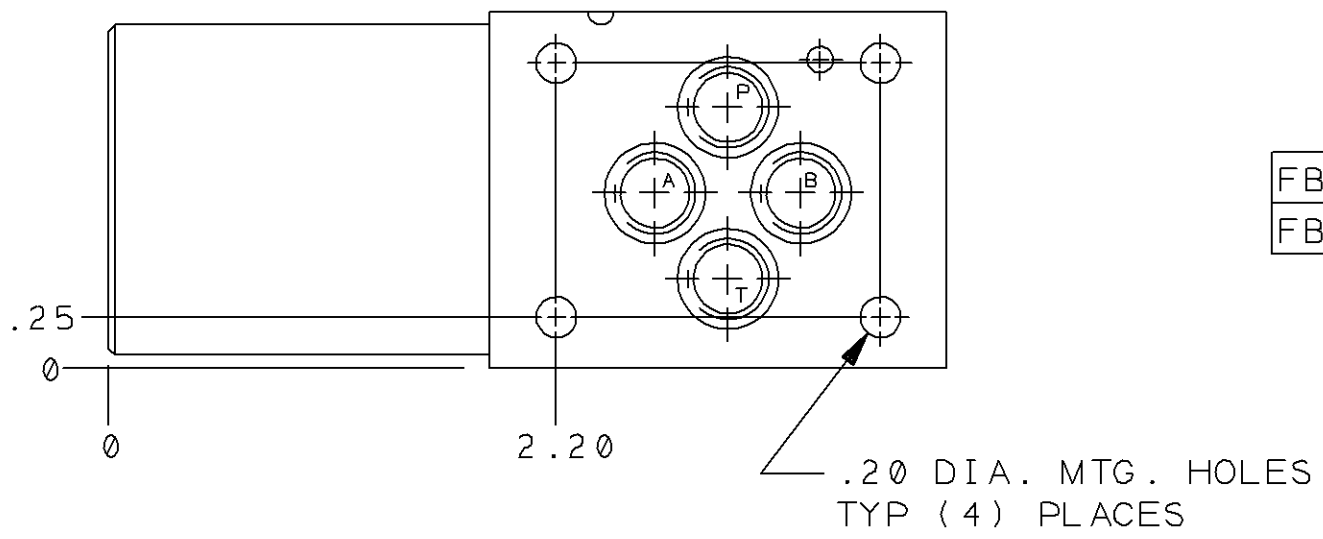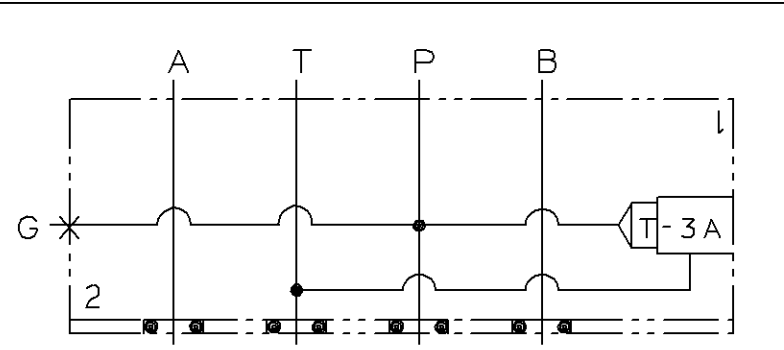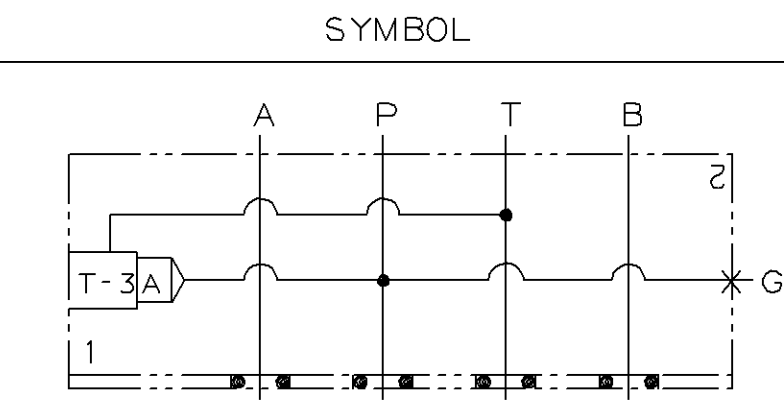

FBO/M	6	330-018-002	PLUG	1
FBO	6	340-003	PLUG	1
	*5	811-001-006	ROLL PIN	1
	4	340-001	PLUG	1
	3	500-001-012	"O" RING	4
	2	700-002	PLATE	1
	1	152-910-SEE CHART	BODY	1
ITEM	PART NO.		PART NAME	QTY

OUTLINE & ASSEMBLY						REVISION	PART NO.
TITLE ISO 03 SANDWICH BODY-T-3A CAVITY "P" TO "T" RELIEF						B	FBO
UNLESS OTHERWISE SPECIFIED			SCALE REF.		MATERIAL		
DIMENSION TOL			1:1		ALUMINUM BODY		
.x = ±.030			DRAWN		HEAT TREAT & FINISH		
.xx = ±.015			DAS		3920		
.xxx = ±.005			DATE		DATE		
ANGLE TOL ± 1/2			8-19-92		8-20-92		
FINISH 80✓			DATE		DATE		
REMOVE ALL BURRS			8-19-92		8-20-92		
B	CHARTED BODY	22 JUN 01	SMS	DSS	10568		
A	REVISED STAMPING.	27 OCT 92	BRS		4080		
LET	REVISION	DATE	DRN	CHK	REL		

SUN hydraulics CORPORATION
1500 WEST UNIVERSITY PKWY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1200