
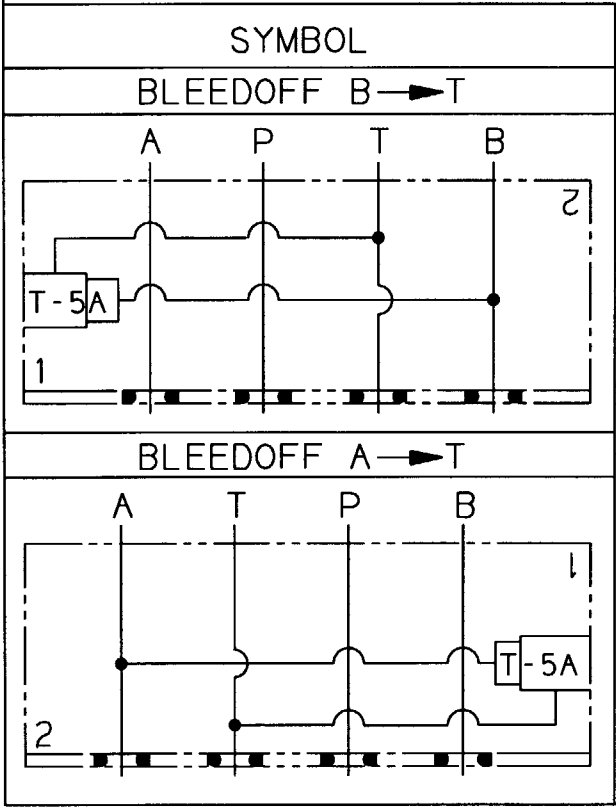


NOTES :

- 1)SEALS :BUNA -N
2)ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE .
*3)CUSTOMER TO INSTALL
LOCATING PIN (ITEM 5) FOR
FUNCTIONAL ORIENTATION
DESIRED .

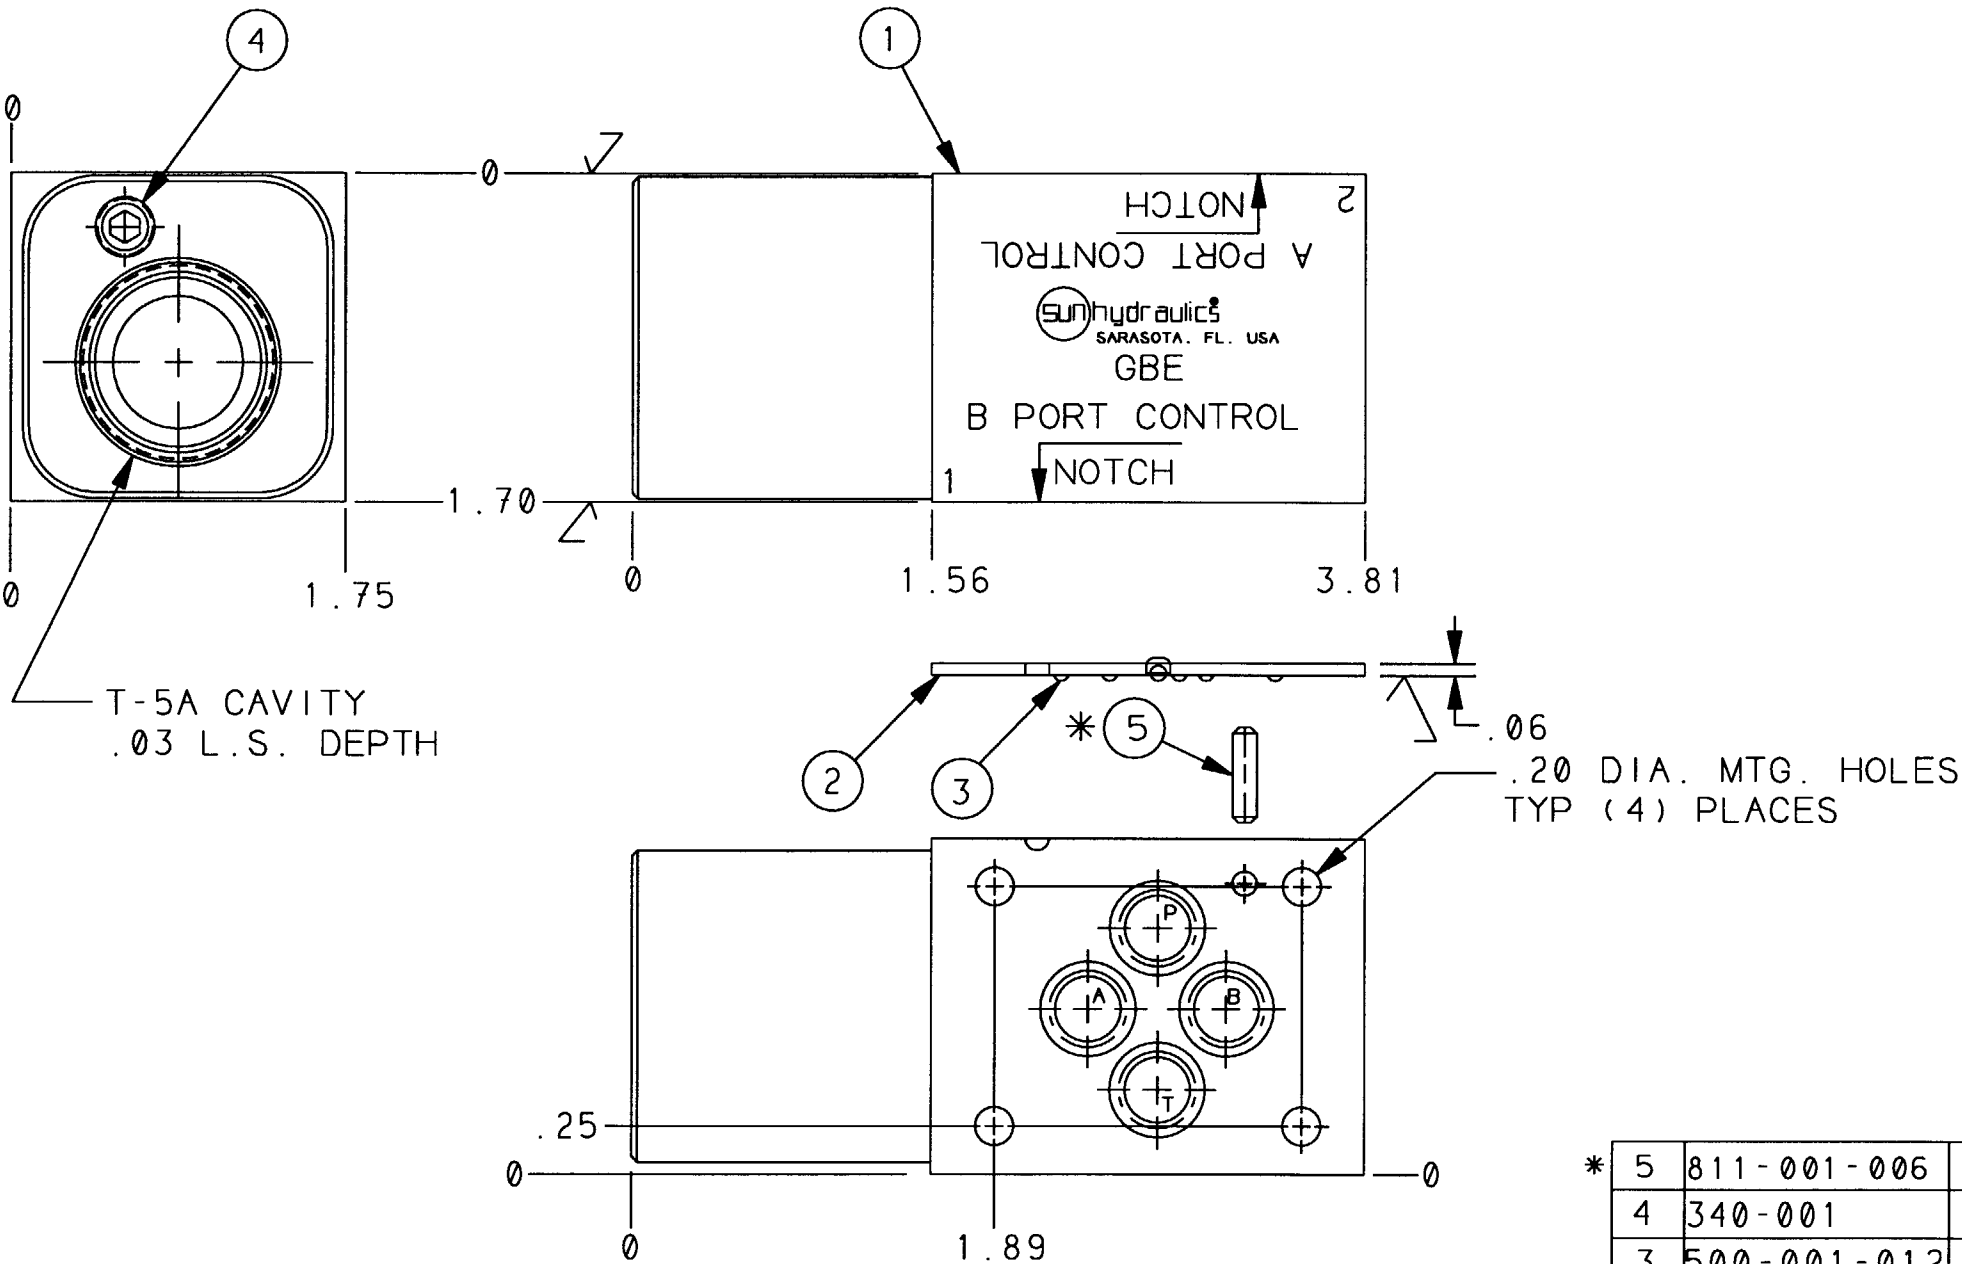

* 5	811-001-006	PIN	1
	4	340-001	PLUG
	3	500-001-012	"O"RING
	2	700-002	PLATE
	1	152-088	BODY
ITEM	PART NO.	PART NAME	QTY

A	REVISED STAMPING & ADDED ITEM 5.	28 OCT92	BRS	4080
	REVISION	DATE	DRN	CHK
	LET	REL		

UNLESS OTHERWISE SPECIFIED			
DIMENSION TOL			
.x = ±.030			
.xx = ±.015			
.xxx = ±.005			
ANGLE TOL ± 1/2			
FINISH 80			
REMOVE ALL BURRS			
TITLE D03 SANDWICH BODY-T5A CAV. BLEEDOFF A → T OR B → T			
SCALE REF. 1/1 DOUBLE = GBE			
DRAWN BR5	CHECK R/B	RELEASE 2066	MATERIAL ALUMINUM BODY
DATE 5/4/89	DATE 5/5/89	DATE 5/11/89	HEAT TREAT & FINISH

REVISION	PART NO.	GBE
A		

 SUN hydraulics® CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983	
---	--