

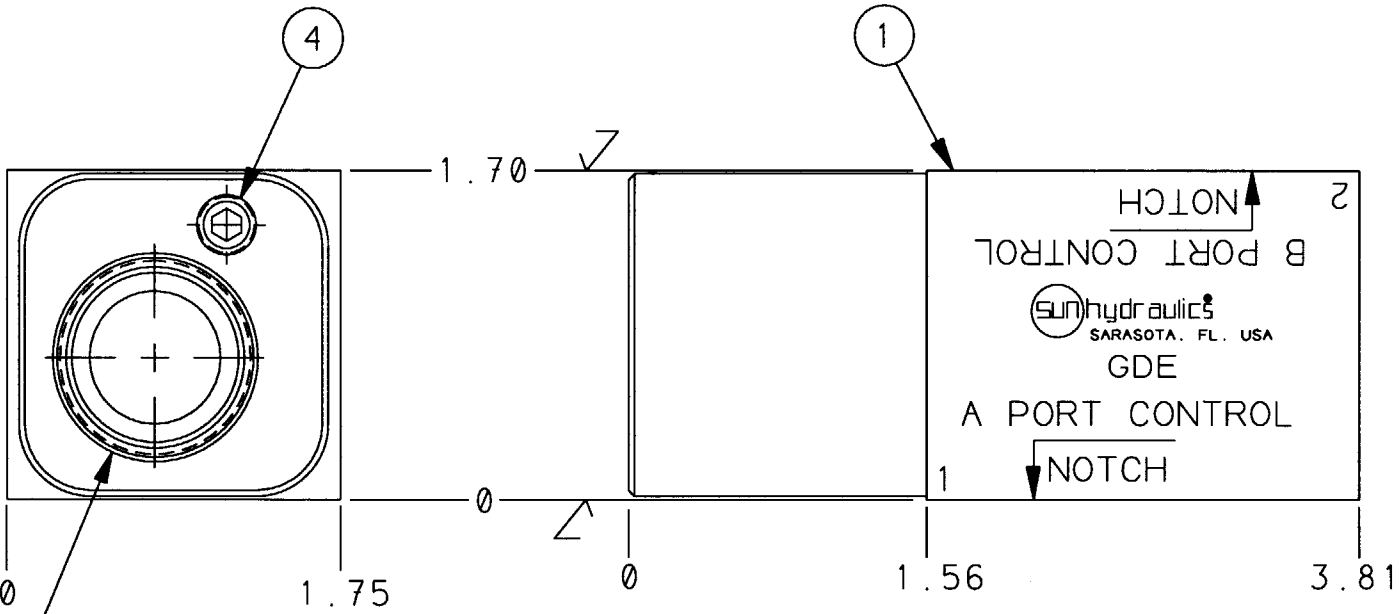


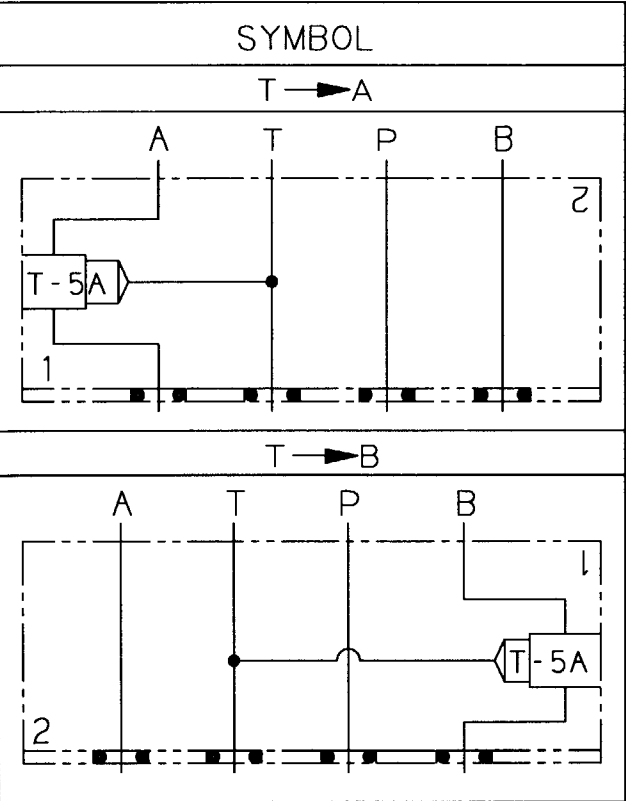

T-5A CAVITY
.03 L.S. DEPTH

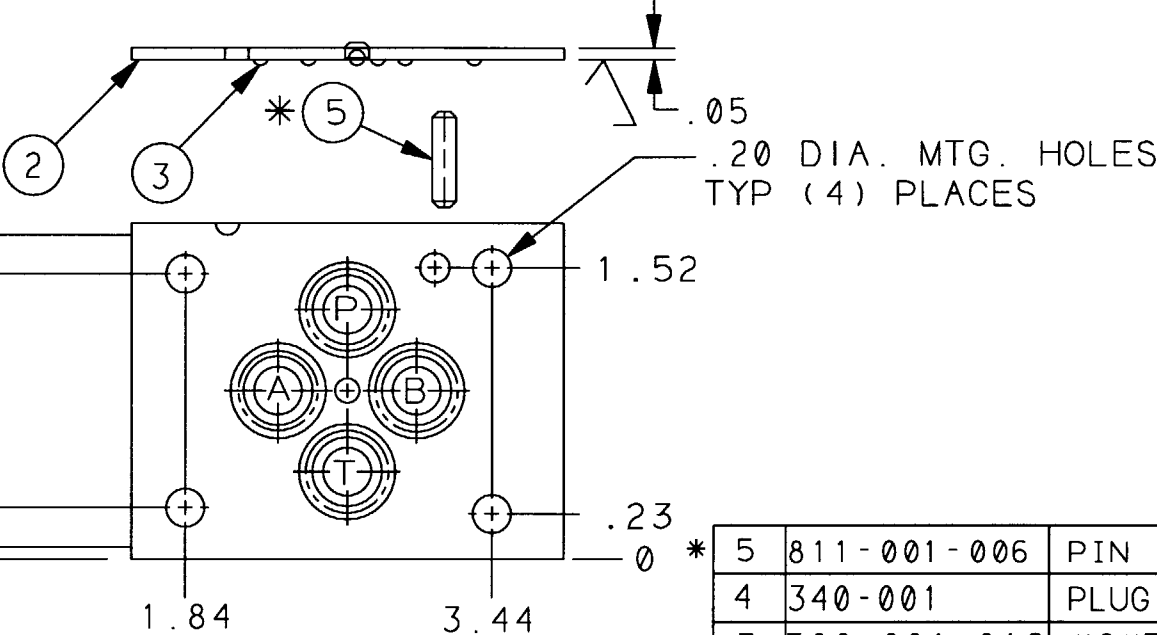

- NOTES :
- 1)SEALS: BUNA-N
 - 2)ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
 - *3)CUSTOMER TO INSTALL
LOCATING PIN (ITEM 5) FOR
FUNCTIONAL ORIENTATION
DESIRED.
 - 4)ORDERING INFO:
CXFA XAN GDE

CART. TO BE INSTALLED IN
T-5A CAV. SEAL TYPE IN
CXFA DETERMINES ITEM 3
SEAL TYPE

5	811-001-006	PIN	1
4	340-001	PLUG	1
3	500-001-012	"O"RING	4
2	700-002	PLATE	1
1	153-096	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY					TITLE ISO 03 SANDWICH BODY-T-5A CAVITY T → A OR T → B		REVISION		PART NO.		GDE	
UNLESS OTHERWISE SPECIFIED					SCALE REF. 1/1 GDW		MATERIAL ALUMINUM BODY		HEAT TREAT & FINISH		 CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983	
DIMENSION TOL					DRAWN DAS		CHECK					
.x ±.030 .xx ±.015 .xxx ±.005					DATE 21 JUL 93		DATE 25 JUL 93					
ANGLE TOL ±°					RELEASE 4943		DATE 25 JUL 93					
FINISH 80✓												
REMOVE ALL BURRS												
LET	REVISION				DATE	DRN	CHK	REL				