


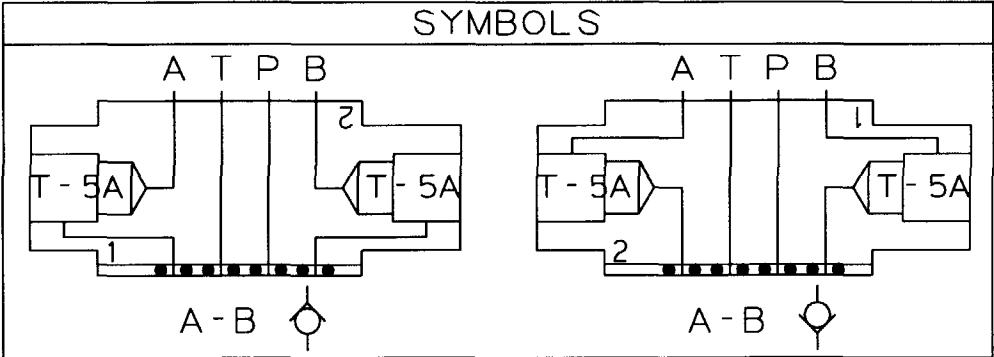
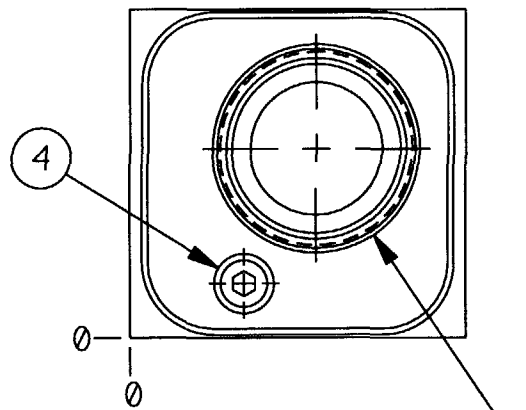


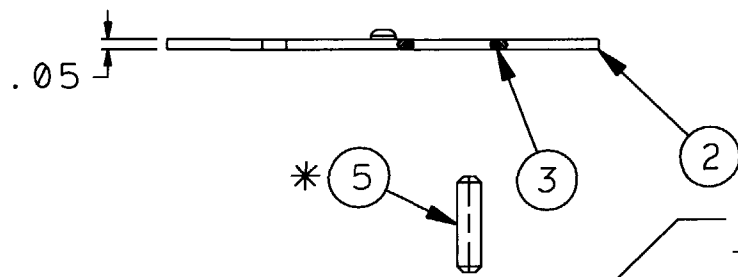


REVISION	PART NO.
A	GDZ

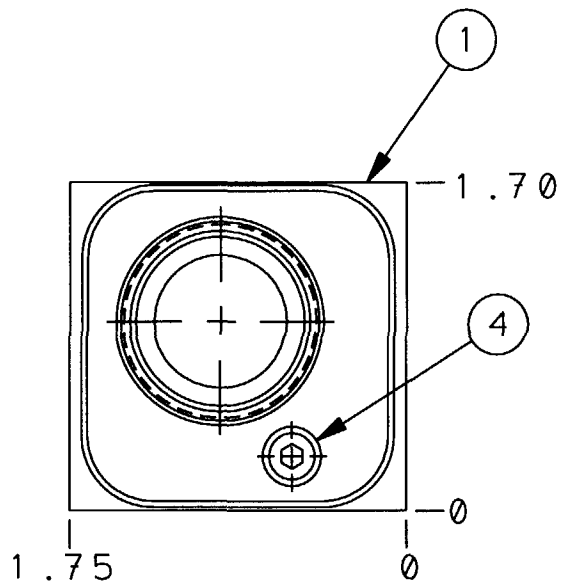

T-5A CAVITY
.03 L.S.DEPH
TYP (2) PLACES

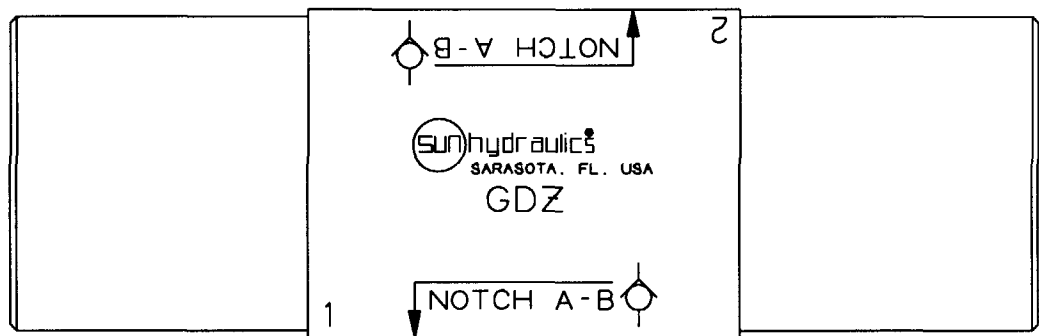

.20 DIA. MOUNTING HOLES
TYP (4) PLACES

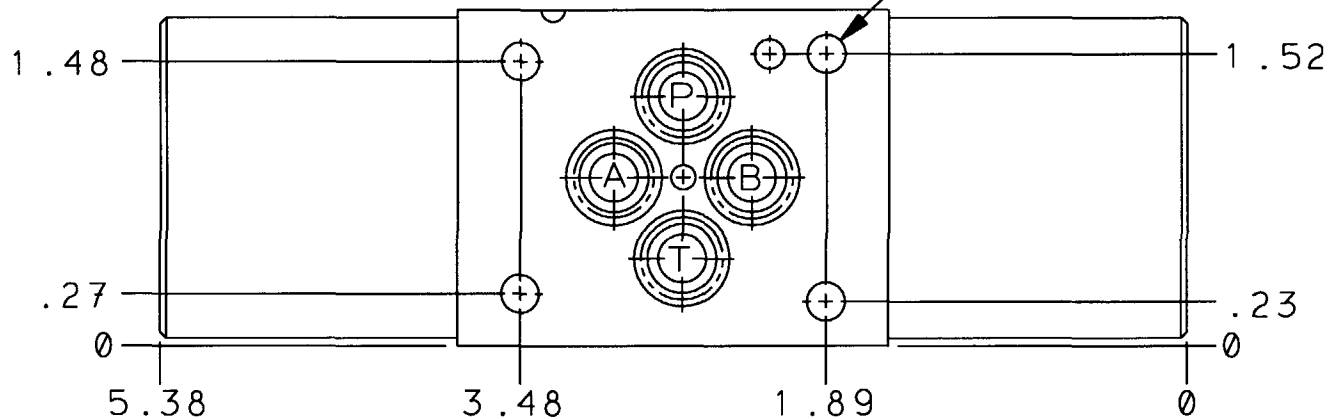

NOTES :

- 1)SEALS:BUNA-N
- 2)ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- *3)CUSTOMER TO INSTALL LOCATING
PIN (ITEM 5) FOR FUNCTIONAL
ORIENTATION DESIRED.
- 4)ORDERING INFO:
CXFA *** GDZ

CARTRIDGE TO BE INSTALLED
IN T-5A CAVITY

ITEM	PART NO.	PART NAME	QTY
5	811-001-006	PIN	1
4	340-001	PIPE PLUG	2
3	500-001-012	"O"RING	4
2	700-002	SEAL PLATE	1
1	151-612	BODY	1

REVISION	DATE	DRN	CHK	REL
A	23 SEP93	BRS		5023
LET				

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x ±.030
.xx ±.015
.xxx ±.005
ANGLE TOL ±1/2
FINISH 80✓
REMOVE ALL BURRS

OUTLINE & ASSEMBLY

TITLE	SCALE	REF.	MATERIAL
ISO 03 SANDWICH-DUAL T-5A CAVITIES-CHECK ON A & B	1/1	GBZ	ALUMINUM
DRAWN BRS	CHECK JLB	RELEASE 4976	HEAT TREAT & FINISH
DATE 02 SEP93	DATE 02 SEP93	DATE 02 SEP93	

REVISION	PART NO.
A	GDZ

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983