



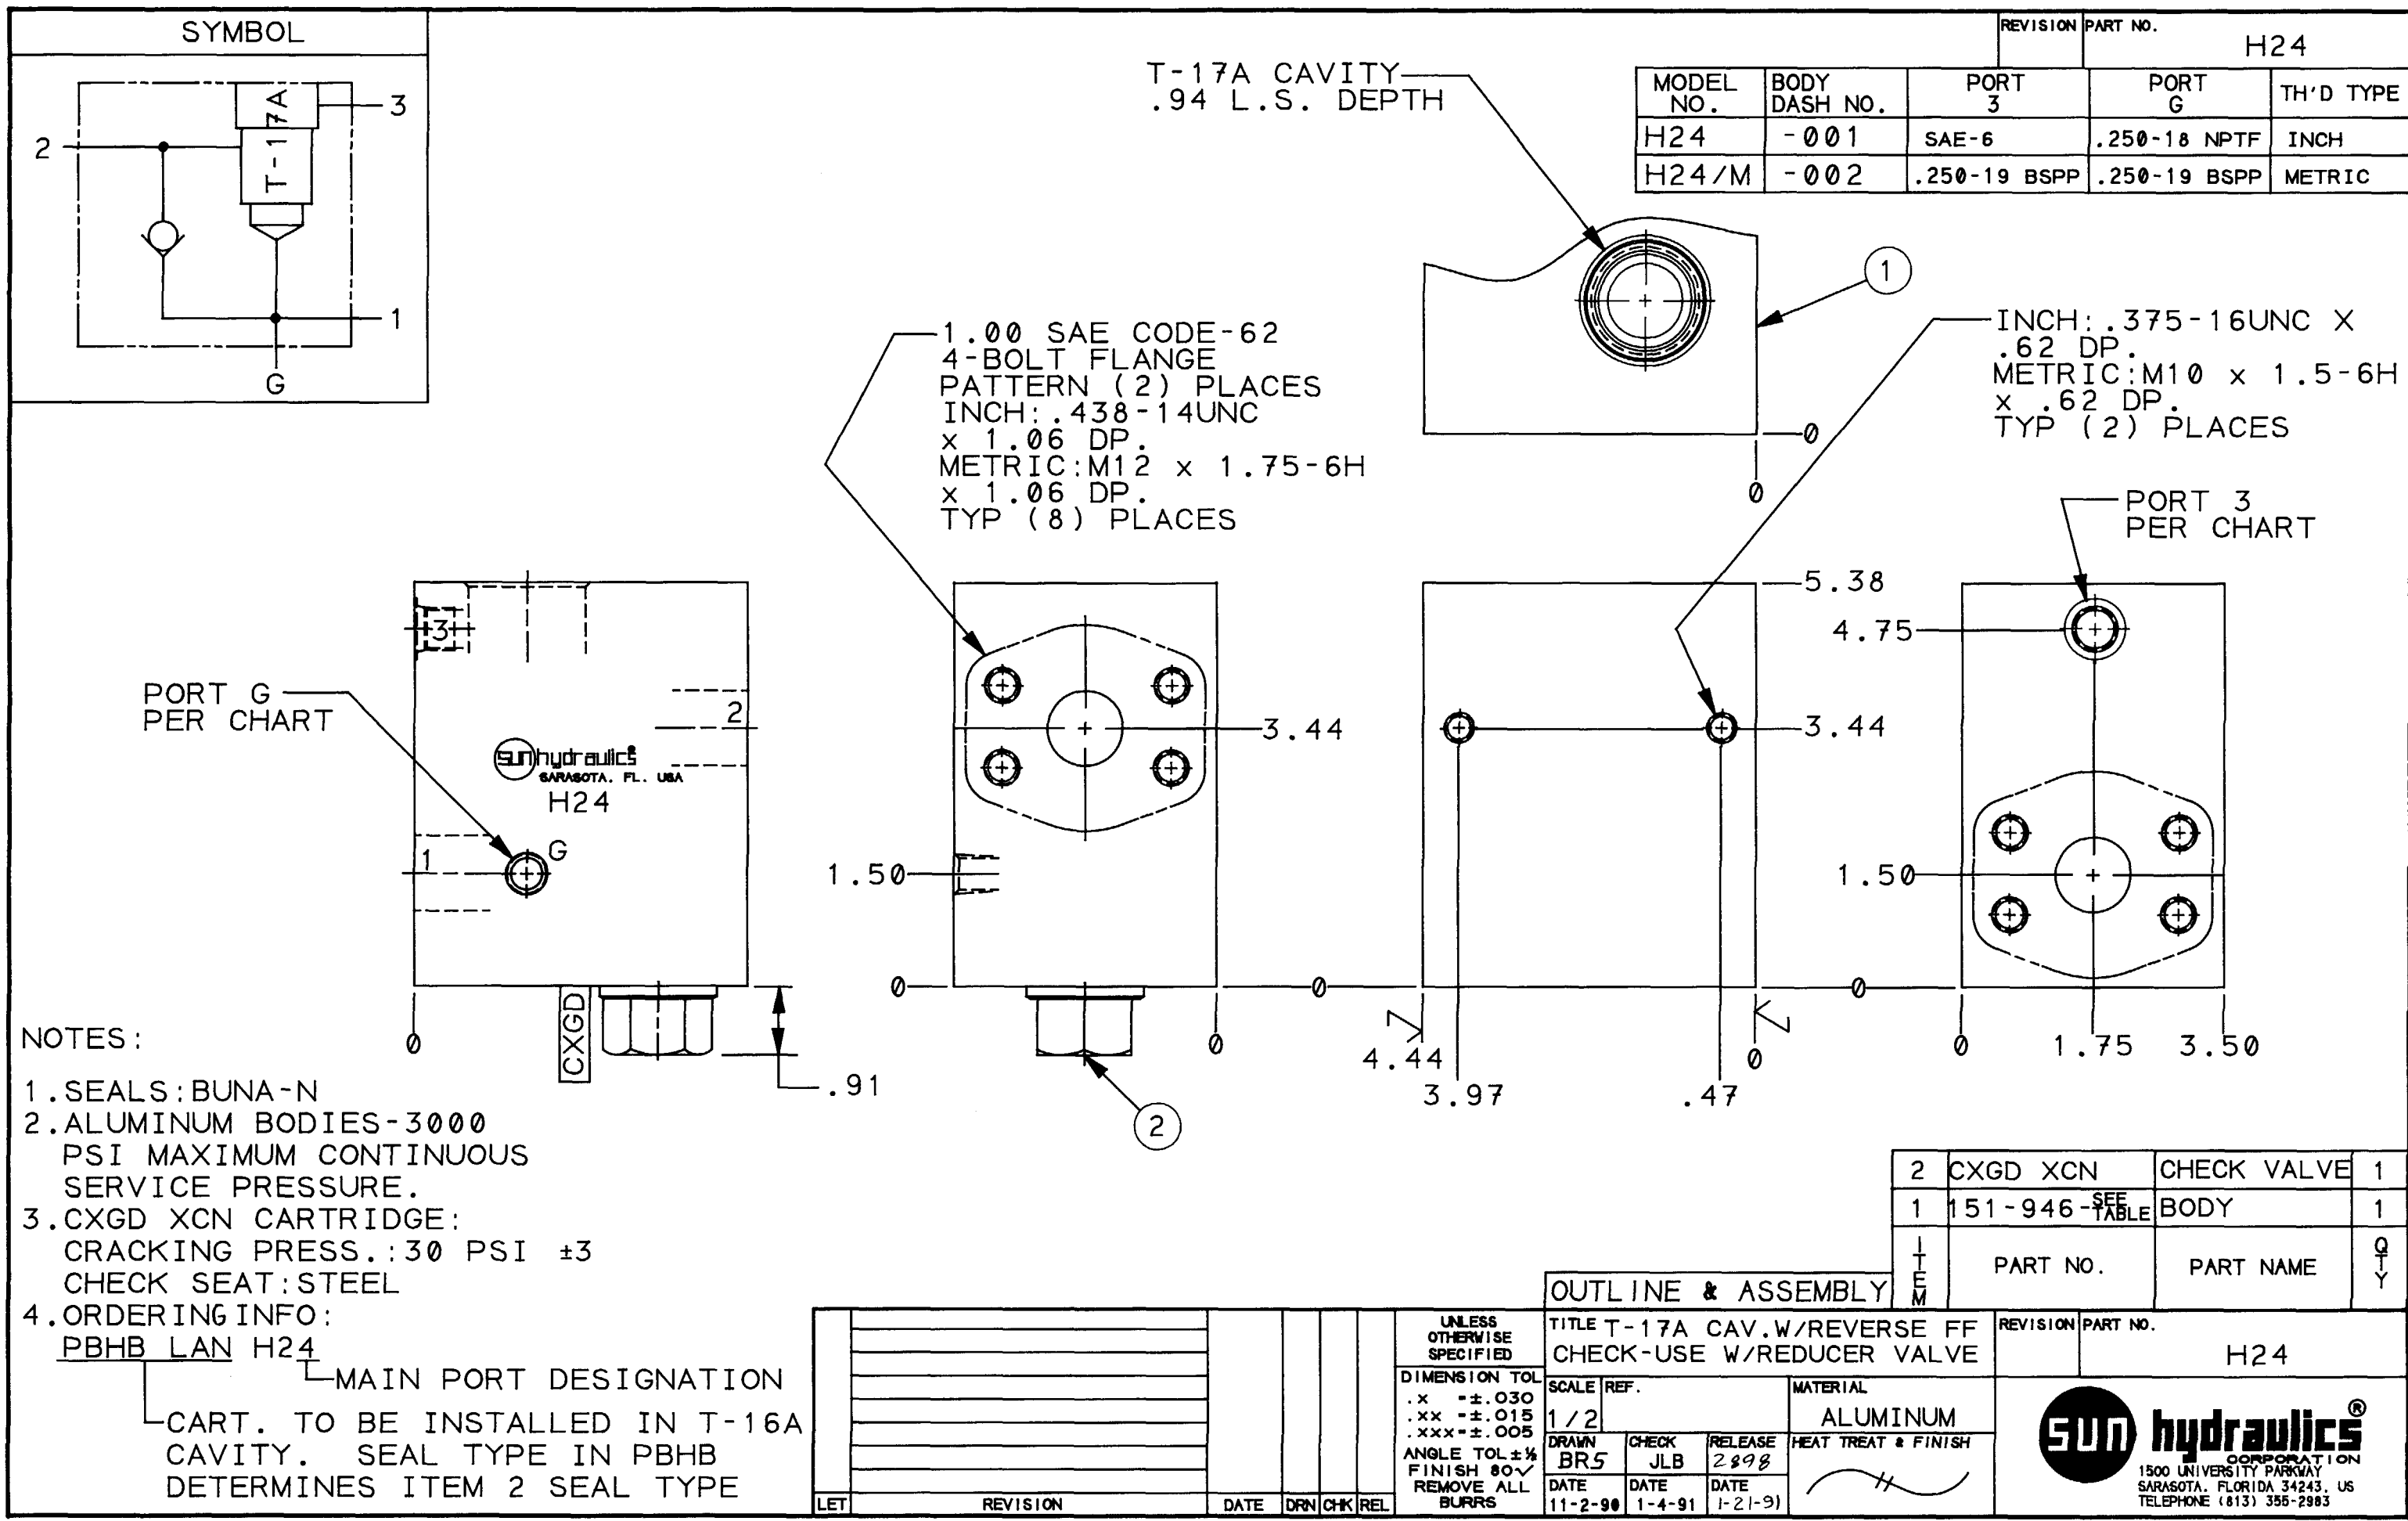

SYMBOL

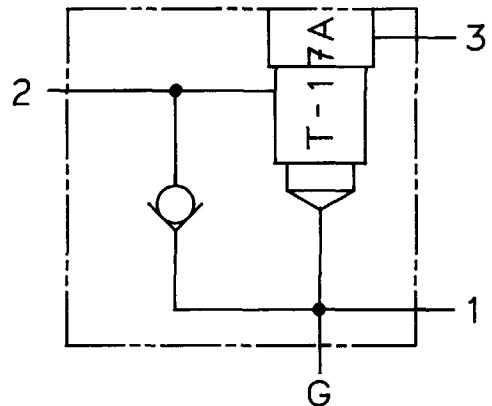

REVISION	PART NO.
	H24

MODEL NO.	BODY DASH NO.	PORT 3	PORT G	TH'D TYPE
H24	-001	SAE-6	.250-18 NPTF	INCH
H24/M	-002	.250-19 BSPP	.250-19 BSPP	METRIC

T-17A CAVITY
.94 L.S. DEPTH

1.00 SAE CODE-62
4-BOLT FLANGE
PATTERN (2) PLACES
INCH: .438-14UNC
x 1.06 DP.
METRIC: M12 x 1.75-6H
x 1.06 DP.
TYP (8) PLACES

INCH: .375-16UNC X
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

PORT 3
PER CHART

PORT G
PER CHART

- NOTES:
- 1. SEALS: BUNA-N
 - 2. ALUMINUM BODIES-3000
PSI MAXIMUM CONTINUOUS
SERVICE PRESSURE.
 - 3. CXGD XCN CARTRIDGE:
CRACKING PRESS.: 30 PSI ±3
CHECK SEAT: STEEL
 - 4. ORDERING INFO:
PBHB LAN H24
- MAIN PORT DESIGNATION
CART. TO BE INSTALLED IN T-16A
CAVITY. SEAL TYPE IN PBHB
DETERMINES ITEM 2 SEAL TYPE

ITEM	PART NO.	PART NAME	QTY
2	CXGD XCN	CHECK VALVE	1
1	151-946-SEE TABLE	BODY	1

OUTLINE & ASSEMBLY

LET	REVISION	DATE	DRN	CHK	REL	UNLESS OTHERWISE SPECIFIED	TITLE	REVISION	PART NO.
						DIMENSION TOL .x = ±.030 .xx = ±.015 .xxx = ±.005 ANGLE TOL ±1/2° FINISH 80V REMOVE ALL BURRS	TITLE T-17A CAV. W/REVERSE FF CHECK-USE W/REDUCER VALVE		H24
						SCALE REF. 1/2	MATERIAL ALUMINUM		
						DRAWN BR5	CHECK JLB	RELEASE 2898	
						DATE 11-2-90	DATE 1-4-91	DATE 1-21-91	
							HEAT TREAT & FINISH		

