


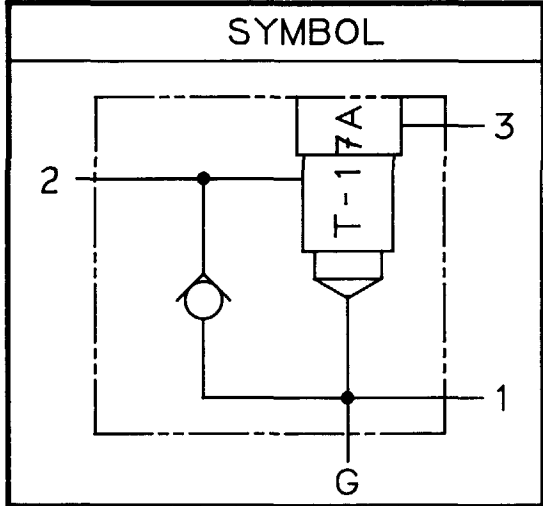

T-17A CAVITY
.94 L.S. DEPTH

MODEL NO.	BODY DASH NO.	PORT 3	PORT G	TH'D TYPE
H64	-001	SAE-6	.250-18 NPTF	INCH
H64/M	-002	.250-19 BSPP	.250-19 BSPP	METRIC

INCH: .375-16UNC X
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

1.00 SAE CODE-62
4-BOLT FLANGE
PATTERN (2) PLACES
INCH: .438-14UNC
x 1.06 DP.
METRIC: M12 x 1.75-6H
x 1.06 DP.
TYP (8) PLACES

PORT G
PER CHART


PORT 3
PER CHART

NOTES:

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000
PSI MAXIMUM CONTINUOUS
SERVICE PRESSURE.
3. CXHA XCN CARTRIDGE:
CRACKING PRESS.: 30 PSI ±3
CHECK SEAT: STEEL
4. ORDERING INFO:
RSHC LAN H64

MAIN PORT DESIGNATION

CART. TO BE INSTALLED IN T-16A
CAVITY. SEAL TYPE IN RSHC
DETERMINES ITEM 2 SEAL TYPE

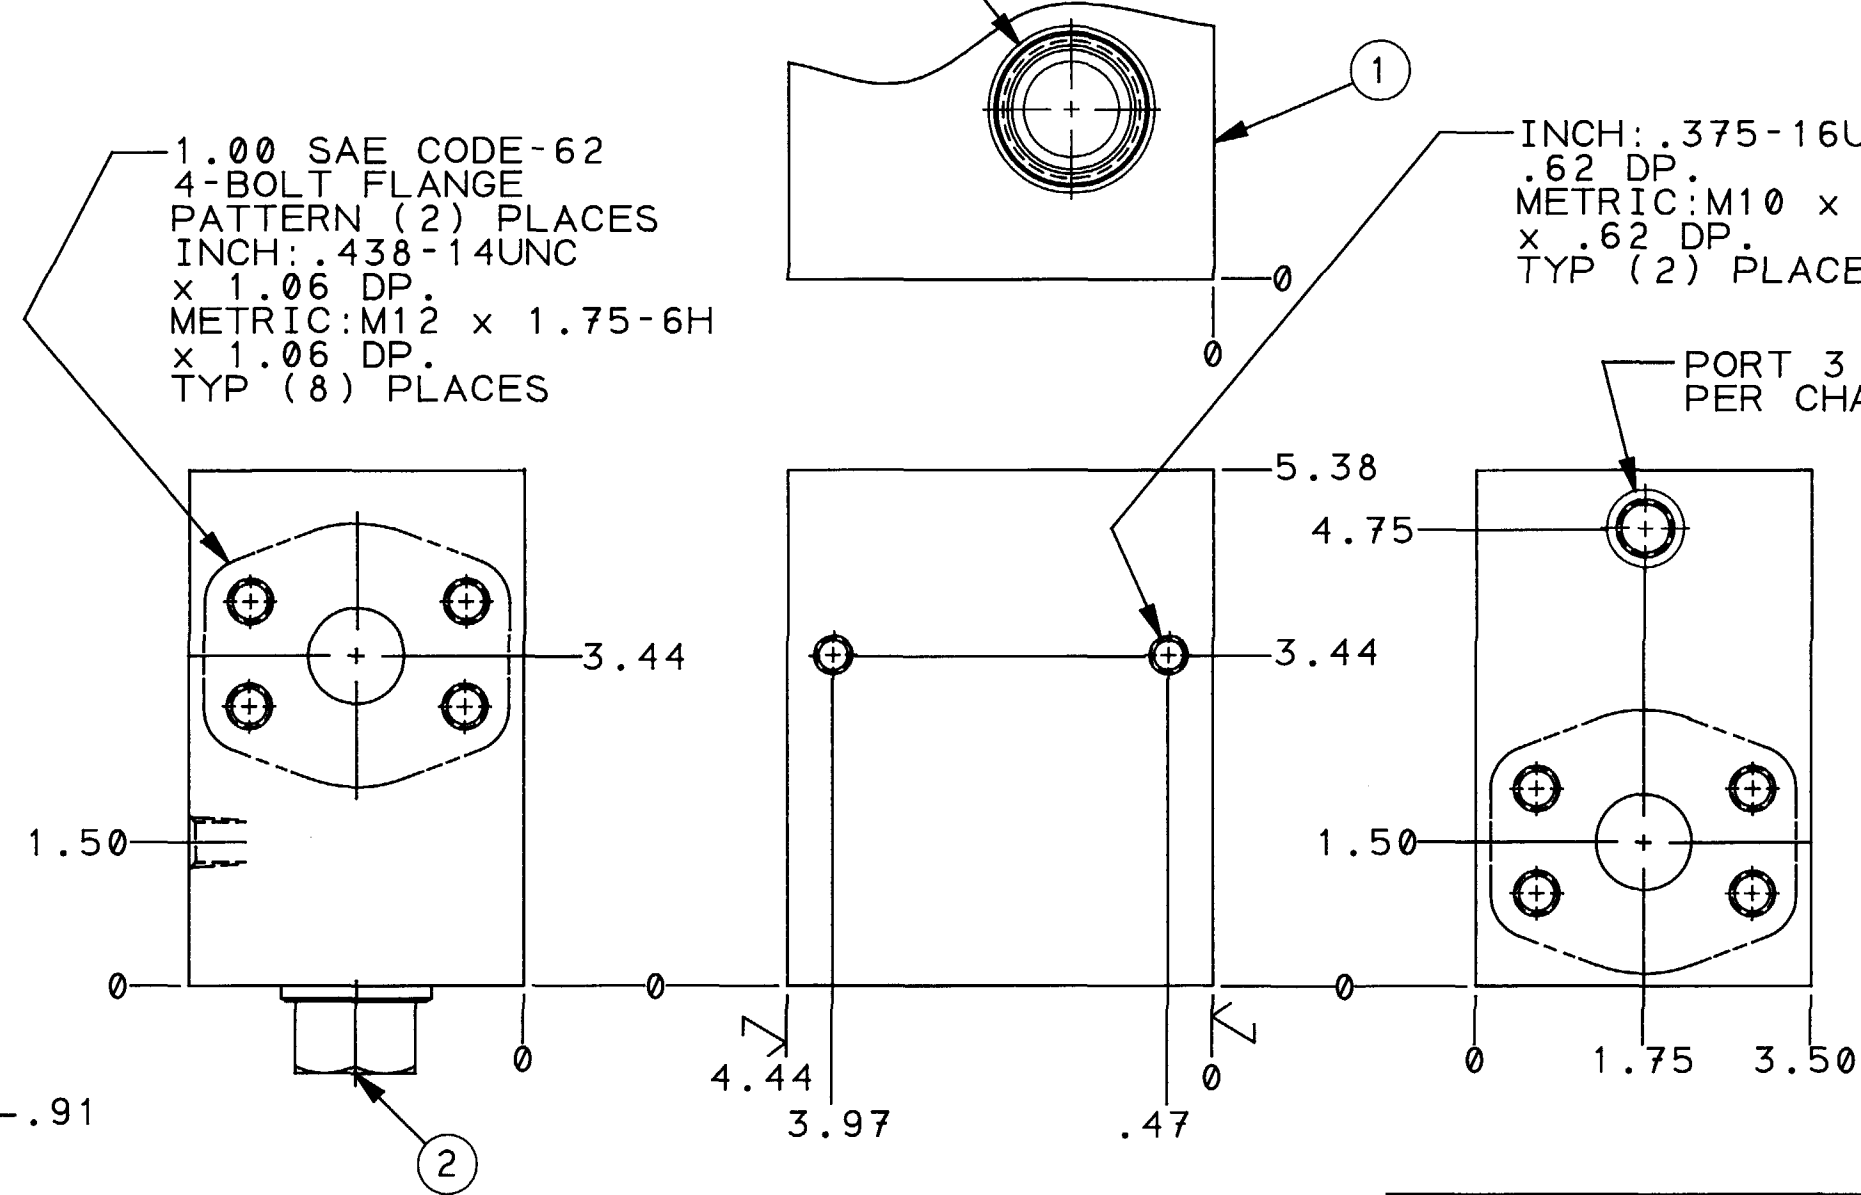

2	CXHA XCN	CHECK VALVE	1
1	151-946-SEE TABLE	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY

TITLE T-17A CAV.W/REVERSE FF CHECK-USE W/SEQUENCE VALVE				REVISION	PART NO.
H64					
UNLESS OTHERWISE SPECIFIED		SCALE REF.		MATERIAL	
DIMENSION TOL		1 / 2		ALUMINUM	
.x ±.030		DRAWN		HEAT TREAT & FINISH	
.xx ±.015		BR5			
.xxx ±.005		CHECK			
ANGLE TOL ±%		JLB			
FINISH 80✓		RELEASE			
REMOVE ALL BURRS		2898			
DATE		DATE		DATE	
11-2-90		1-4-91		1-22-91	
LET	REVISION	DATE	DRN	CHK	REL

