SYMBOL




| REVISION | PART NO. H65 |
|---|---|

| MODEL NO. | BODY DASH NO. | PORT 3 | PORT G | TH'D TYPE |
|---|---|---|---|---|
| H65 | -001 | SAE-6 | .250-18 NPTF | INCH |
| H65/M | -002 | .250-19 BSPP | .250-19 BSPP | METRIC |

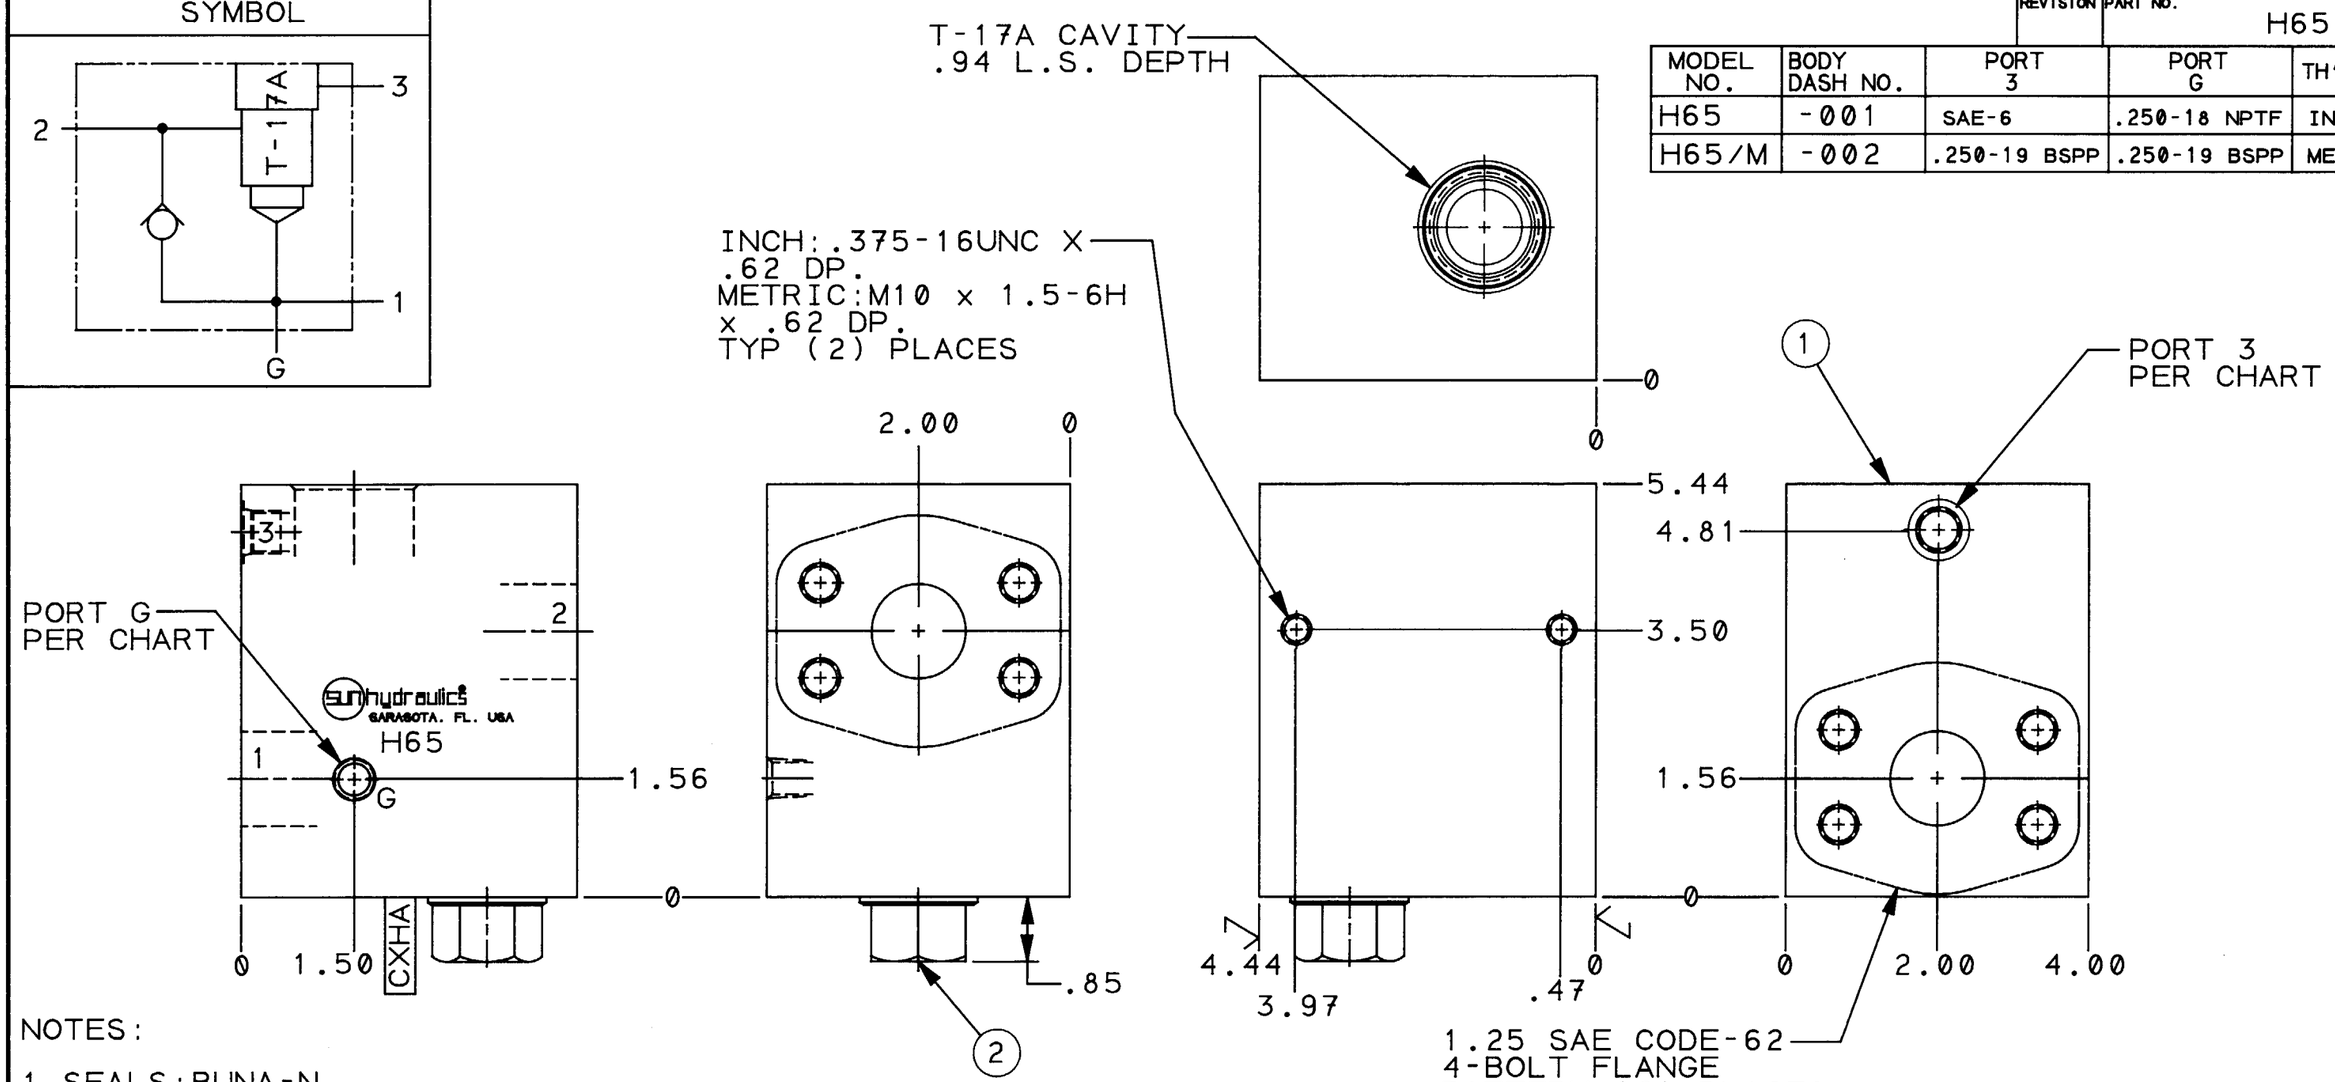


NOTES:

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
3. CXHA XCN CARTRIDGE:
   CRACKING PRESS.: 30 PSI ±3
   CHECK SEAT: STEEL
4. ORDERING INFO:
   RSHC LAN H65
   - H65 — MAIN PORT DESIGNATION
   - LAN — CART. TO BE INSTALLED IN T-16A CAVITY. SEAL TYPE IN PBHB DETERMINES ITEM 2 SEAL TYPE

1.25 SAE CODE-62
4-BOLT FLANGE
PATTERN (2) PLACES
INCH: .500-13UNC
x 1.00 DP.
METRIC: M14 x 2.0-6H
x 1.00 DP.
TYP (8) PLACES

| ITEM | PART NO. | PART NAME | QTY |
|---|---|---|---|
| 2 | CXHA XCN | CHECK VALVE | 1 |
| 1 | 151-947-SEE TABLE | BODY | 1 |

OUTLINE & ASSEMBLY

| LET | REVISION | DATE | DRN | CHK | REL |
|---|---|---|---|---|---|
| | | | | | |

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 80√
REMOVE ALL BURRS

TITLE T-17A CAV. W/REVERSE FF CHK-USE WITH SEQUENCE VALVE

| REVISION | PART NO. |
|---|---|
| | H65 |

| SCALE | REF. | | MATERIAL |
|---|---|---|---|
| 1/2 | | | ALUMINUM |
| DRAWN | CHECK | RELEASE | HEAT TREAT & FINISH |
| BRS | JLB | 2898 | |
| DATE 11-2-90 | DATE 1-4-91 | DATE 1-22-91 | |


sun hydraulics® CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, US
TELEPHONE (813) 355-2983