

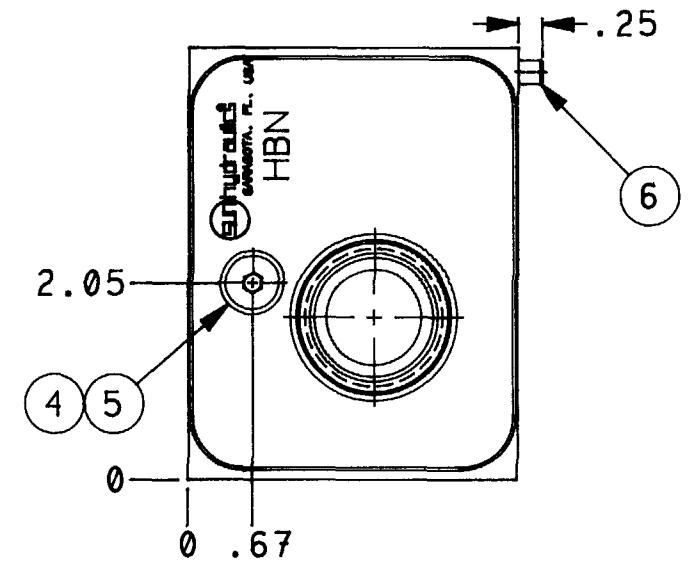


T-17A CAVITY
.91 L.S. DEPTH
TYP BOTH ENDS

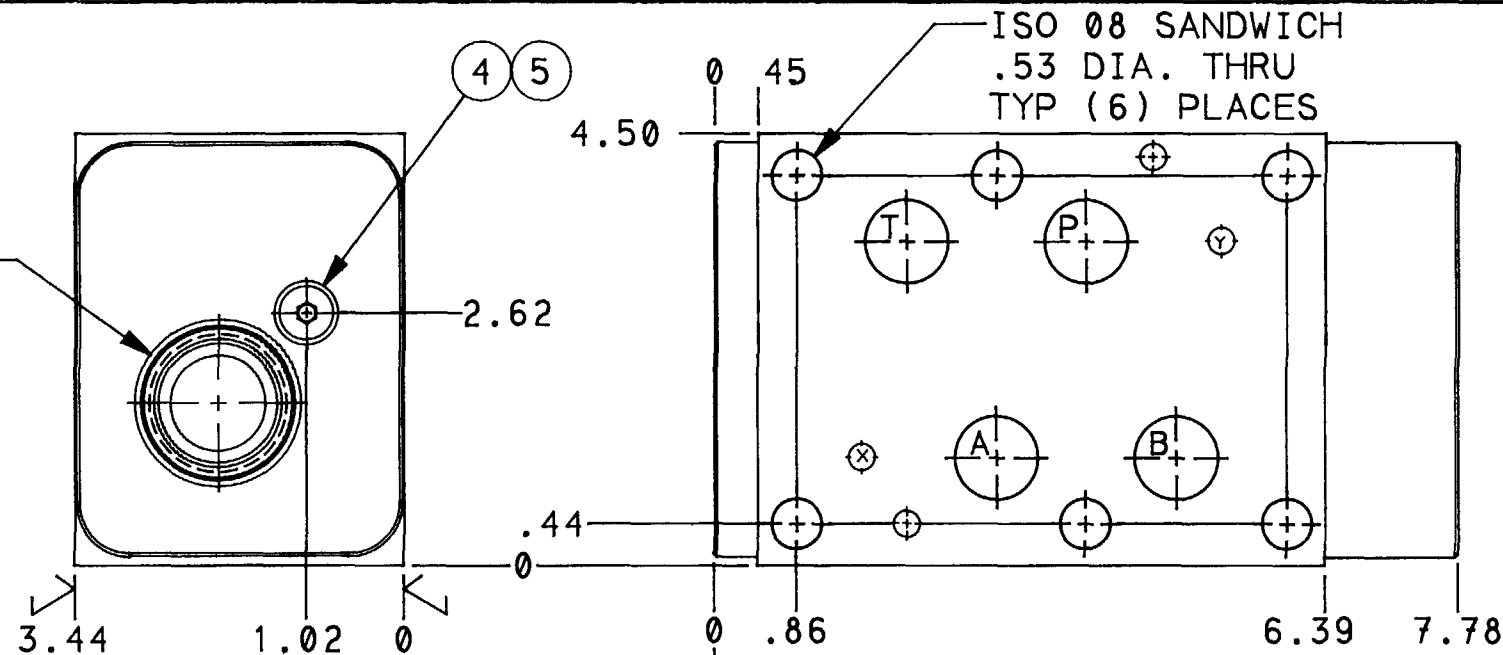


NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.

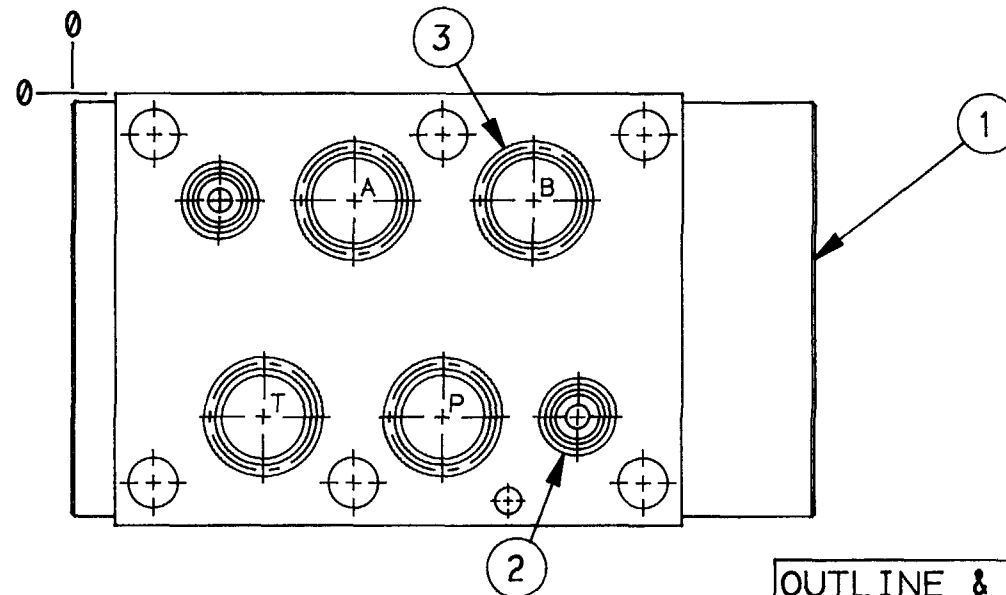

SYMBOL

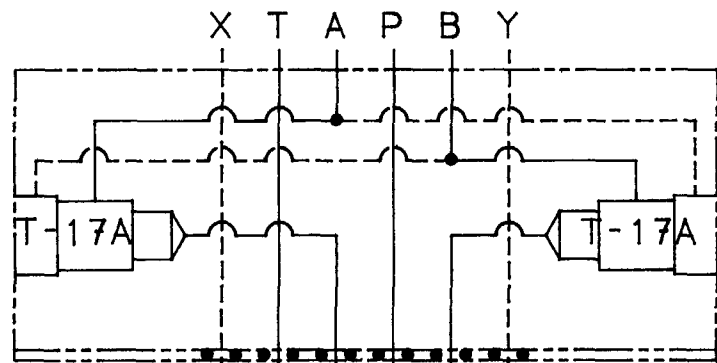

ITEM	PART NO.	PART NAME	QTY
6	811-001-002	ROLL PIN	1
5	330-006-004	PLUG	2
4	500-002-904	"O"RING	2
3	500-001-121	"O"RING	4
2	500-001-114	"O"RING	2
1	152-699	BODY	1

OUTLINE & ASSEMBLY

								UNLESS OTHERWISE SPECIFIED		TITLE ISO 08 DUAL CROSS-PORTED T-17A CAVITIES			REVISION		PART NO.	
															HBN	
										DIMENSION TOL			SCALE REF.		MATERIAL	
										.x = ±.030			1 / 2		ALUMINUM	
										.xx = ±.015					& NOTED	
										.xxx = ±.005					HEAT TREAT & FINISH	
										ANGLE TOL ± 1/2			DRAWN		CHECK	
										FINISH 80-100			BRS		DAS	
										REMOVE ALL BURRS			RELEASE		3273	
													DATE		DATE	
													9-6-91		9-9-91	
															9-11-91	
- REVERSED X & Y DESIGNATIONS		2-24-92		BRS												
LET REVISION		DATE		DRN		CHK		REL								



SUN hydraulics[®]
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983

