
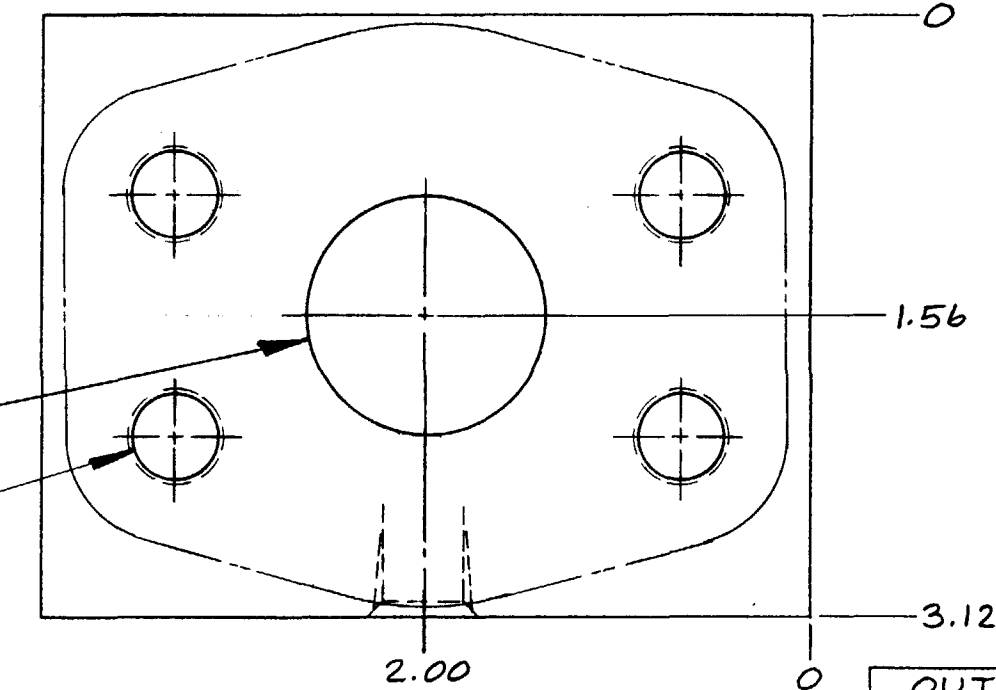
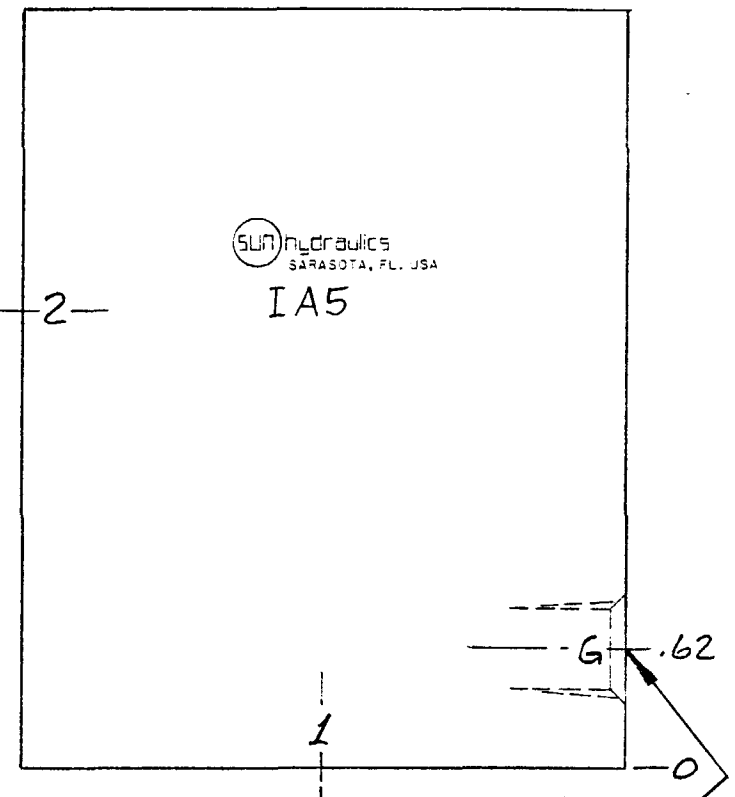
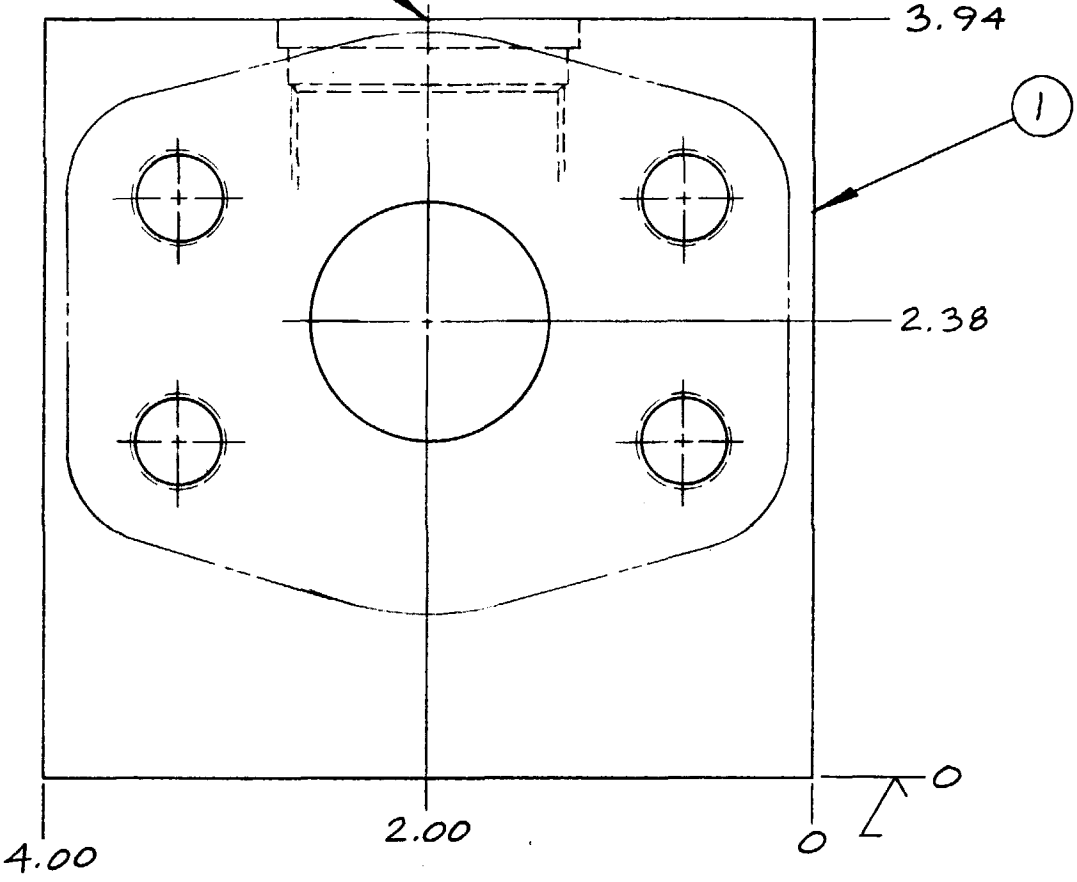


T-16A CAVITY
.156 L.S. DEPTH

REVISION B PART NO. IA5

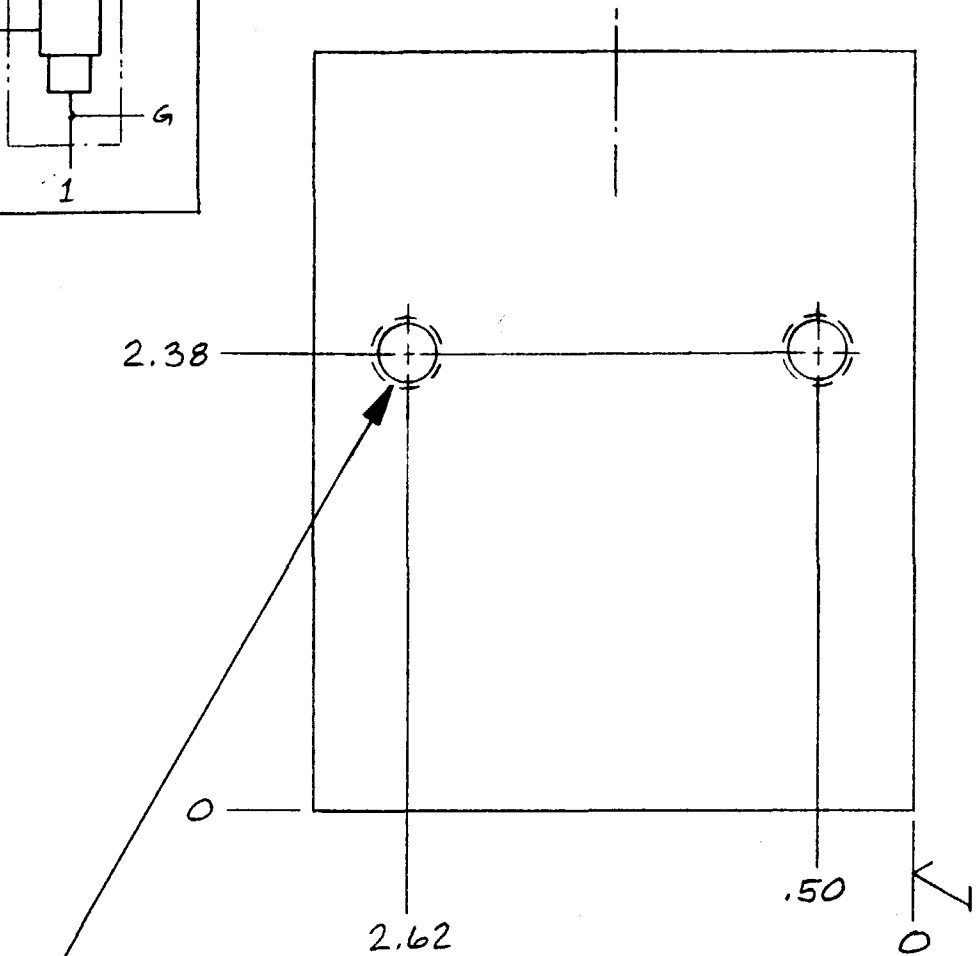

INCH: .375-16 UNC x .62 DP.
METRIC: M10 x 1.5-6H x .62 DP.
TYP. (2) PLACES

SAE 1.25 DIA. CODE-62
4-BOLT FLANGE PATTERN
TYP. (2) PLACES

INCH: .500-13 UNC x 1.00 DP.
METRIC: M14 x 2.0-6H x 1.00 DP.
TYP. (8) PLACES

NOTE:
1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
2) FOR OTHER OPTIONS
SEE OPTION SHEET.

1	151-740-***	BODY	1
ITEM	PART NO.	PART NAME	QTY

MODEL NO	BODY DASH NO	GAGE PORT	TH'D TYPE
IA5	-001	.250-18 NPTF	INCH
IA5/M	-002	.250-19 BSPP	METRIC

LET.	REVISION	DATE	DRN	CHK	REL
B	ADDED CHART	1-8-90	DA5		2574
A	MATERIAL WAS STEEL, .375-16 MTG. HOLES WERE .500-13 IA5 WAS IA5/S, ADDED ALUM. NOTE, BODY NO. WAS 161-739	6-30-89	BRS		2138

UNLESS OTHERWISE SPECIFIED		TITLE BODY-1.25 CODE-62 LINE MTD. T-16A CAVITY	
DIMENSION TOL .X = ±.030 .XX = ±.015 .XXX = ±.005		SCALE 1:1	REF.
ANGLE TOL ± 1/2° FINISH 80V REMOVE ALL BURRS		DRAWN DA5	CHECK R/B
		DATE 1-21-88	DATE 1-28-88
		RELEASE	DATE

REVISION B	PART NO. IA5
MATERIAL ALUMINUM	
HEAT TREAT & FINISH	
sun hydraulics CORPORATION	
1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, U.S.A. TELEPHONE (813) 355-2963	