







SYMBOL

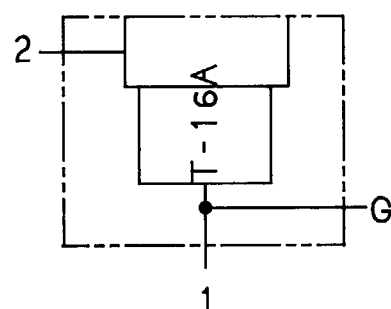

T-16A CAVITY
.03 L.S. DEPTH

MOUNTING PROVISIONS
INCH: .375-16UNC x
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

REVISION	PART NO.	IAQ	
A			
MODEL NO.	BODY DASH NO.	TH'D TYPE	GAGE PORT
IAQ	001	INCH	1/4 NPTF
IAQ/M	002	METRIC	1/4 BSPP

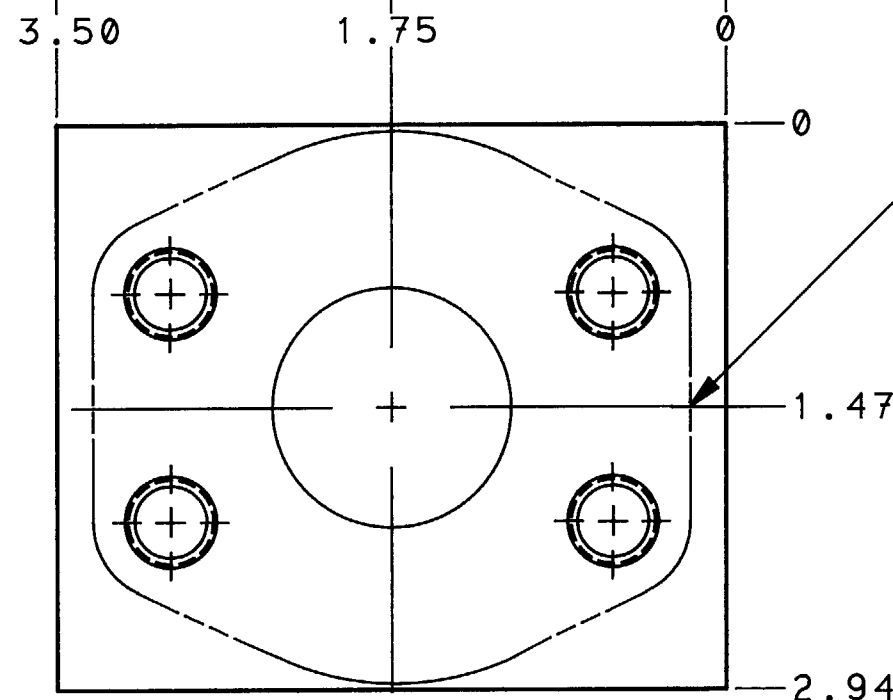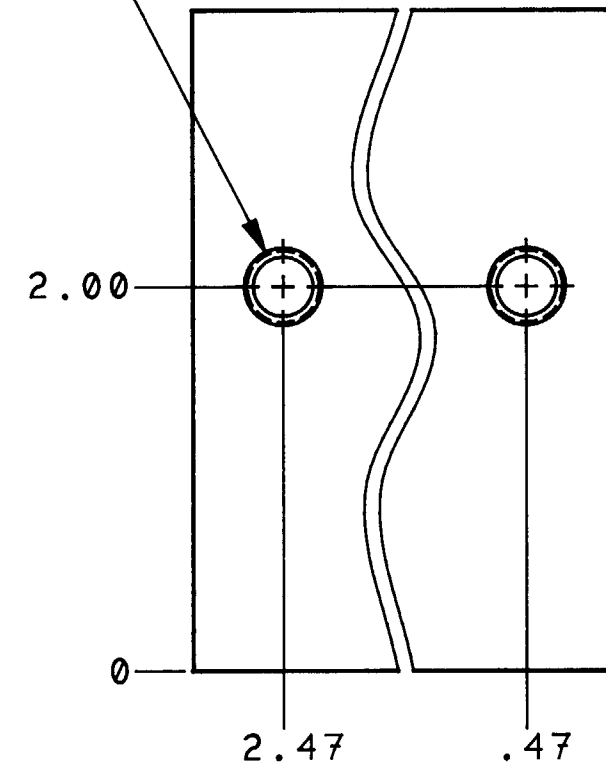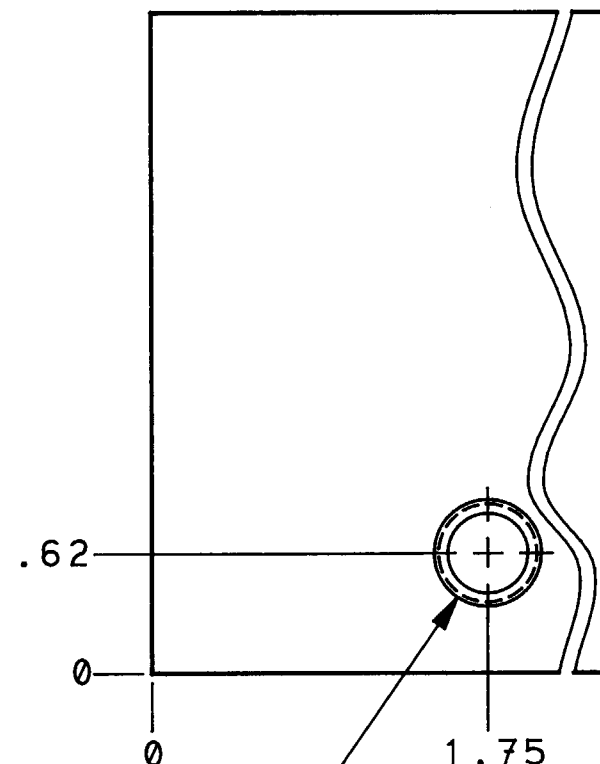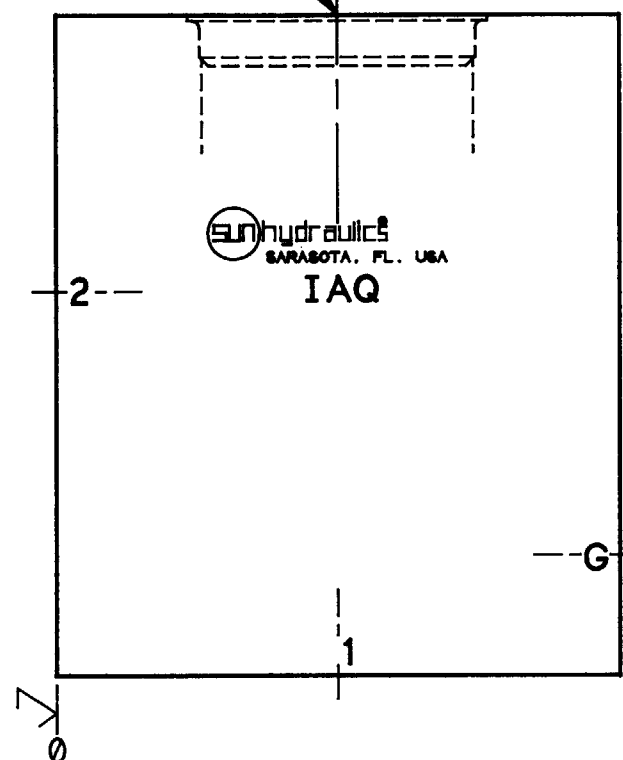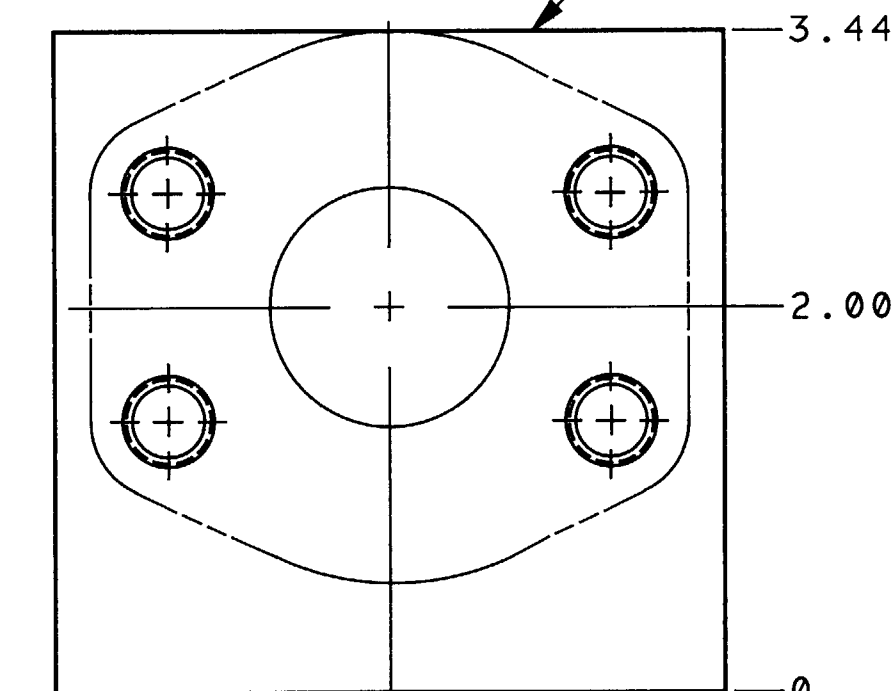

1.25 SAE CODE-61
4-BOLT FLANGE
PATTERN (2) PLACES
INCH: .438-14UNC x
1.12 DP.
METRIC: M10 x 1.5-6H
x 1.12 DP.
TYP (8) PLACES

PORT G
PER CHART

NOTES:

- 1) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
- 2) FOR OTHER OPTIONS SEE OPTION SHEET.

1	150-730-SEE TABLE	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE DRAWING

TITLE				REVISION	PART NO.
IN LINE BODY T-16A CAV. 1.25 SAE CODE-61 FLANGE				A	IAQ
UNLESS OTHERWISE SPECIFIED				MATERIAL	
DIMENSION TOL				ALUMINUM BODY	
.x = ±.030				HEAT TREAT & FINISH	
.xx = ±.015				X	
.xxx = ±.005					
ANGLE TOL ±%					
FINISH 80✓					
REMOVE ALL BURRS					
A REDRAWN AS A SEPARATE DWG.					
LET REVISION					
7-9-90					
BRS DAS					
2652					
DATE					
DRN CHK REL					
7/6/90					
7/9/90					
DATE					

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983