


SYMBOL

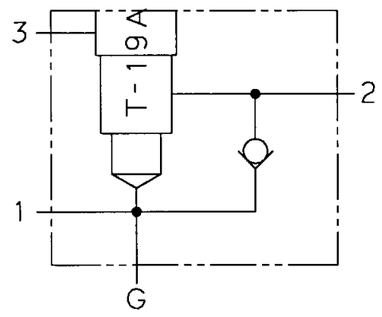


REVISION	PART NO.
	K2Q

MODEL NO.	BODY DASH NO.	PORT 3	PORT G	TH'D TYPE
K2Q	-001	SAE-6	.250-18 NPTF	INCH
K2Q/M	-002	.250-19 BSPP	.250-19 BSPP	METRIC

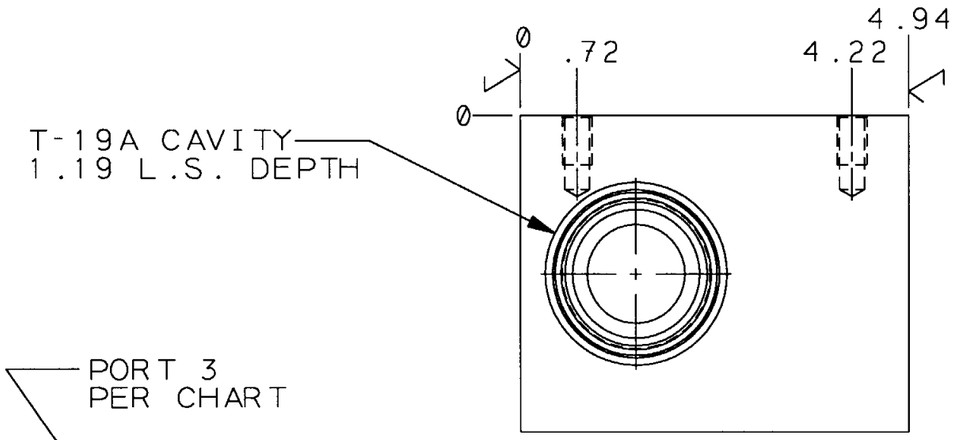

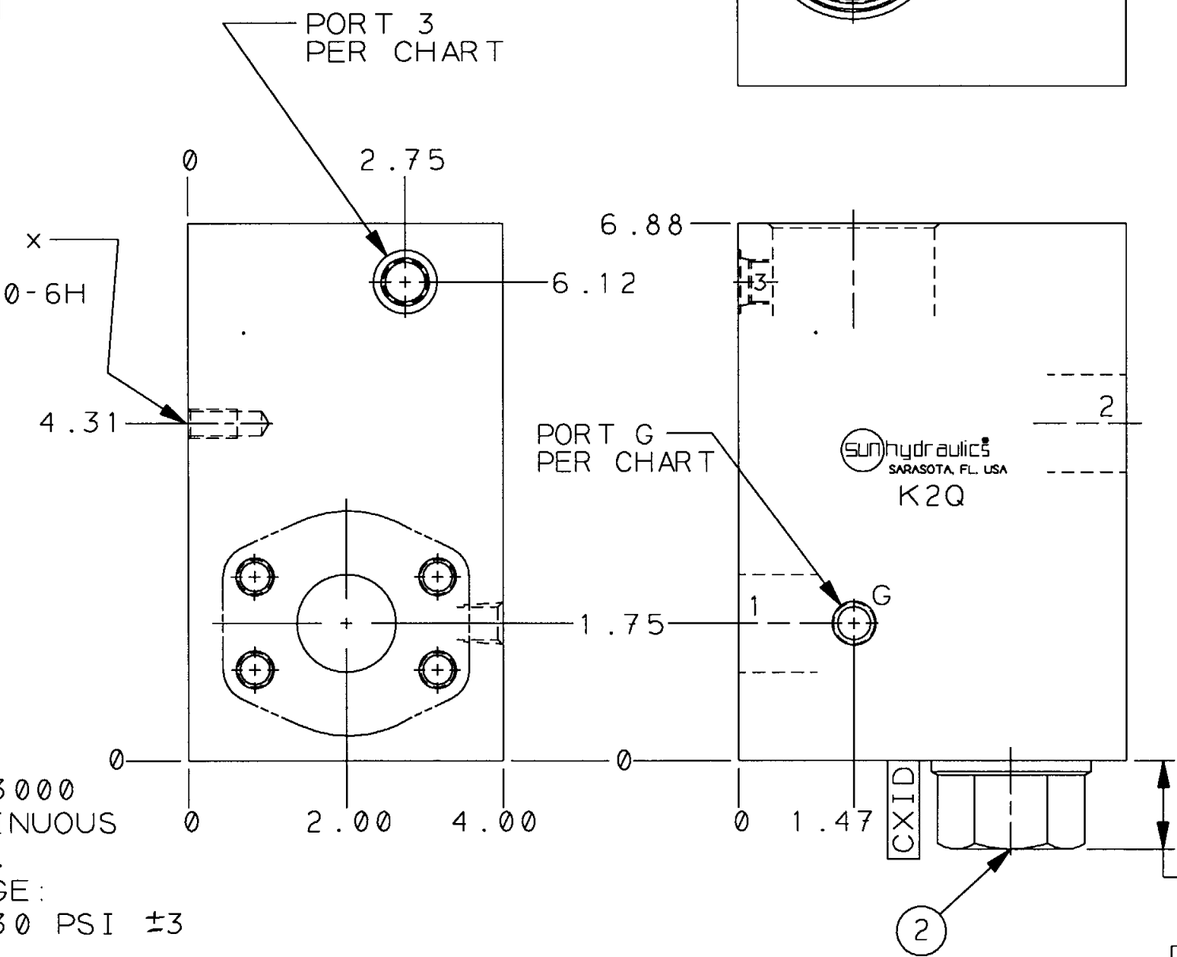

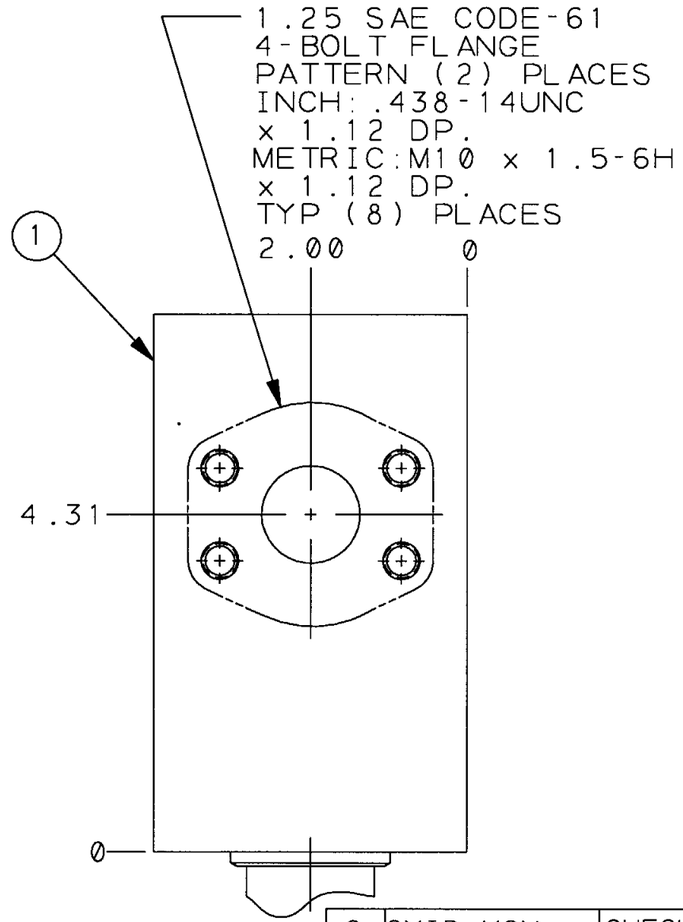

NOTES:

1. SEALS: BUNA-N
2. ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
3. CXID XCN CARTRIDGE:
   CRACKING PRESS.: 30 PSI ±3
   CHECK SEAT: STEEL
4. ORDERING INFO:
   PBJB LAN K2Q
   - K2Q — MAIN PORT DESIGNATION
   - LAN — CART. TO BE INSTALLED IN T-19A CAVITY. SEAL TYPE IN PBJB DETERMINES ITEM 2 SEAL TYPE

ITEM	PART NO.	PART NAME	QTY
2	CXID XCN	CHECK VALVE	1
1	151-930-SEE TABLE	BODY	1

OUTLINE & ASSEMBLY

LET	REVISION	DATE	DRN	CHK	REL
-	NOTE 4-T-19A WAS T-18A.	30JUN97	BRS		

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ± ½
FINISH 80√
REMOVE ALL BURRS

TITLE T-19A CAV. W/REVERSE FF USE W/REDUCER VALVE

SCALE	REF.	MATERIAL
1/2		ALUMINUM

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
BRS	JLB		
DATE 11-7-90	DATE 12-28-90	DATE	

REVISION	PART NO.
	K2Q

sun hydraulics® CORPORATION
1500 WEST UNIVERSITY PKWY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1200