


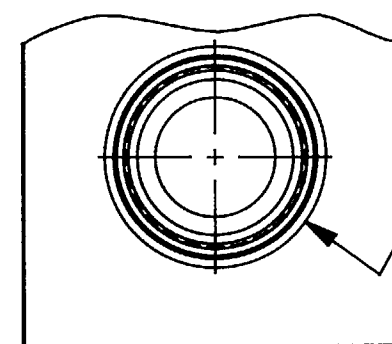

- 1.50 SAE CODE-62
4-BOLT FLANGE
PATTERN (3) PLACES
INCH: .625-11 UNC x 1.38 DP.
METRIC: M16 x 2.0-6H x 1.38 DP.
TYP (12) PLACES

A diagram of a four-armed cross. At the center is a circle with a plus sign (+). Four lines extend from this central circle to the corners of a square frame. At the end of each line is another circle, also containing a plus sign (+). An arrow points to the bottom circle.

- .75

2.25

0

2

0.47

3.47

- 6.12

-2.44

—0

Q

2.25

4.50

2.25.

1.97

3.94

- MOUNTING PROVISIONS
INCH: .375-16UNC x .62 DP.
METRIC: M10 x 1.5-6H x .62 DP.
TYP. (2) PLACES.

1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
2) FOR OTHER OPTIONS
SEE OPTION SHEET.

OUTLINE DRAWING

						UNLESS OTHERWISE SPECIFIED	TITLE IN LINE BODY T-19A CAV. 1.50 SAE CODE-62 FLANGE			REVISION	PART NO. KE6
						DIMENSION TOL	SCALE	REF.	MATERIAL ALUMINUM BODY		
						.X = ±.030	1/2				
						.XX = ±.015	DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH	
						.XXX = ±.005	BR5	DAS	2575		
						ANGLE TOL ±½ FINISH 60✓ REMOVE ALL BURRS	DATE 5/3/90	DATE 5/15/90	DATE 5-21-90		
LET	REVISION	DATE	DRN	CHK	REL					 SUN hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2903	