


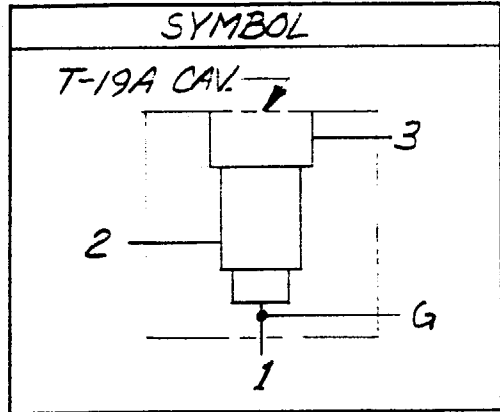



.42 DIA. THRU MTG. HOLES.
TYP. (2) PLACES.

T-19A CAVITY.
L.S. DEPTH-1.156

PORT #3,

PORT #2, PER CHART.

PORT #1, PER CHART.

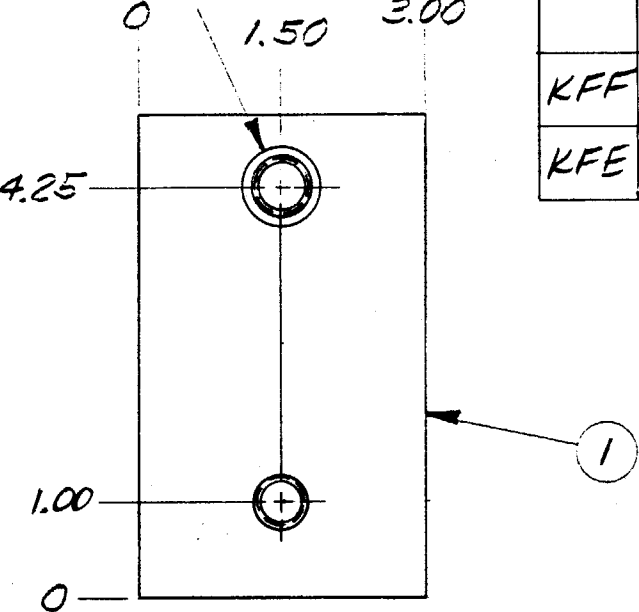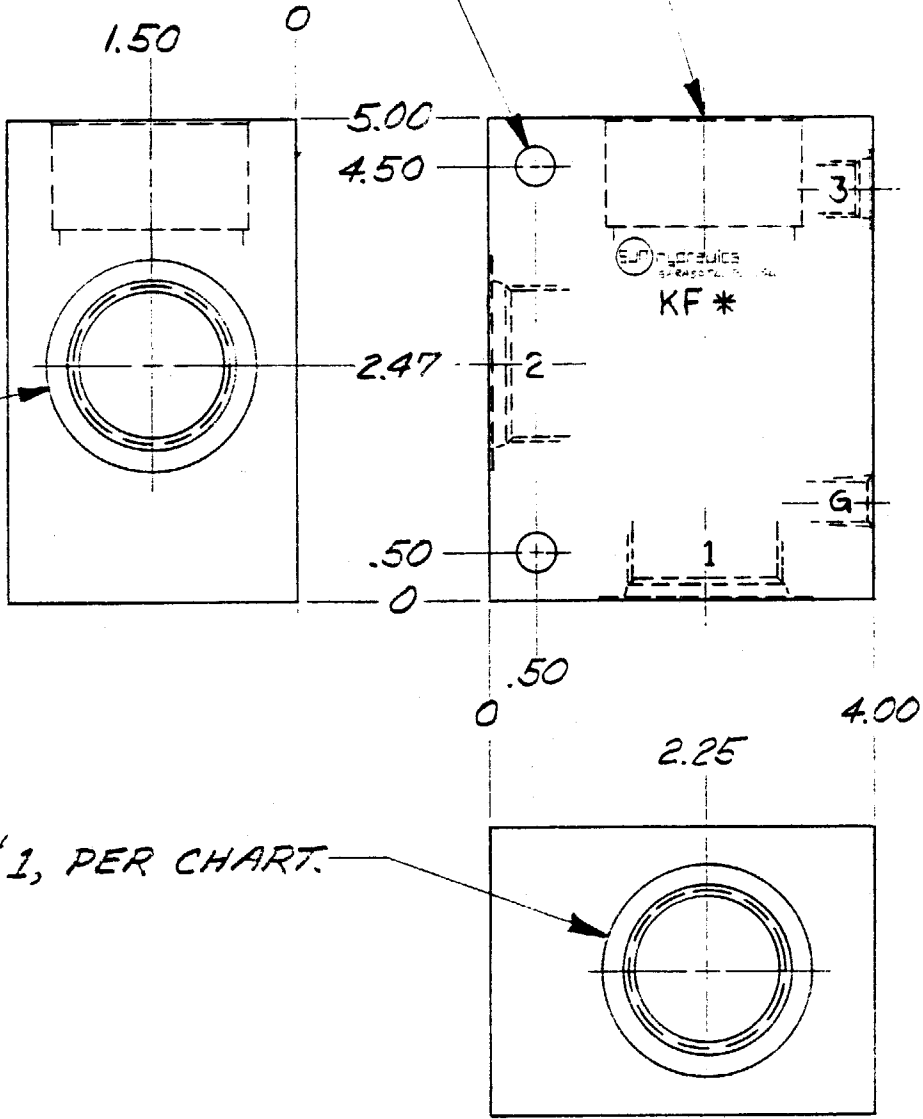

				REVISION	PART NO. KF*	
MODEL NO.	BODY DASH NO.	PORT G	PORT #1	PORT #2	PORT #3	
KFY	-007	.250-19 BSPP	1.250-11 BSPP	1.250-11 BSPP	.250-19 BSPP	
KFX	-006	.250-19 BSPP	1.000-11 BSPP	1.000-11 BSPP	.250-19 BSPP	
KFN	-005	.250-18 NPTF	SAE -20	SAE -20	SAE -6	
KFM	-004	.250-18 NPTF	SAE -16	SAE -16	SAE -6	
KFF	-002	.250-18 NPTF	1.250-11.5 NPTF	1.250-11.5 NPTF	.250-16 NPTF	
KFE	-001	.250-18 NPTF	1.000-11.5 NPTF	1.000-11.5 NPTF	.250-18 NPTF	

1	151-996-SEE ABOVE	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE				REVISION	PART NO. KF*
TITLE BODY-3 PORT, IN-LINE, T-19A CAVITY W/GAGE PORT					
UNLESS OTHERWISE SPECIFIED		SCALE 1/2	REF. KC* = NO GAGE PORT	MATERIAL ALUM. INDENT	
DIMENSION TOL .x = ± .030 .xx = ± .015 .xxx = ± .005		DRAWN RJB	CHECK DAS	RELEASE 1918	HEAT TREAT & FINISH
ANGLE TOL ± 1° FINISH 125V REMOVE ALL BURRS		DATE 1-18-89	DATE 1-20-89	DATE 1-20-89	
LET.	REVISION	DATE	DRN	CHK	REL

