SYMBOL

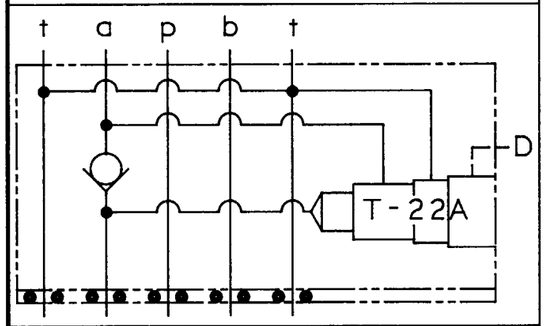

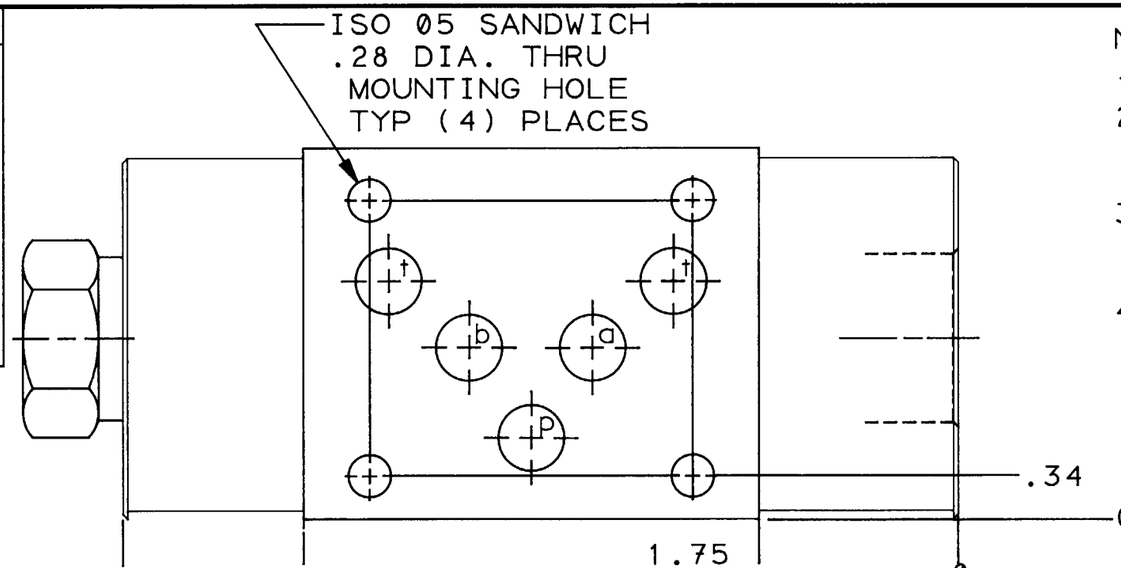

NOTES:

1) SEALS: BUNA-N
2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
3) CXFA XCN CARTRIDGE:
   CRACKING PRESSURE: 30 PSI ± 3
   CHECK SEAT: STEEL
4) ORDERING INFO:
   PVFA LAN NB2
   └CART. TO BE INSTALLED IN T-22A CAV. SEAL TYPE IN PVFA DETERMINES ITEM 3 SEAL TYPE

REVISION	PART NO.
	NB2

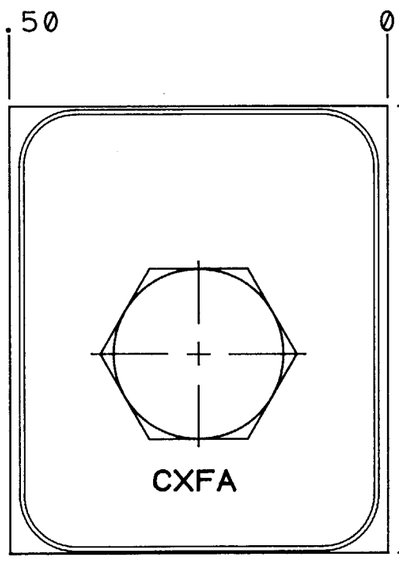

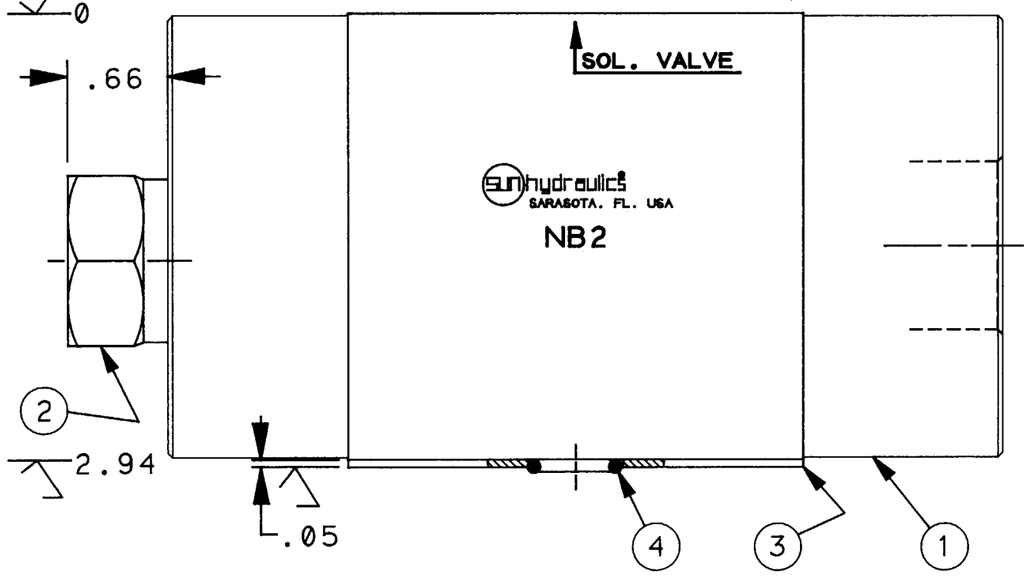

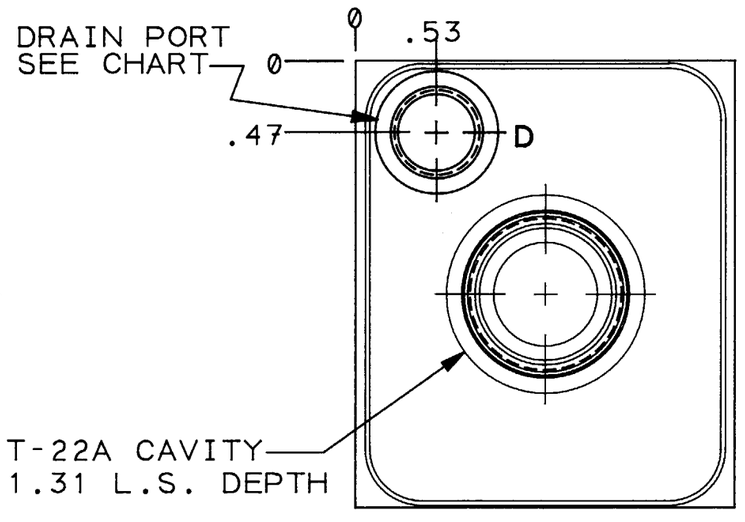

ITEM	PART NO.	PART NAME	QTY
4	700-001	SEAL PLATE	1
3	CXFA XCN	CHECK VALVE	1
2	500-001-014	"O"RING	5
1	152-242-SEE CHART	BODY	1

OUTLINE & ASSEM.

MODEL NUMBER	BODY DASH No.	DRAIN PORT "D"
NB2	-001	SAE-6
NB2/M	-002	.250-19 BSPP

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½°
FINISH 80√
REMOVE ALL BURRS

TITLE: ISO 05 SANDWICH- W/REVERSE FREE FLOW CHK

REVISION	PART NO.
	NB2

SCALE	REF.	MATERIAL	HEAT TREAT & FINISH
1 = 1		ALUMINUM, STEEL & NOTED.	

DRAWN	CHECK	RELEASE
BRS	JLB	3166
DATE 7-1-91	DATE 7-5-91	DATE 7-8-91

sun hydraulics® CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983