



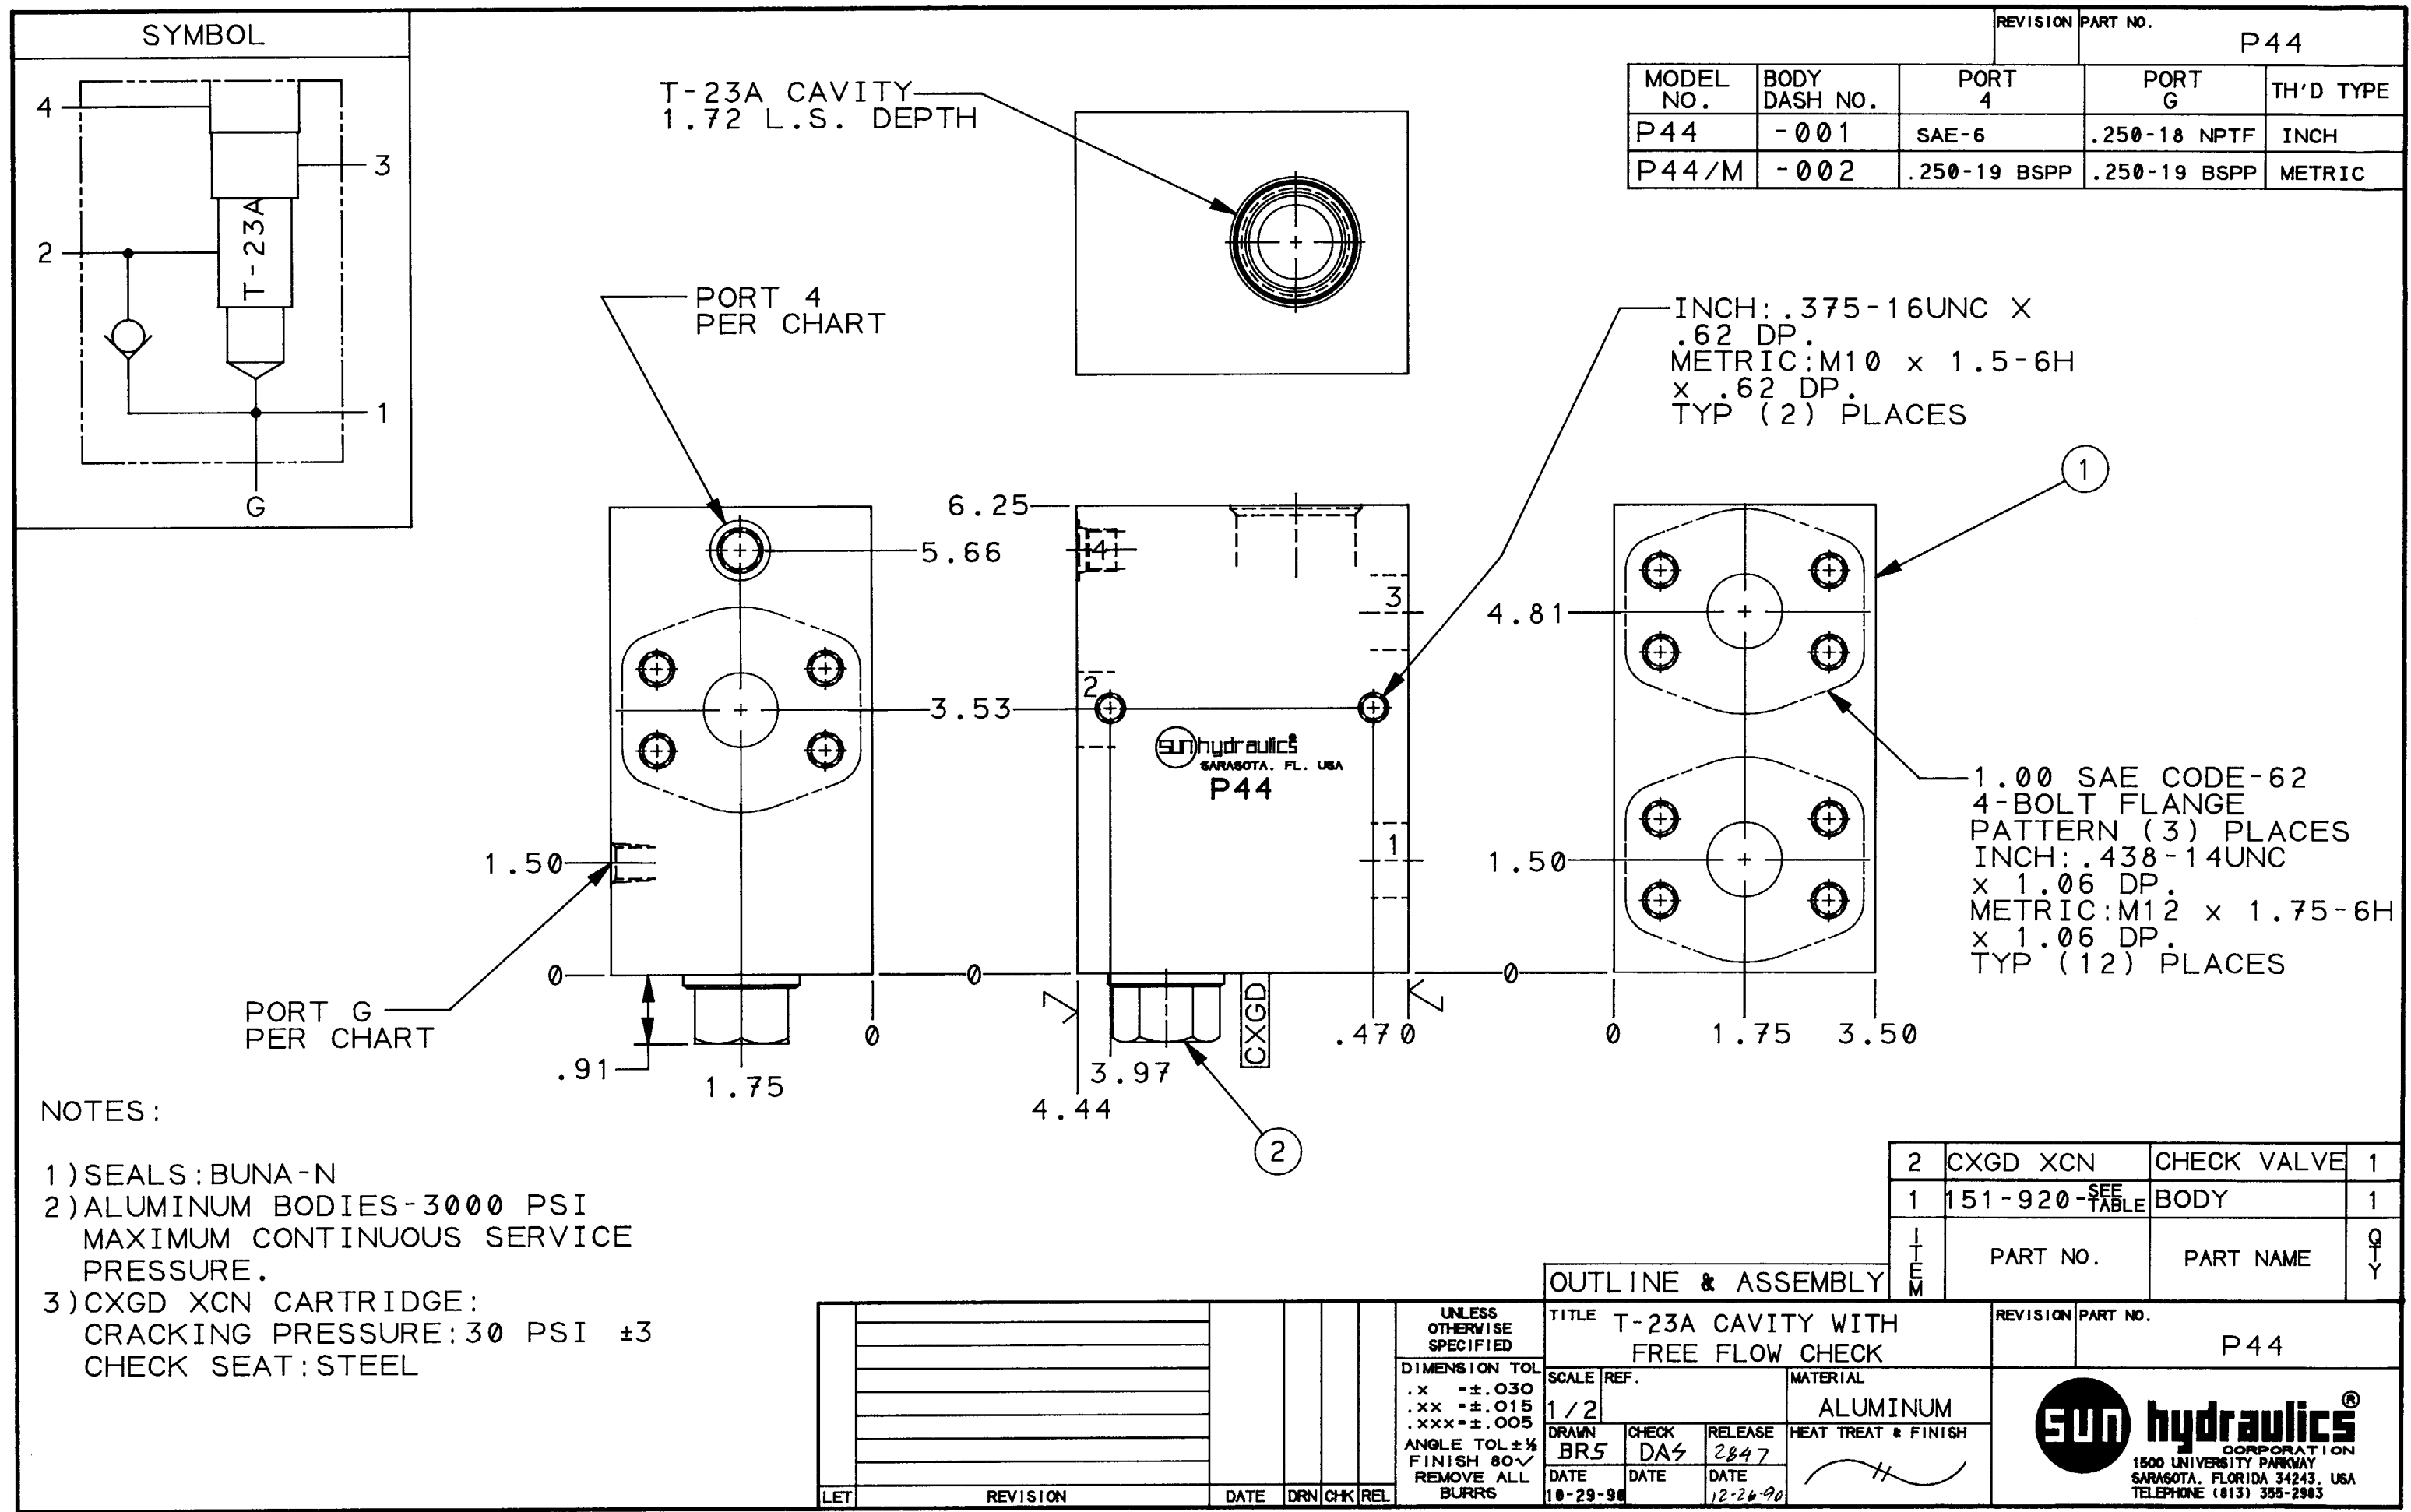

SYMBOL

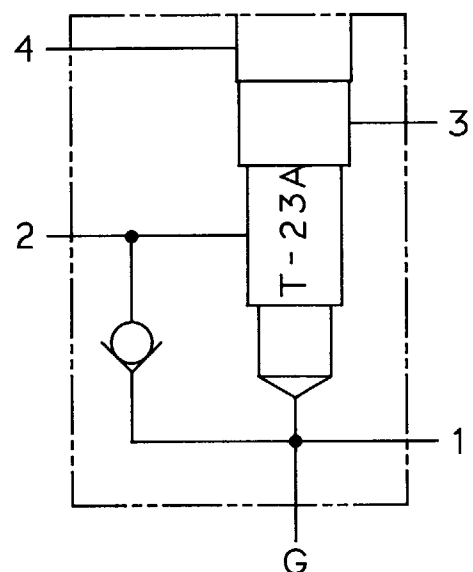

T-23A CAVITY
1.72 L.S. DEPTH

PORT 4
PER CHART

PORT G
PER CHART

MODEL NO.	BODY DASH NO.	PORT 4	PORT G	TH'D TYPE
P44	-001	SAE-6	.250-18 NPTF	INCH
P44/M	-002	.250-19 BSPP	.250-19 BSPP	METRIC

INCH: .375-16UNC X
.62 DP.
METRIC: M10 x 1.5-6H
x .62 DP.
TYP (2) PLACES

1.00 SAE CODE-62
4-BOLT FLANGE
PATTERN (3) PLACES
INCH: .438-14UNC
x 1.06 DP.
METRIC: M12 x 1.75-6H
x 1.06 DP.
TYP (12) PLACES

NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 3) CXGD XCN CARTRIDGE:
CRACKING PRESSURE: 30 PSI ±3
CHECK SEAT: STEEL

ITEM	PART NO.	PART NAME	QTY
2	CXGD XCN	CHECK VALVE	1
1	151-920-SEE TABLE	BODY	1

OUTLINE & ASSEMBLY

LET	REVISION	DATE	DRN	CHK	REL	UNLESS OTHERWISE SPECIFIED	TITLE	REVISION	PART NO.
						DIMENSION TOL .x = ±.030 .xx = ±.015 .xxx = ±.005 ANGLE TOL ±½ FINISH 80✓ REMOVE ALL BURRS	T-23A CAVITY WITH FREE FLOW CHECK		P44
						SCALE 1/2	REF.		
						DRAWN BR5	CHECK DAS	RELEASE 2847	
						DATE 10-29-90	DATE	DATE 12-26-90	
							MATERIAL ALUMINUM HEAT TREAT & FINISH		

