


A diagram showing a vertical stack of four rectangular boxes. The top box is labeled 'T-33A'. The entire stack is enclosed in a dashed rectangular border. Four leader lines with numbers point to specific parts: '1' points to the top box, '2' points to the third box from the top, '3' points to the left side of the second box from the top, and '4' points to the right side of the top box.

SYMBOL		REVISION B	PART NO. PMY

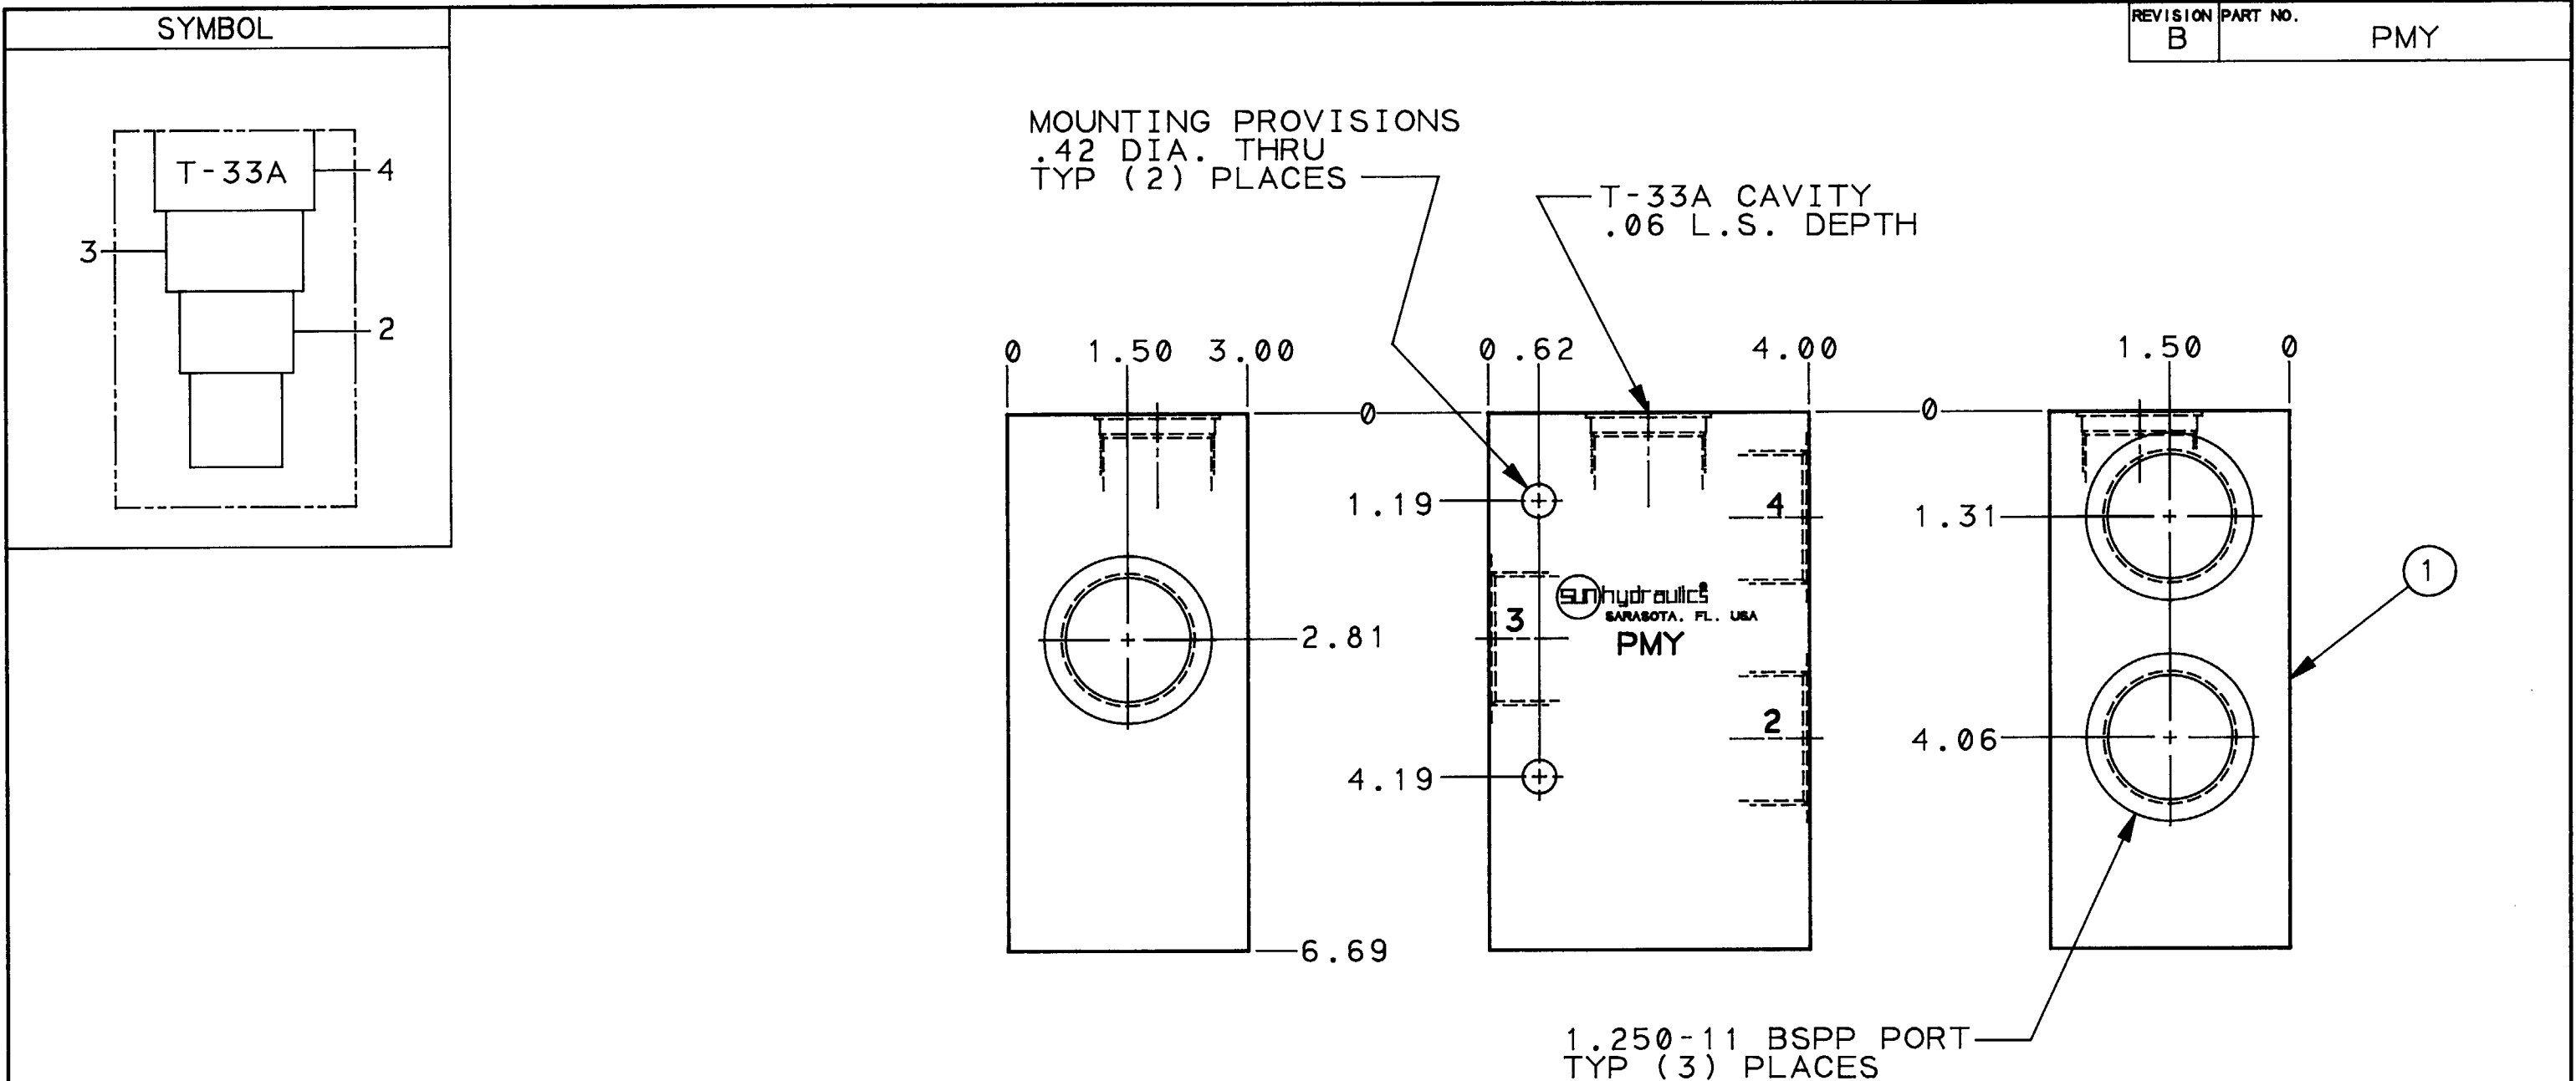

SYMBOL

T-33A

3

2

4

MOUNTING PROVISIONS
.42 DIA. THRU
TYP (2) PLACES

T-33A CAVITY
.06 L.S. DEPTH

0 1.50 3.00 0 0.62 4.00 0 1.50 0

1.19 2.81 4.19 6.69 1.31 4.06

1

1.250-11 BSPP PORT
TYP (3) PLACES

SUNhydraulics
SARASOTA, FL. USA
PMY

NOTES:

- 1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 2) FOR OTHER OPTIONS SEE OPTION
SHEET.

NOTES:

- 1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 2) FOR OTHER OPTIONS SEE OPTION
SHEET.

										1	152-156-003	BODY	1
										ITEM	PART NO.	PART NAME	QTY
										OUTLINE & ASSEMBLY			
										TITLE LINE MOUNTED T-33A CAV. 1.25-11 BSPP PORTS			
										REVISION B	PART NO. PMY		
													
										DIMENSION TOL .x ±.030 .xx ±.015 .xxx ±.005 ANGLE TOL ± FINISH 80✓ REMOVE ALL BURRS			
										SCALE REF. 1/2 MATERIAL ALUMIMUM BODY HEAT TREAT & FINISH			
										DRAWN BR5 CHECK R/B RELEASE DATE 7/27/89 DATE 7/28/89 DATE			
										DIMS. 1.19 WAS 1.09, 4.19 WAS 4.53, & 6.69 WAS 6.44. 7-5-90 BRS 2650 A REVISED STAMPING. 11-28-90 RJB 2318 LET REVISION DATE DRN CHK REL			