

- NOTES:
- 1) SEALS: BUNA-N

2) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.

SUN STD SAE-4 PORT
TYP (3) PLACES

T-23A CAVITY
1.625 L.S. DEPTH

.41 DIA THRU
TYP (8) PLACES

1.00 DIA SAE CODE 61
4-BOLT FLANGE PATTERN
TYP (4) PLACES

SUN hydraulics


SARASOTA, FL. USA

VEY

-219

"O" RING

SYMBOL

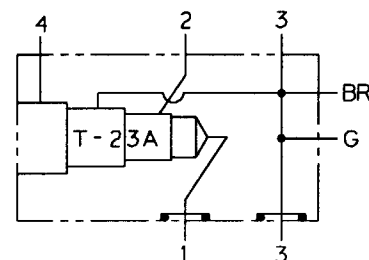

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED	TITLE BODY: SANDWICH MOUNTED T-23A CAVITY FOR SPECIAL CHARLYN 10000 SERIES	SCALE REF. 1:1	MATERIAL ALUM & STEEL
DIMENSION TOL .X ±.030 .XX ±.015 .XXX ±.005	DATE 21 JUN 94	CHECK DATE 21 JUN 94	HEAT TREAT & FINISH DATE 22 JUN 94
ANGLE TOL ± 1/2° FINISH 80V REMOVE ALL BURRS			

2	500-001-219	"O" RING	2
1	153-403	BODY	1
ITEM	PART NO.	PART NAME	QTY

REVISION	PART NO.	VEY

