NOTES:

1) ALUMINUM BODIES - 3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.

2) FOR MOUNTING BRACKET INFO SEE CATALOG OR DWG 991-021-***.

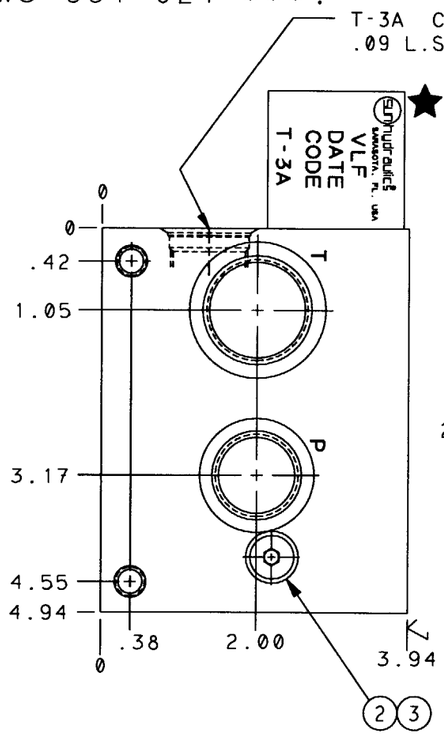

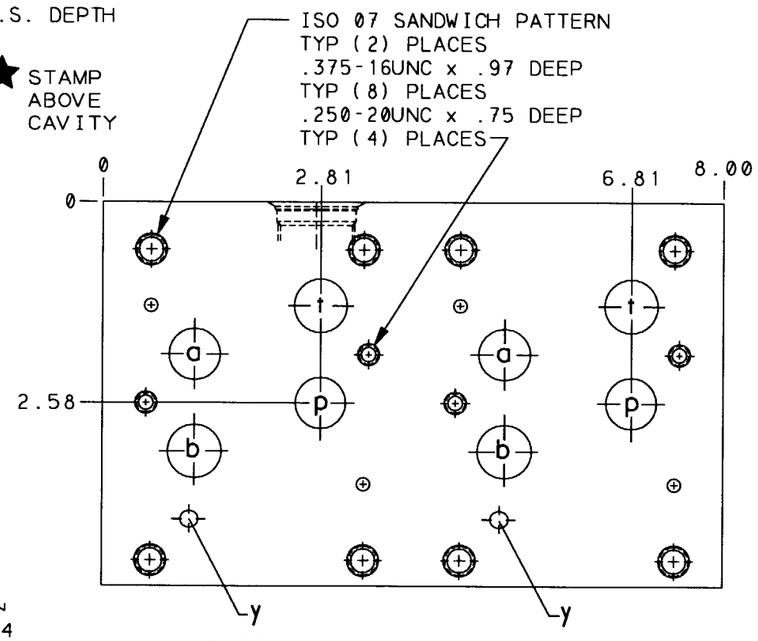

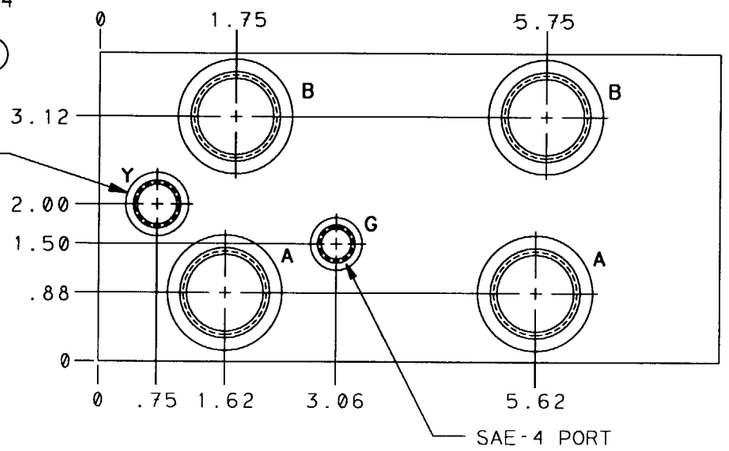

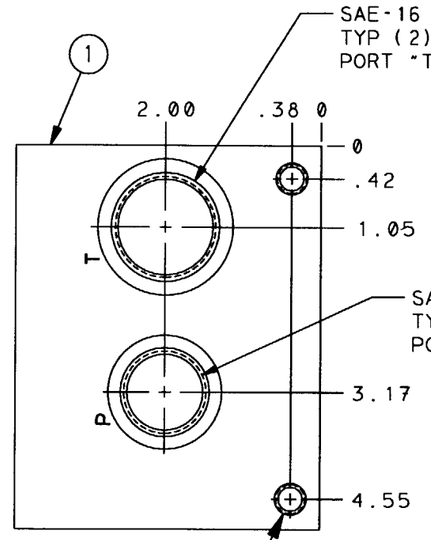

MOUNTING HOLES:
.375-16UNC x .75 DEEP
TYP (4) PLACES
(2) EACH END

SYMBOL

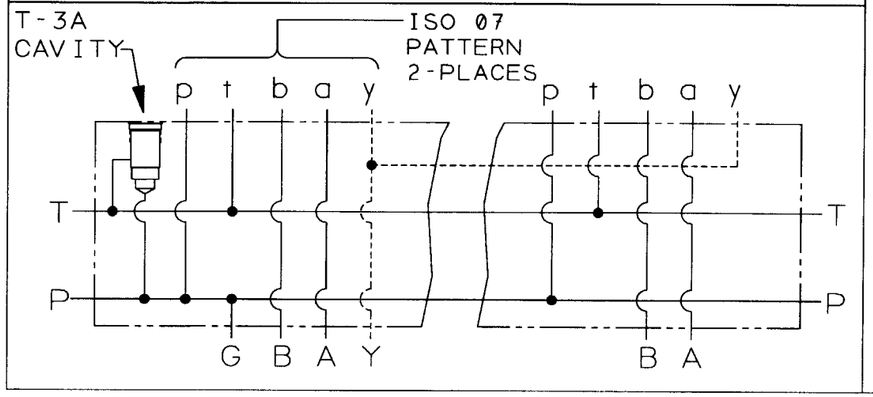

ITEM	PART NO.	PART NAME	QTY
3	330-006-004	PLUG	1
2	500-002-904	"O" RING	1
1	153-229-002	BODY	1

OUTLINE

TITLE TWO STATION ISO 07 BAR MANIFOLD PARALLEL CIRCUIT WITH RELIEF CAVITY & "Y" PORT

REVISION | PART NO. VLF

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.X ±.030
.XX ±.015
.XXX ±.005
ANGLE TOL ±½°
FINISH 80√
REMOVE ALL BURRS

SCALE 1/2 | REF.
DRAWN BRS | CHECK
DATE 03 JAN94 | DATE
RELEASE 532 | DATE
MATERIAL ALUMINUM
HEAT TREAT & FINISH

LET | REVISION | DATE | DRN | CHK | REL

sun hydraulics CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2363