


SYMBOL



3RD ANGLE
PROJECTION

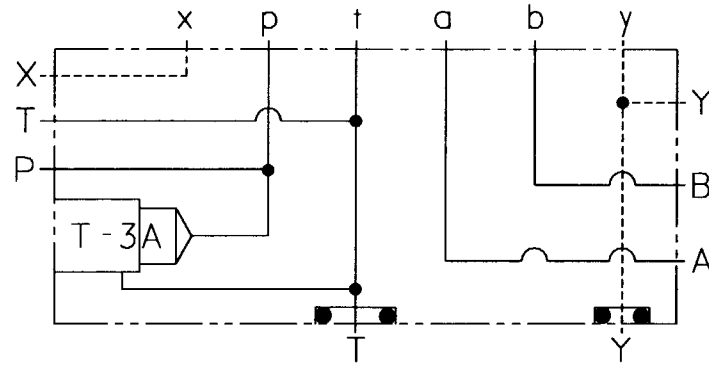

REVISION
A


PART NO.
VTF

NOTES:

- 1) SEALS: BUNA N.
- 2) ALUMINUM BODY-3000 PSI
MAXIMUM CONTINUOUS
SERVICE PRESSURE.
- 3) FOR OTHER OPTIONS SEE
CATALOG.


MOUNTING PROVISIONS

.41 DIA THRU
.59 DIA CBORE x .56 DP
SEALED ON OPP. FACE
TYP (2) PLACES

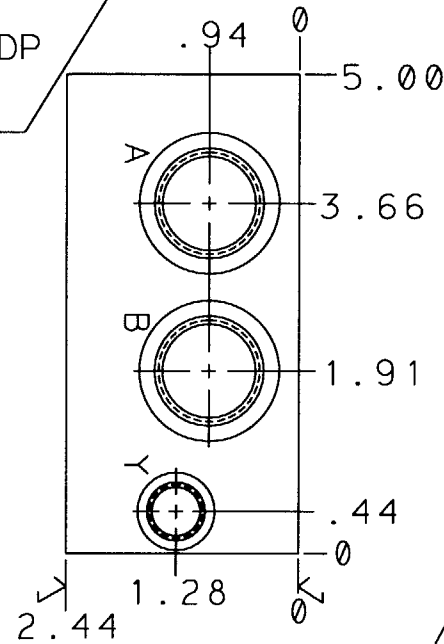


ISO 07 PATTERN
.250-20 UNC x .56 DP
TYP (2) PLACES
.375-16 UNC x .56 DP
TYP (4) PLACES.


T-3A CAVITY
.16 L.S. DEPTH

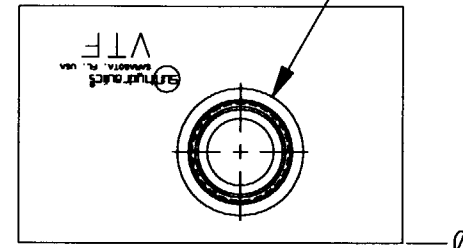

"A,B,P,&T" PORT
SUN STD SAE-12

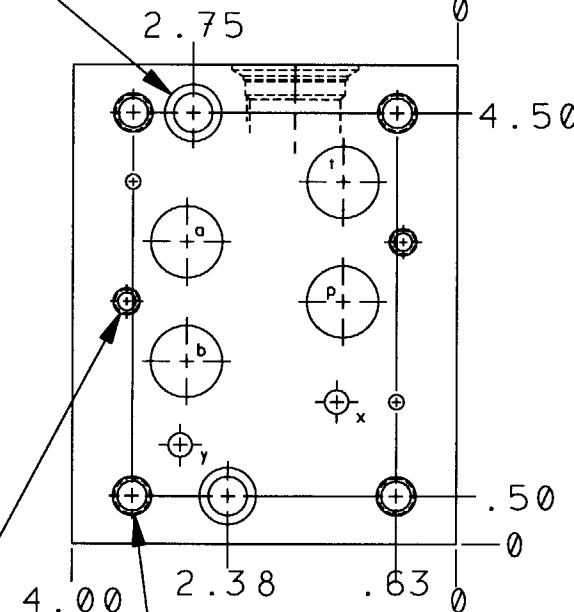


"X" AND "Y" PORT
SUN STD SAE-6

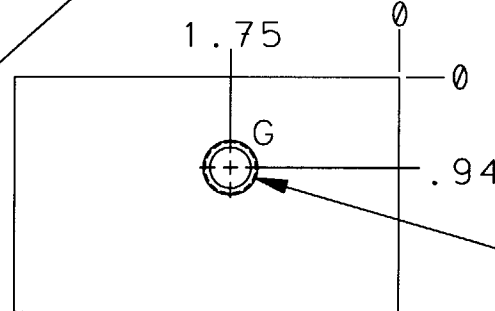

GAGE PORT
.25-18 NPTF

"T" PORT
.75-14 NPTF
O-RING I.D. = 1.54

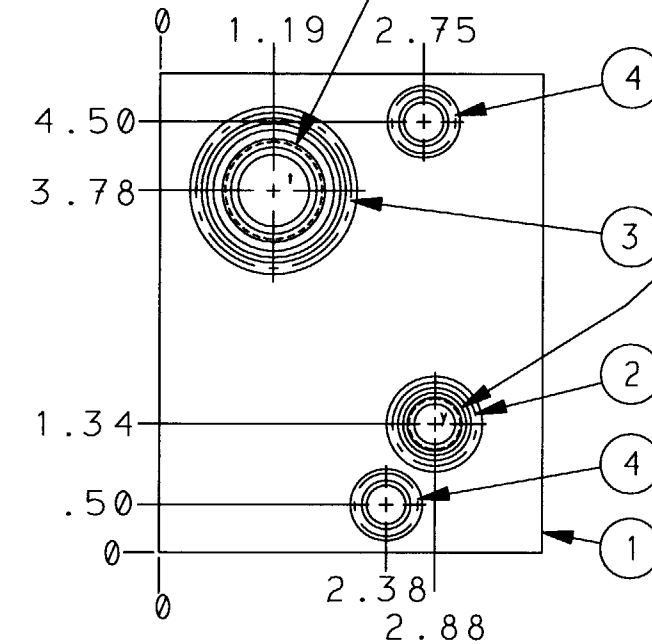

"Y" PORT
.25-18 NPTF
O-RING I.D. = .79

ITEM	PART NO.	PART NAME	QTY
4	500-001-113	O-RING	2
3	500-001-129	O-RING	1
2	500-001-117	O-RING	1
1	153-067-002	BODY	1

OUTLINE & ASSEMBLY

TITLE BODY-ISO 07 SUBPLATE, T-3A
FROM P to T, SIDE PORTED w/
GASKETED "T" AND "Y" PORTS.

SCALE 1/2	REF. VTE AND VTG	MATERIAL ALUMINUM AND NOTED HEAT TREAT & FINISH
DRAWN R/B	CHECK DAZ	RELEASE
DATE 21 DEC 92	DATE 22 DEC 92	DATE

REVISION	DATE	DRN	CHK	REL
A	04 MAR 94	RJB		
LET				

UNLESS
OTHERWISE
SPECIFIED
DIMENSION TOL
.x ±.030
.xx ±.015
.xxx ±.005
ANGLE TOL ± 1/2°
FINISH 80✓
REMOVE ALL
BURRS

REVISION
A

PART NO.
VTF

