


SYMBOL



3RD ANGLE
PROJECTION

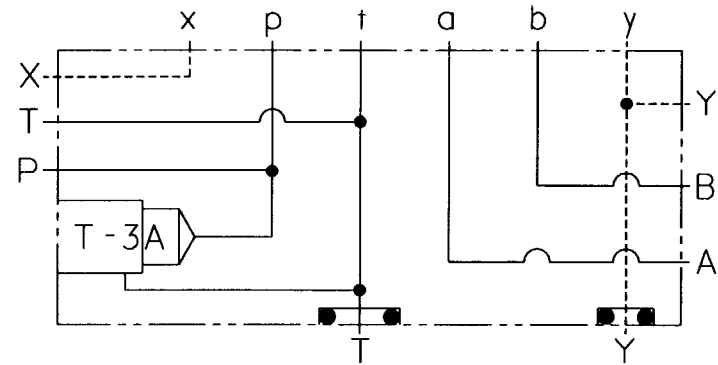

REVISION
A


PART NO.

VTG


NOTES:

- 1) SEALS: BUNA N.
- 2) ALUMINUM BODY-3000 PSI
MAXIMUM CONTINUOUS
SERVICE PRESSURE.
- 3) FOR OTHER OPTIONS SEE
CATALOG.

MOUNTING PROVISIONS
.42 DIA THRU
.69 DIA CBORE x .56 DP
SEALED ON OPP. FACE
TYP (2) PLACES

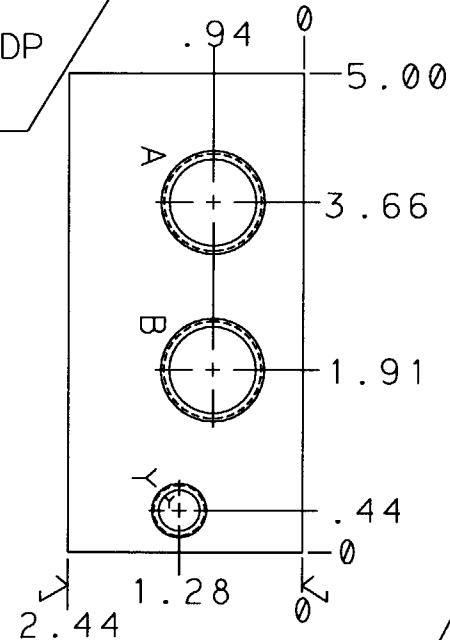


ISO 07 PATTERN
M6x1.0-6H x .56 DP
TYP (2) PLACES
M10x1.5-6H x .56 DP
TYP (4) PLACES.

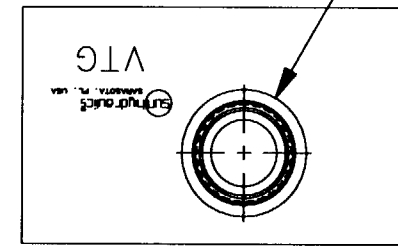


T-3A CAVITY
.16 L.S. DEPTH

"A,B,P,&T" PORT
.75-14 BSPP

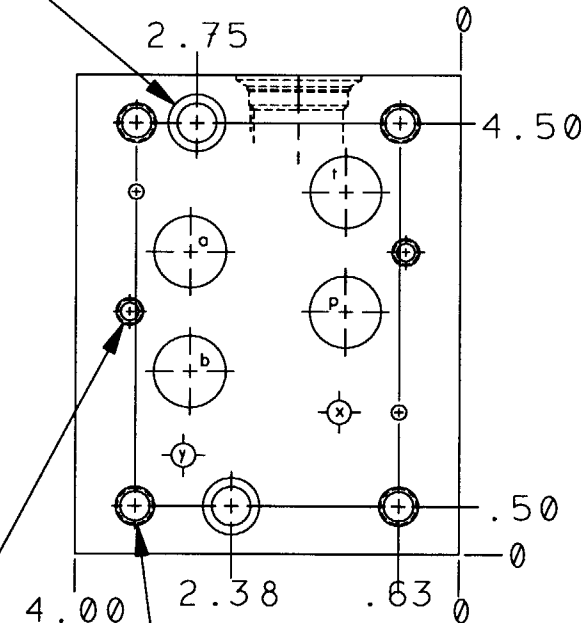


"X" AND "Y" PORT
.25-19 BSPP

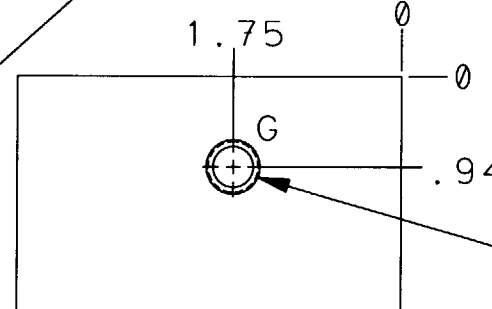

GAGE PORT
.25-19 BSPP

"T" PORT
.75-14 NPTF
O-RING I.D. = 1.54

"Y" PORT
.25-18 NPTF
O-RING I.D. = .79

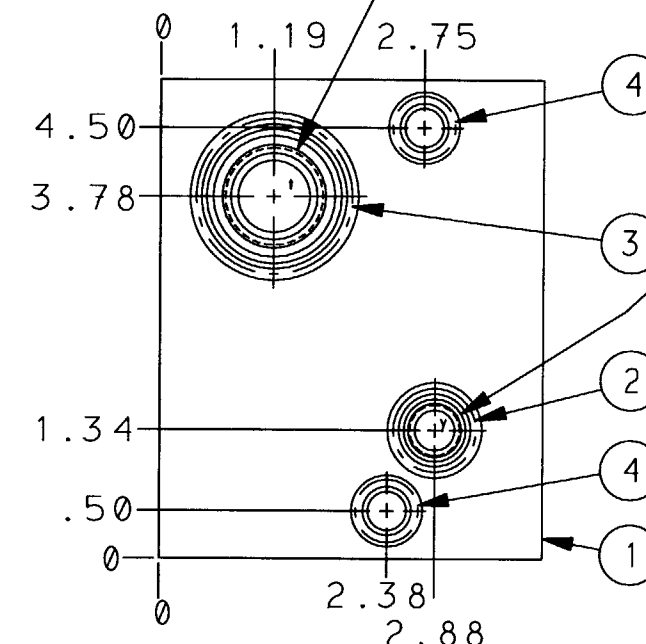

ITEM	PART NO.	PART NAME	QTY
4	500-001-113	O-RING	2
3	500-001-129	O-RING	1
2	500-001-117	O-RING	1
1	153-067-003	BODY	1

OUTLINE & ASSEMBLY

TITLE BODY-ISO 07 SUBPLATE, T-3A
FROM P 10 T, SIDE PORTED W/
GASKETED "T" AND "Y" PORTS.

REVISION
A

PART NO.
VTG

SCALE REF.
1/2 VTE AND VTF

MATERIAL
ALUMINUM AND
NOTED
HEAT TREAT & FINISH

DRAWN
R/B

CHECK
DAZ

RELEASE
DATE

DATE
21 DEC 92



LET	REVISION	DATE	DRN	CHK	REL
A	PORTS ON CAV IN SYM WERE REVERSED.	04 MAR 94	RJB		

UNLESS
OTHERWISE
SPECIFIED
DIMENSION TOL
.x ±.030
.xx ±.015
.xxx ±.005
ANGLE TOL ± 1/2
FINISH 80
REMOVE ALL
BURRS