




T-17A CAVITY
.906 L.S. DEPTH
TYP (2) PLACES

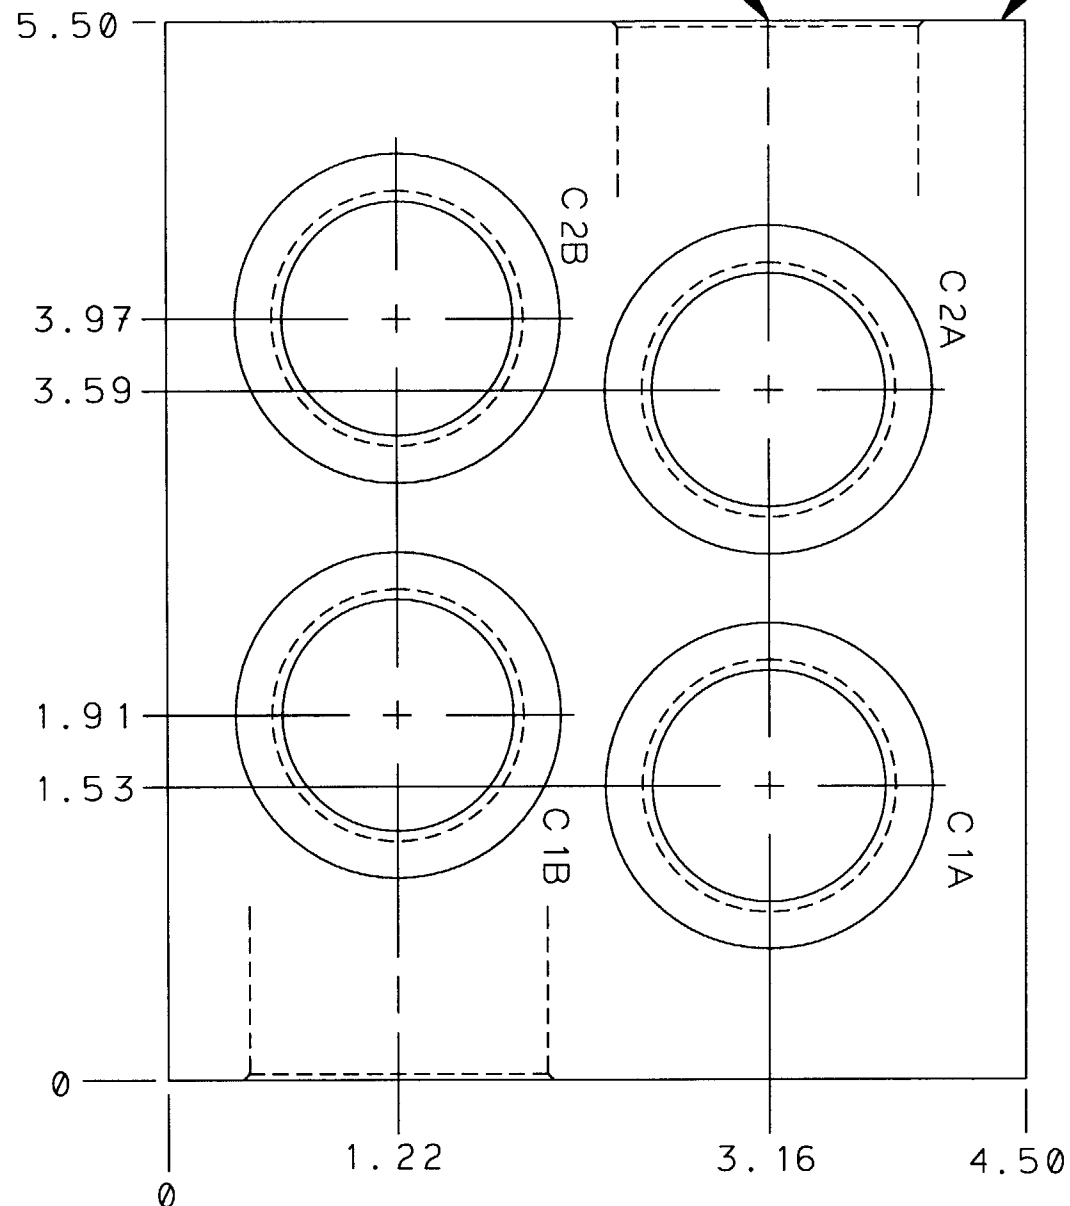

.42 DIA THRU
TYP (2) PLACES

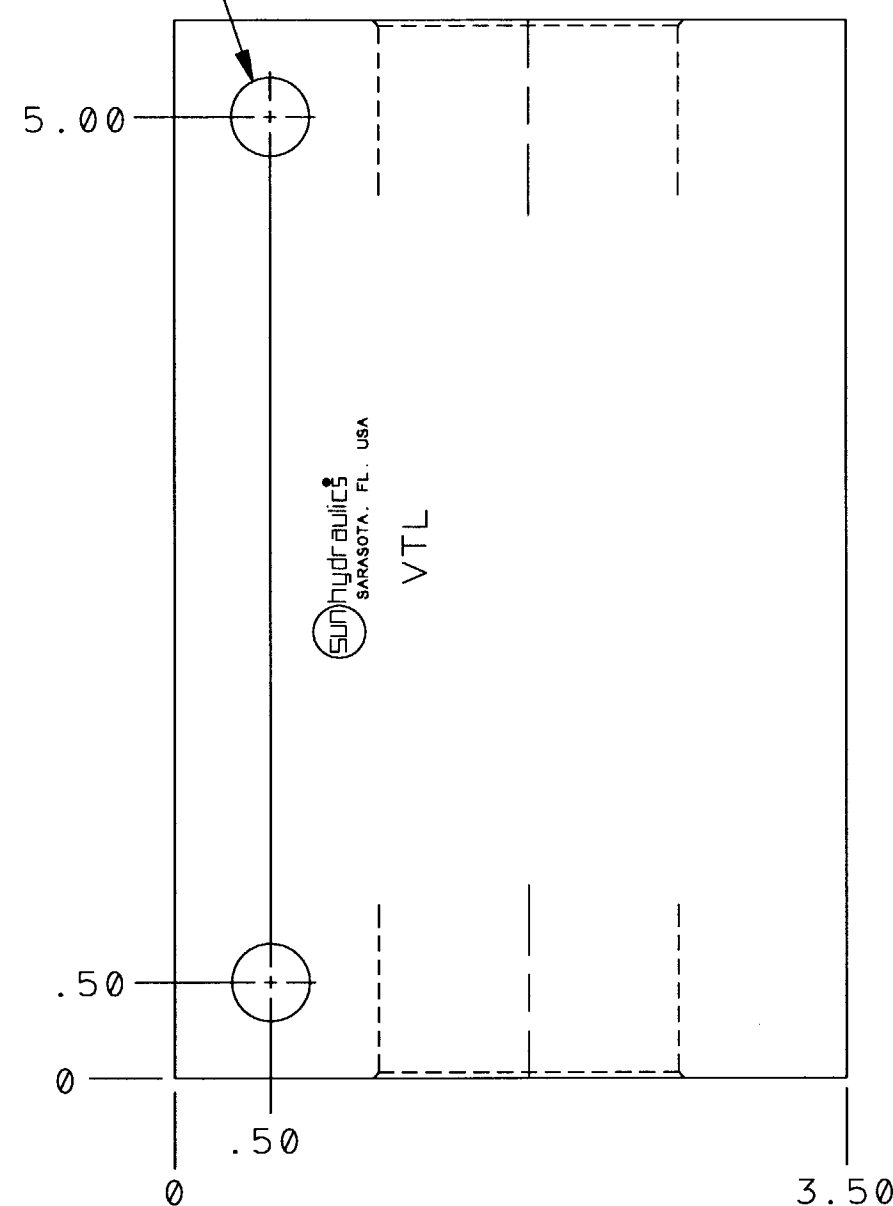


1.00-11 BSPP PORT
TYP (6) PLACES

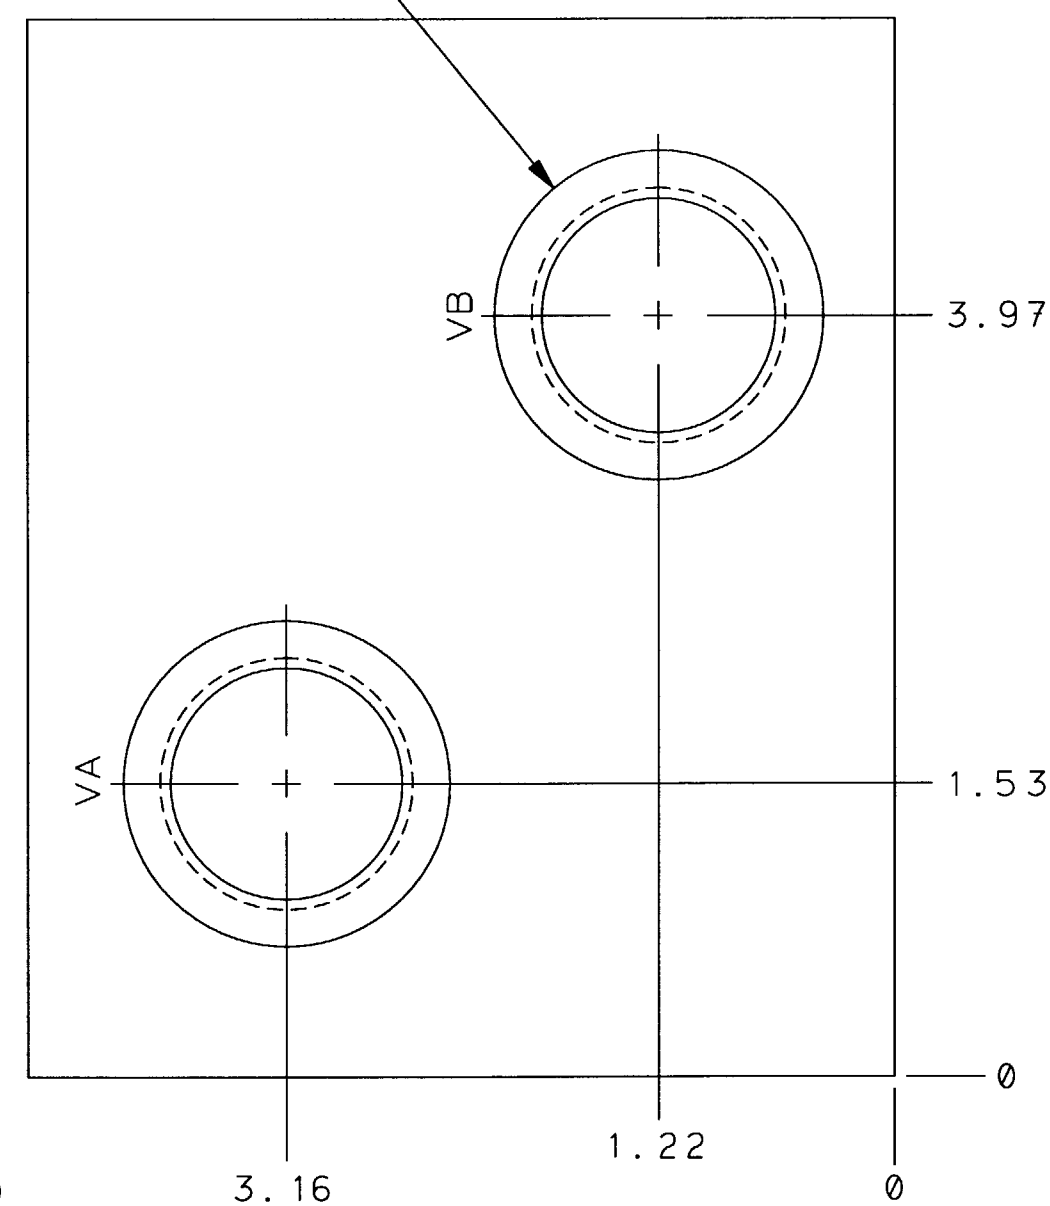

REVISION PART NO. VTL

NOTES:

- 1) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE
- 2) OTHER OPTIONS: SEE OPTION SHEET

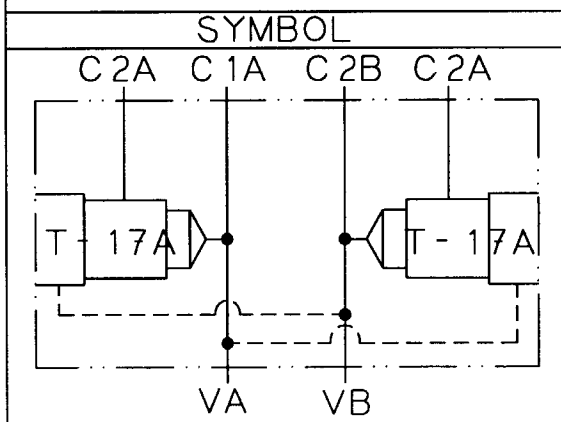

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x ±.030
.xx ±.015
.xxx ±.005
ANGLE TOL ± 1/2
FINISH 80✓
REMOVE ALL BURRS

OUTLINE			
TITLE	BODY-DUAL SERIES 3 DIRECT- ACTING SEQUENCE VALVE w/ REVERSE FREE-FLOW CHECK	REVISION	PART NO.
SCALE	REF.	MATERIAL	ALUMINUM
DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
DATE	DATE	DATE	
11-12-92	13	NOV 92	

1	152-942-003	BODY	1
ITEM	PART NO.	PART NAME	QTY

REVISION PART NO. VTL

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983