


SYMBOL


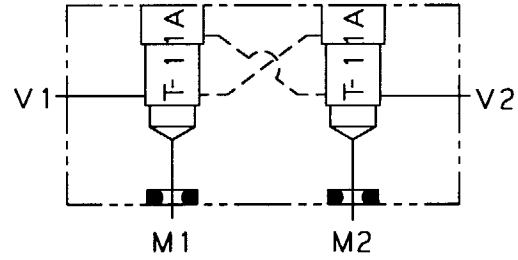


NOTES:



- 1) SEALS= BUNA N.
- 2) ALUMINUM BODIES- 3000 PSI MAXIMUM CONTINUOUS SYSTEM PRESSURE.

.50-14 NPTF PORTS
TYP BOTH ENDS

T-11A CAVITY
.69 L.S. DEPTH
(2) PLACES.

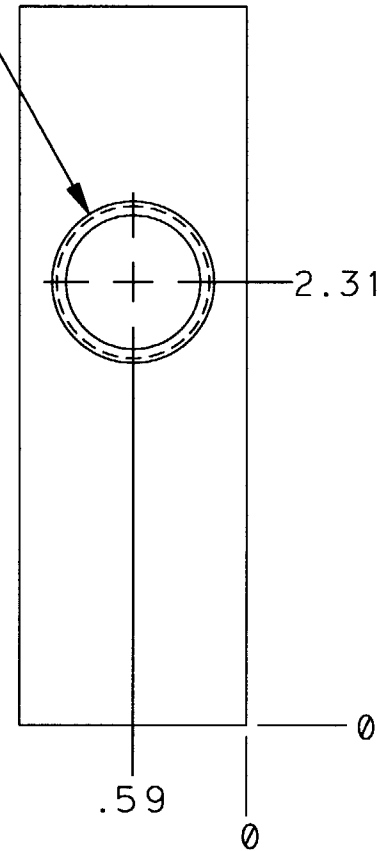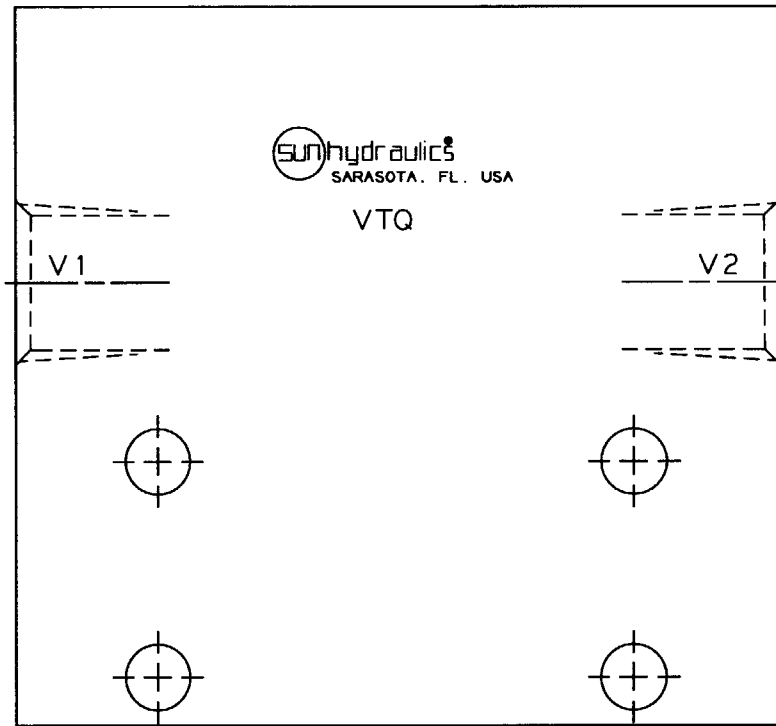

.34 DIA HOLE.
TYP (4) PLACES.

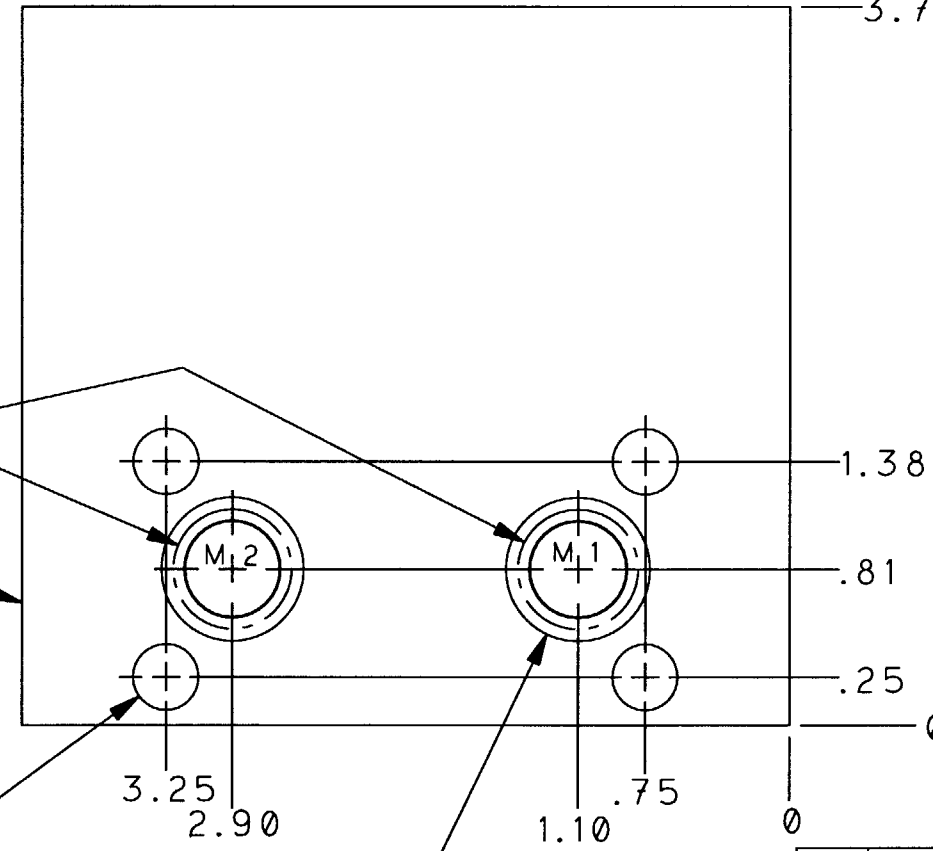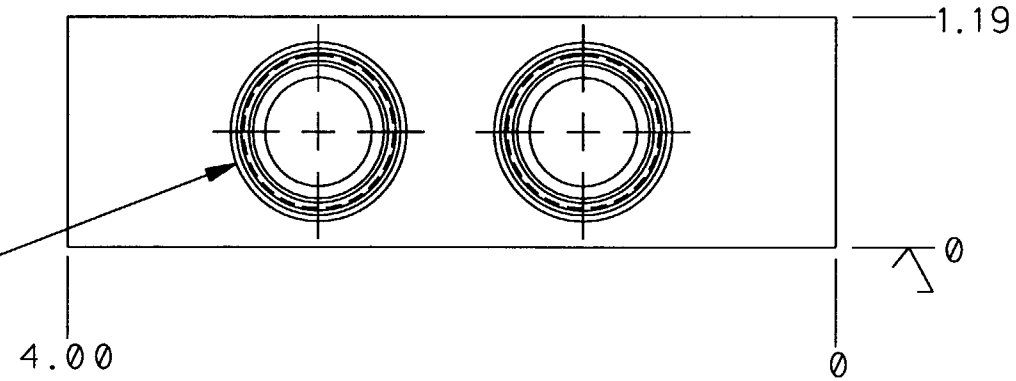

-113 O RING
.50 DIA HOLE.

2	500-001-113	O RING	2
1	152-925-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x ±.030
.xx ±.015
.xxx ±.005
ANGLE TOL ±½
FINISH 80✓
REMOVE ALL BURRS

OUTLINE & ASSEM.		
TITLE	BODY-H & S MOTOR MTD. DUAL X-PILOTED T-11A. .50 NPTF PORTS.	
SCALE	1=1	
REF.	VTR VTS	
DRAWN	CHECK	RELEASE
R/B		4062
DATE	DATE	DATE
07 OCT92		10-6-92

MATERIAL	ALUMINUM
AND NOTED	
HEAT TREAT & FINISH	

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983

REVISION	PART NO.
	VTQ