

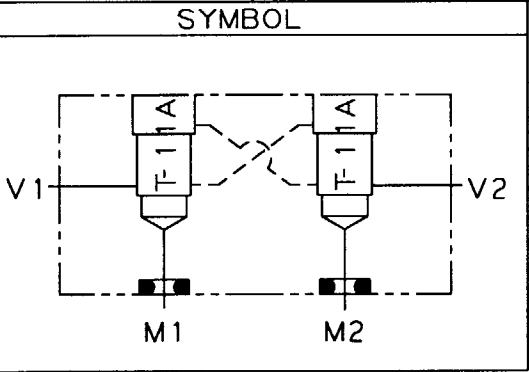
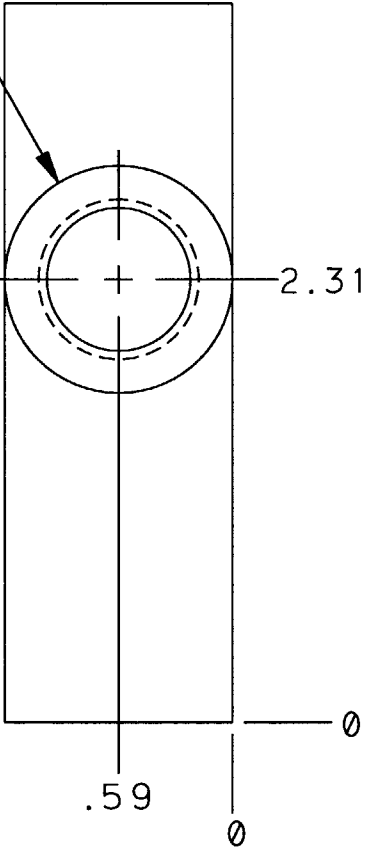


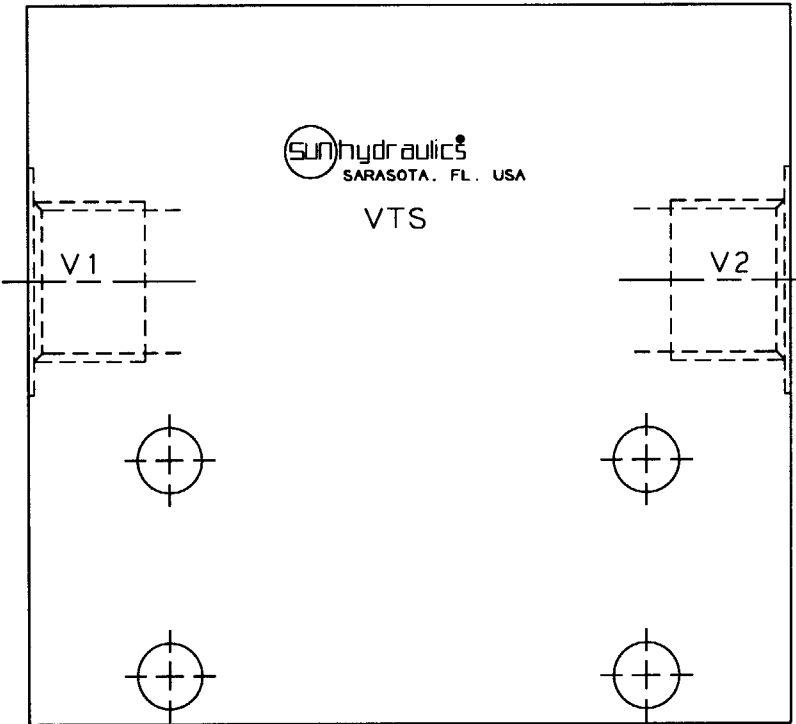


- NOTES:
- 1) SEALS= BUNA N.
 - 2) ALUMINUM BODIES- 3000 PSI MAXIMUM CONTINUOUS SYSTEM PRESSURE.

.50-14 BSPP PORTS
TYP BOTH ENDS


T-11A CAVITY
.69 L.S. DEPTH
(2) PLACES.

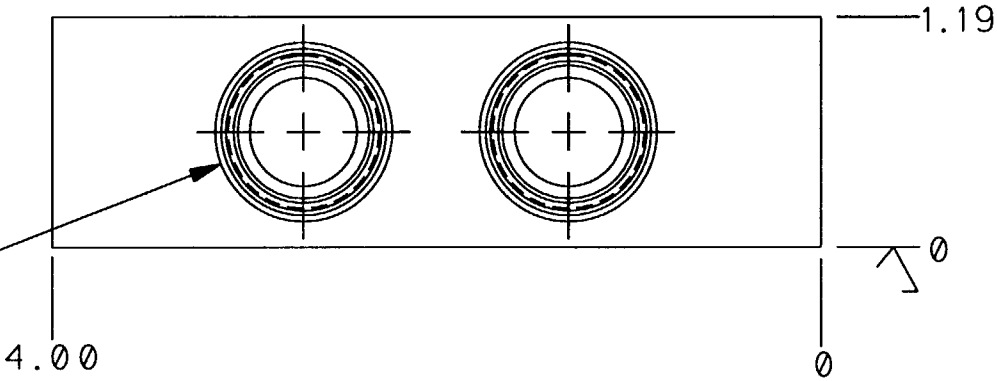

.34 DIA HOLE.
TYP (4) PLACES.

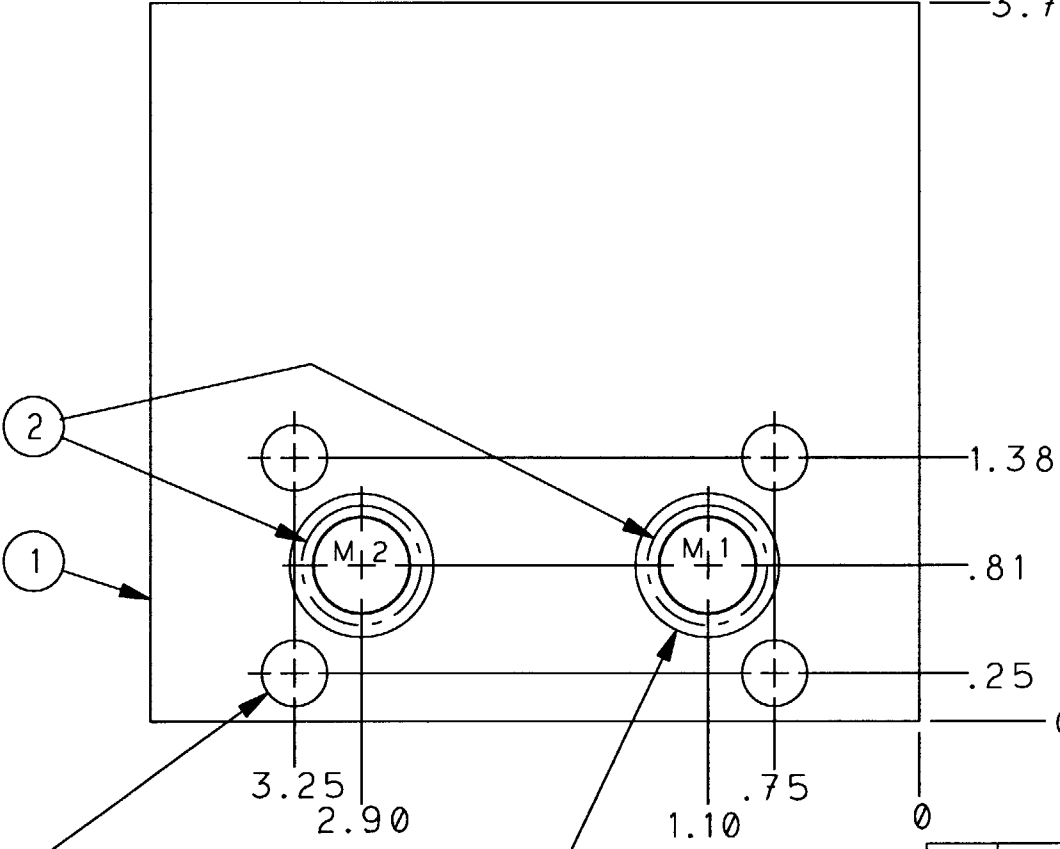

-113 O RING
.50 DIA HOLE.

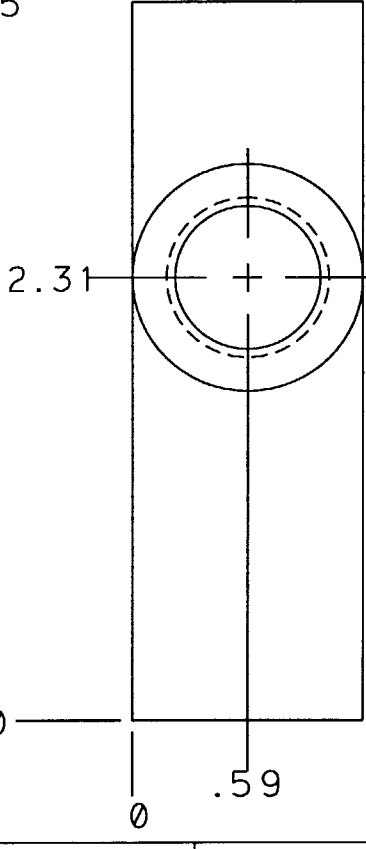

2	500-001-113	O RING	2
1	152-925-003	BODY	1
ITEM	PART NO.	PART NAME	QTY

LET	REVISION	DATE	DRN	CHK	REL
-----	----------	------	-----	-----	-----

UNLESS OTHERWISE SPECIFIED

DIMENSION TOL

.x ±.030

.xx ±.015

.xxx ±.005

ANGLE TOL ±1/2

FINISH 80

REMOVE ALL BURRS

OUTLINE & ASSEM.		
TITLE BODY-H & S MOTOR MTD. DUAL X-PILOTED T-11A. .50 BSPP PORTS.		
SCALE	REF.	
1=1	VTQ VTR	
DRAWN	CHECK	RELEASE
R/B		4062
DATE	DATE	DATE
07 OCT92		10-07-92

REVISION

PART NO. VTS



SUN hydraulics CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983