

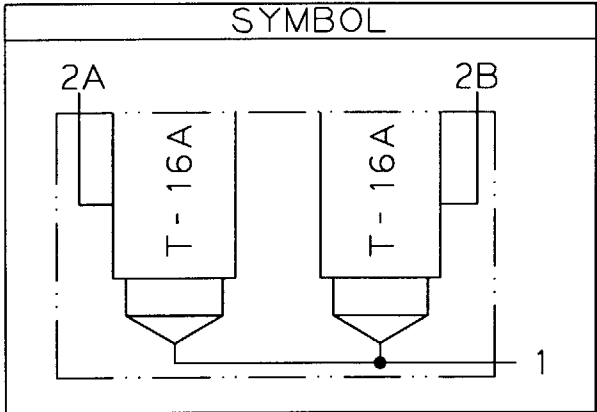


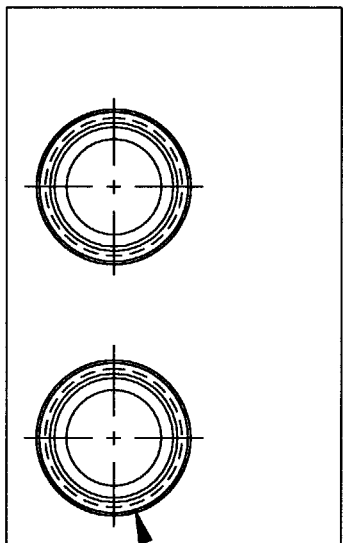


REVISION	PART NO.
A	VVG

NOTES:


- 1) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS
SERVICE PRESSURE.
- 2) OTHER OPTIONS: SEE
OPTION SHEET.

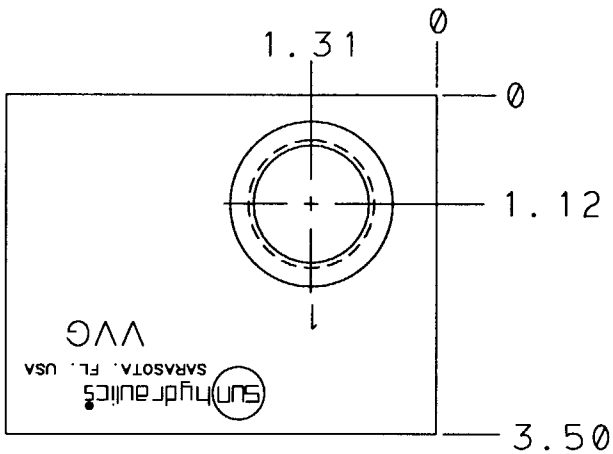

T-16A CAVITY
.062 L.S. DEPTH
TYP (2) PLACES

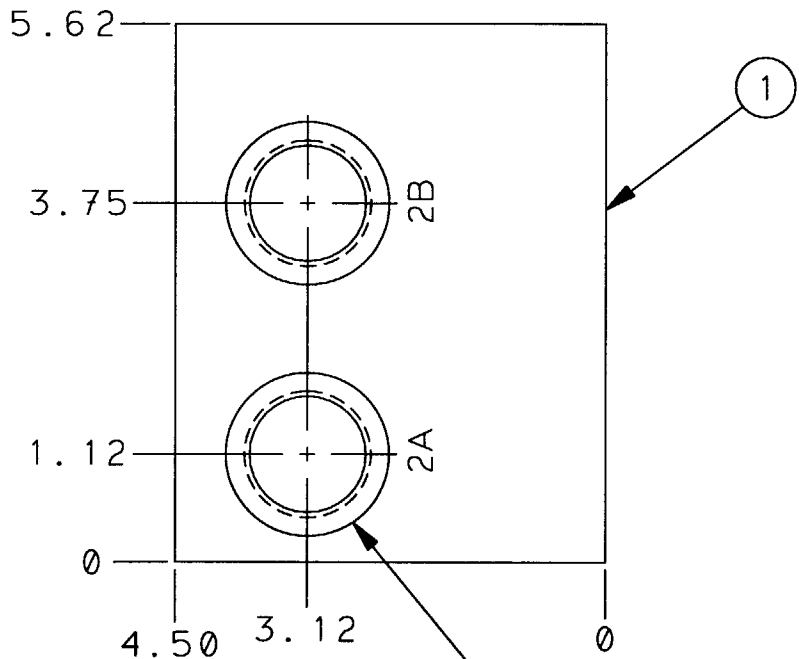

1.000-11 BSPP PORT
TYP (3) PLACES

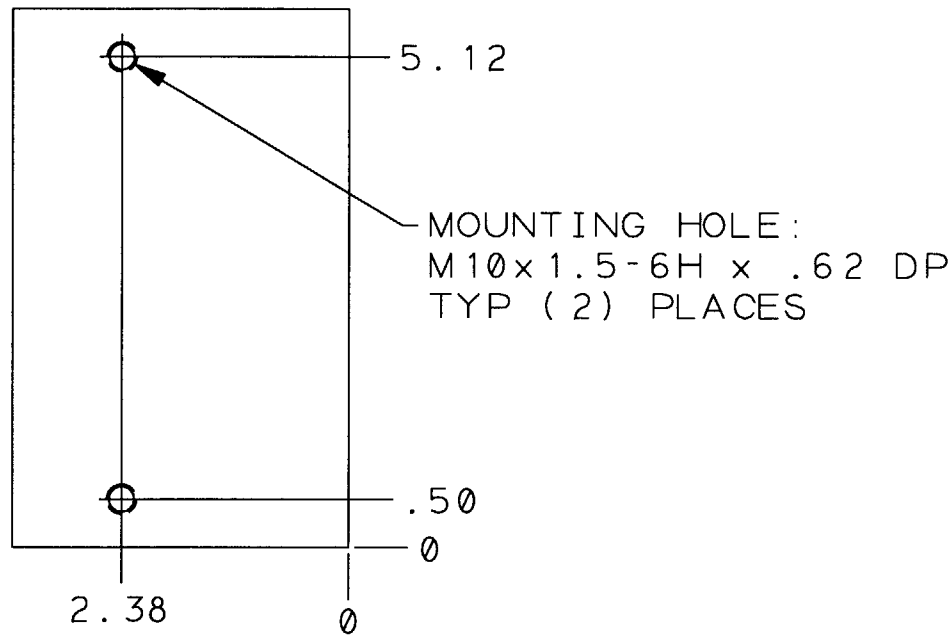

MOUNTING HOLE:
M10x1.5-6H x .62 DP
TYP (2) PLACES

ITEM	PART NO.	PART NAME	QTY
1	152-888-008	BODY	1

OUTLINE						REVISION	PART NO.
TITLE BODY-DUAL T-16A CAVITIES						A	VVG
UNLESS OTHERWISE SPECIFIED			SCALE REF.		MATERIAL		
DIMENSION TOL			1/2		ALUMINUM		
.x ±.030			DRAWN		HEAT TREAT & FINISH		
.xx ±.015			DAS		3859		
.xxx ±.005			CHECK		DATE		
ANGLE TOL ±1/2			DATE		7-27-92		
FINISH 80✓			DATE		7-27-92		
REMOVE ALL BURRS			DATE		7-27-92		
A	CHANGED PORT STAMPING	21 DEC 92	DAS	426			
LET	REVISION	DATE	DRN	CHK			

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983