
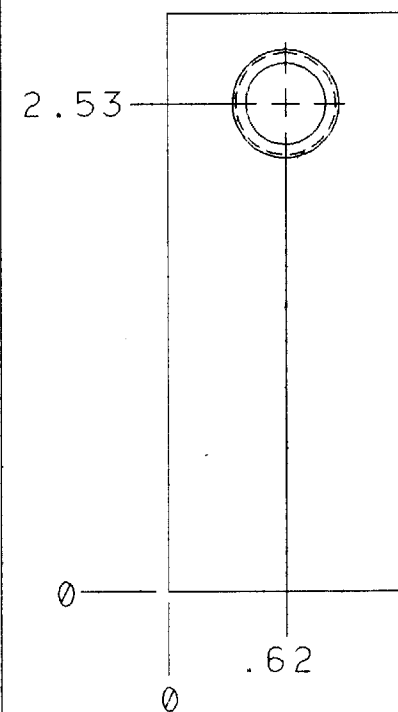
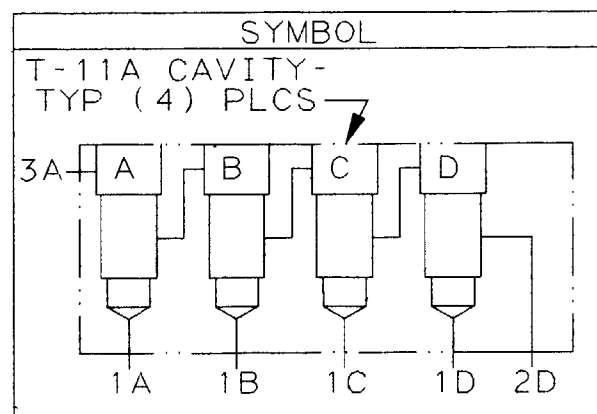


T-11A CAVITY
.688 L.S. DEPTH
TYP (4) PLACES

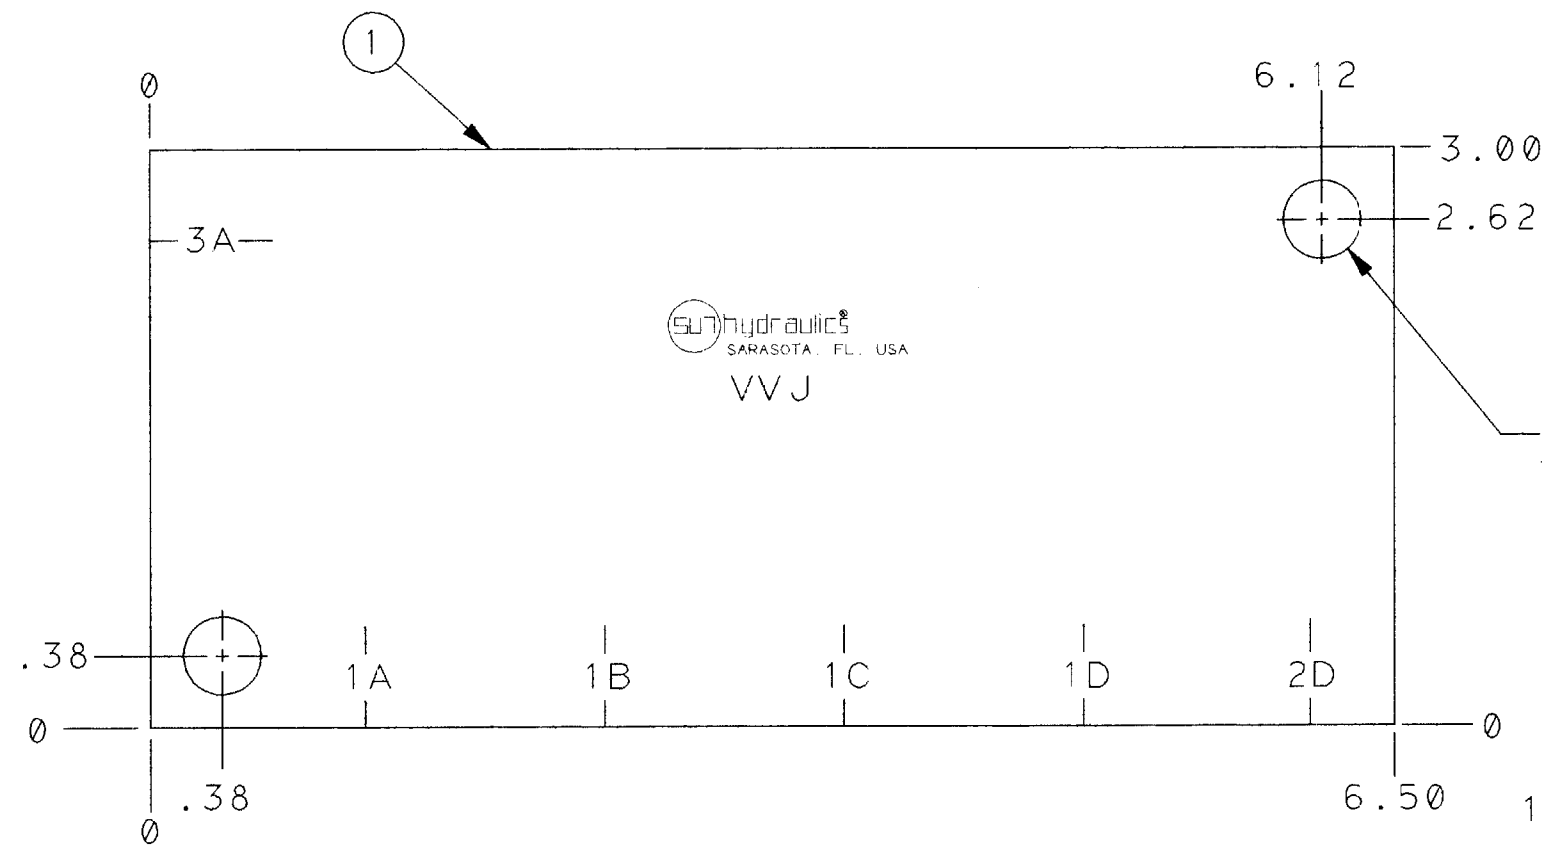


.41 DIA THRU
TYP (2) PLACES

NOTES:

- 1) ALUMINUM BODIES: 3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
- 2) OTHER OPTIONS: SEE OPTION SHEET.

.250-18 NPTF PORT
TYP (6) PLACES

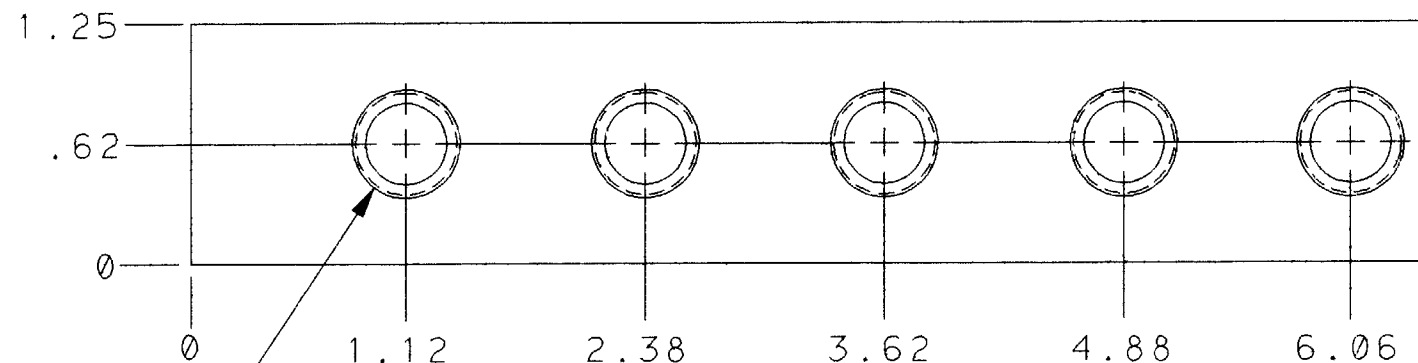

1	152-869-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

				UNLESS OTHERWISE SPECIFIED				TITLE 4-CAVITY LOAD SENSE SHUTTLE BODY				REVISION		PART NO.		VVJ			
				DIMENSION TOL				SCALE		REF.		MATERIAL							
				.x = ±.030				1:1				ALUMINUM							
				.xx = ±.015															
				.xxx = ±.005															
				ANGLE TOL ± 1/2				DRAWN		CHECK		RELEASE		HEAT TREAT & FINISH					
				FINISH 80✓				DAS				3799							
				REMOVE ALL BURRS				DATE		DATE		DATE							
								6-16-92				6-24-92							
LET				REVISION				DATE		DRN		CHK		REL					
																hydraulics [®]			
																CORPORATION			
																1500 UNIVERSITY PARKWAY			
																SARASOTA, FLORIDA 34243, USA			
																TELEPHONE (813) 355-2983			