

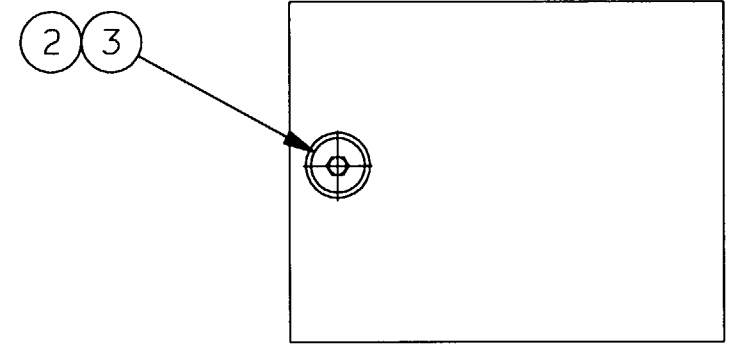
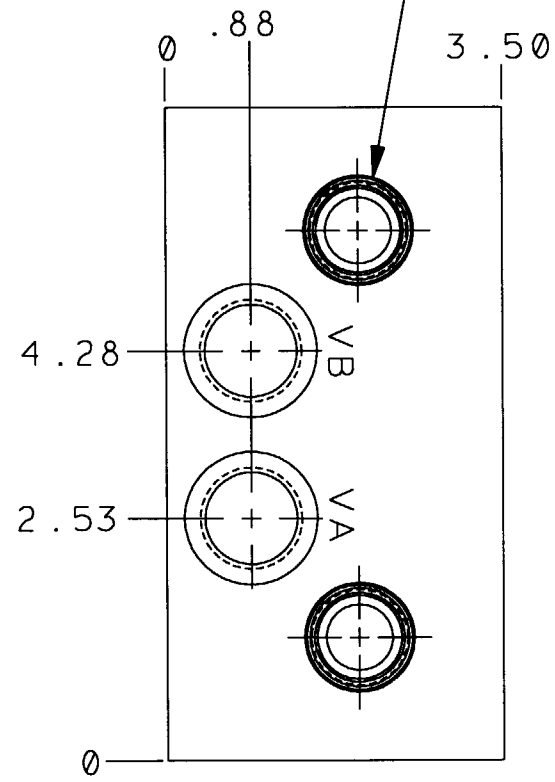



T-2A CAVITY
.719 L.S. DEPTH
TYP (4) PLACES

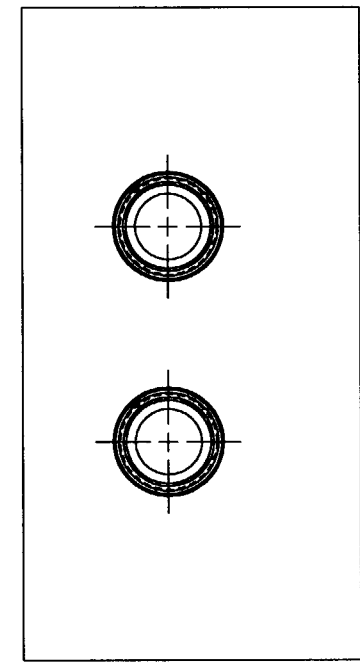

.750-14 BSPP PORT
TYP (8) PLACES

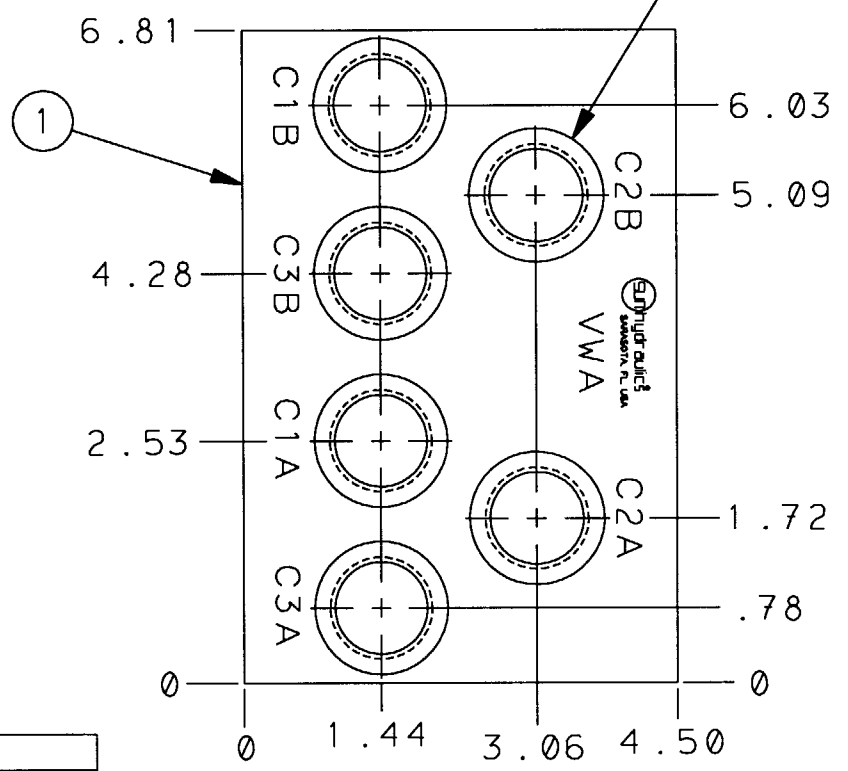



MOUNTING PROVISION:
M10x1.5-6H x .62 DP
TYP (4) PLACES

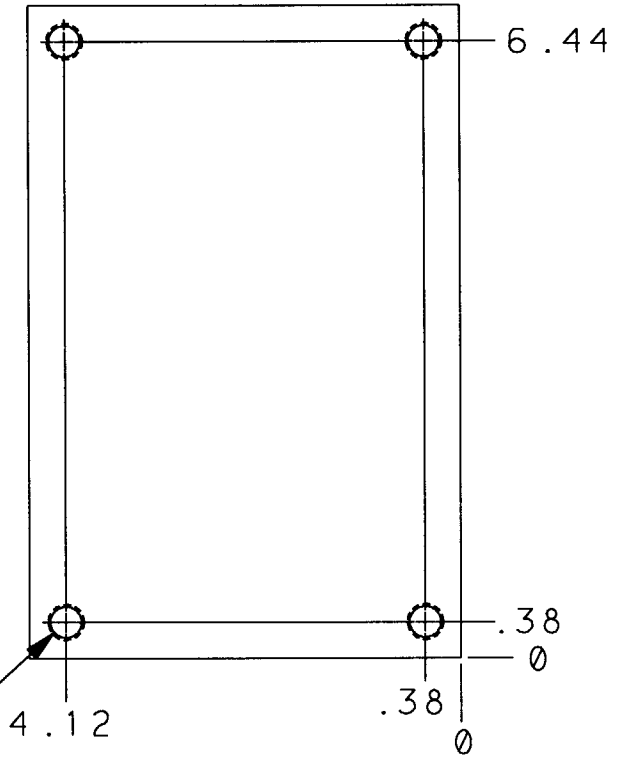

NOTE:

1) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS
SERVICE PRESSURE.

SYMBOL

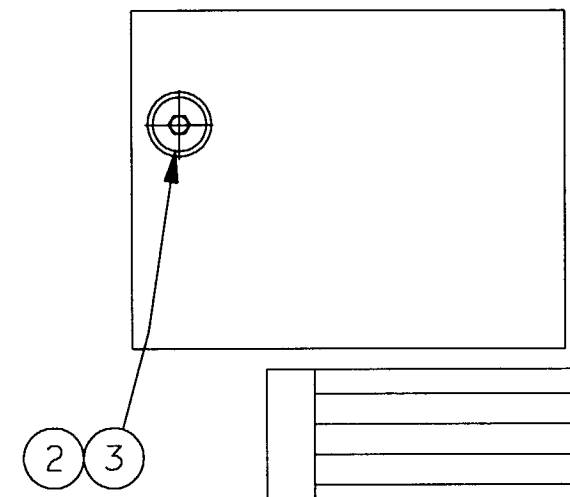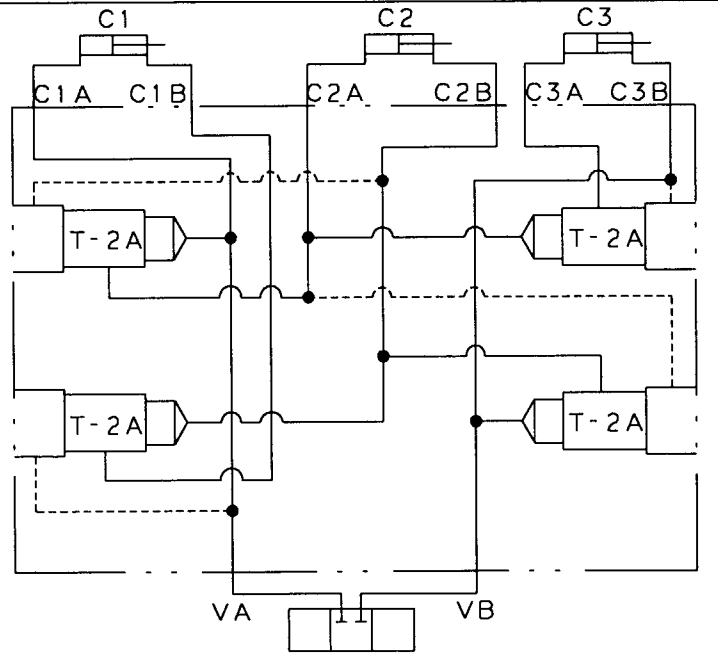

OUTLINE & ASSEMBLY

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED	
DIMENSION	TOL
.x	= ±.030
.xx	= ±.015
.xxx	= ±.005
ANGLE	TOL ± 1/2°
FINISH	80✓
REMOVE ALL BURRS	

TITLE TRIPLE LINE-MOUNTED DIRECT-ACTING SEQUENCE VALVE BODY T-2A CAVITIES		
SCALE	REF.	
1:2		
DRAWN	CHECK	RELEASE
DATE	DATE	DATE
5-4-92		

MATERIAL		HEAT TREAT & FINISH	
ALUMINUM			

3	500-002-904	"O" RING	2
2	330-006-004	HEX SOCKET O-RING BOSS PLUG	2
1	152-855-006	BODY	1
ITEM	PART NO.	PART NAME	QTY

REVISION		PART NO.	
		VWA	

