


SYMBOL

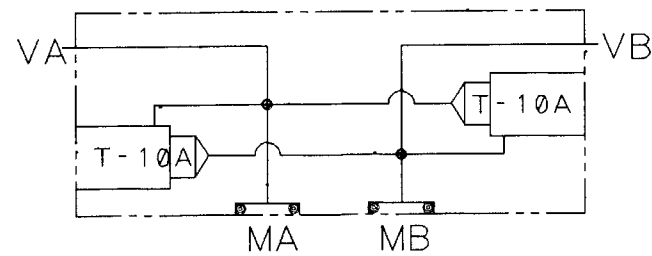


REVISION PART NO. VWB

NOTES:

- 1) SEALS: BUNA-N.
- 2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
- 3) FOR OTHER OPTIONS SEE OPTION SHEET.

.500-14 NPTF PORT
TYP (2) PLACES

T-10A CAVITIES
.12 L.S. DEPTH
TYP. BOTH ENDS

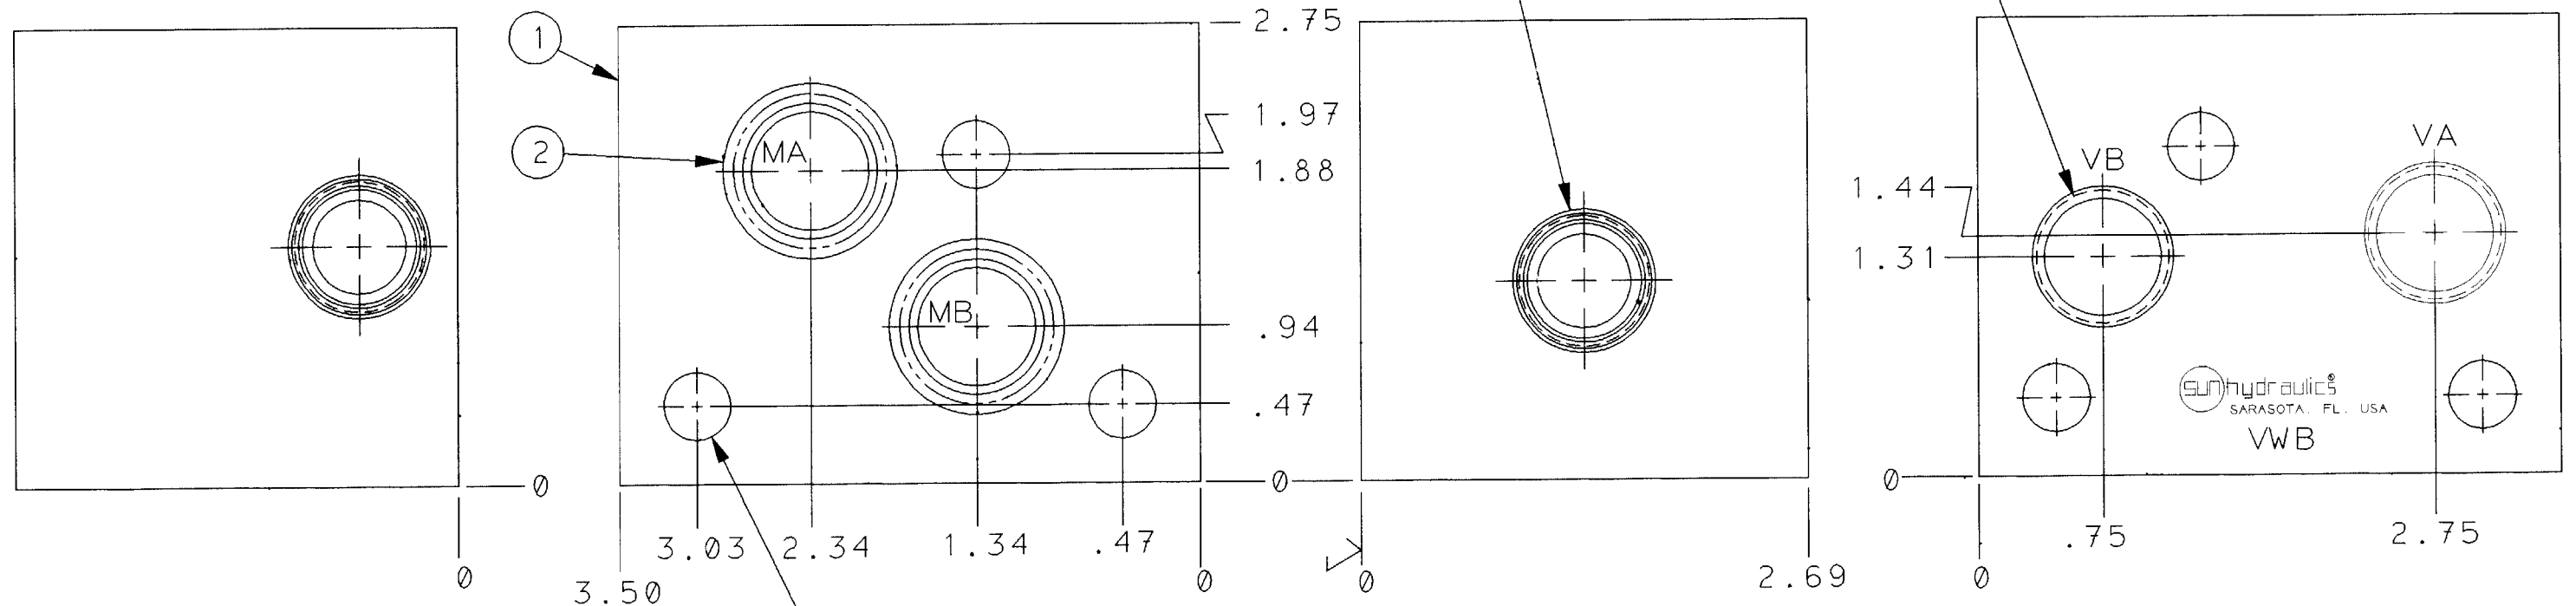

.41 DIA THRU MOUNTING
HOLES TYP (3) PLACES.

2	500-001-117	O RING	2
1	152-840-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEM.

UNLESS OTHERWISE SPECIFIED					TITLE BODY-DIRECT MTD. CROSS PORT RELIEF CHARLYNN 2000 T-10A CAV. .500 NPTF PORTS			REVISION PART NO. VWB	
DIMENSION TOL					SCALE REF. 1 = 1 VZL			MATERIAL	
.x = ±.030					DRAWN DAS			HEAT TREAT & FINISH	
.xx = ±.015					CHECK			DATE 4-1-92	
.xxx = ±.005					RELEASE 3605			DATE 4-5-92	
ANGLE TOL ± 1/2					DATE			DATE	
FINISH 80✓					DATE			DATE	
REMOVE ALL BURRS					DATE			DATE	
LET	REVISION	DATE	DRN	CHK	REL	SUN hydraulics CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983			