

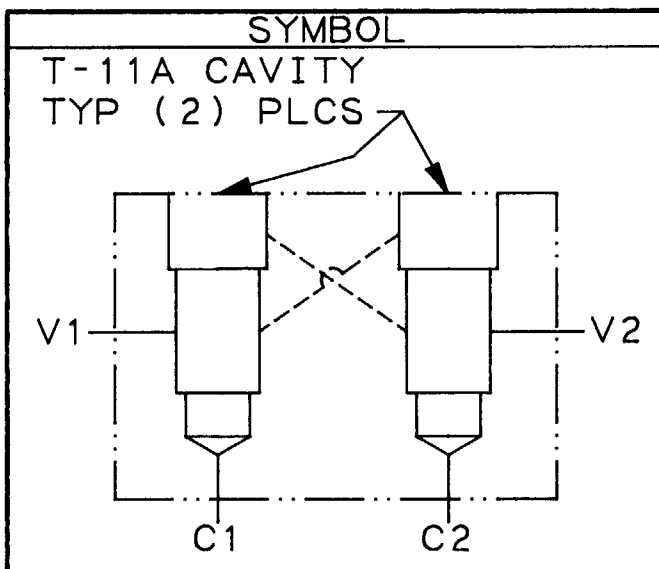


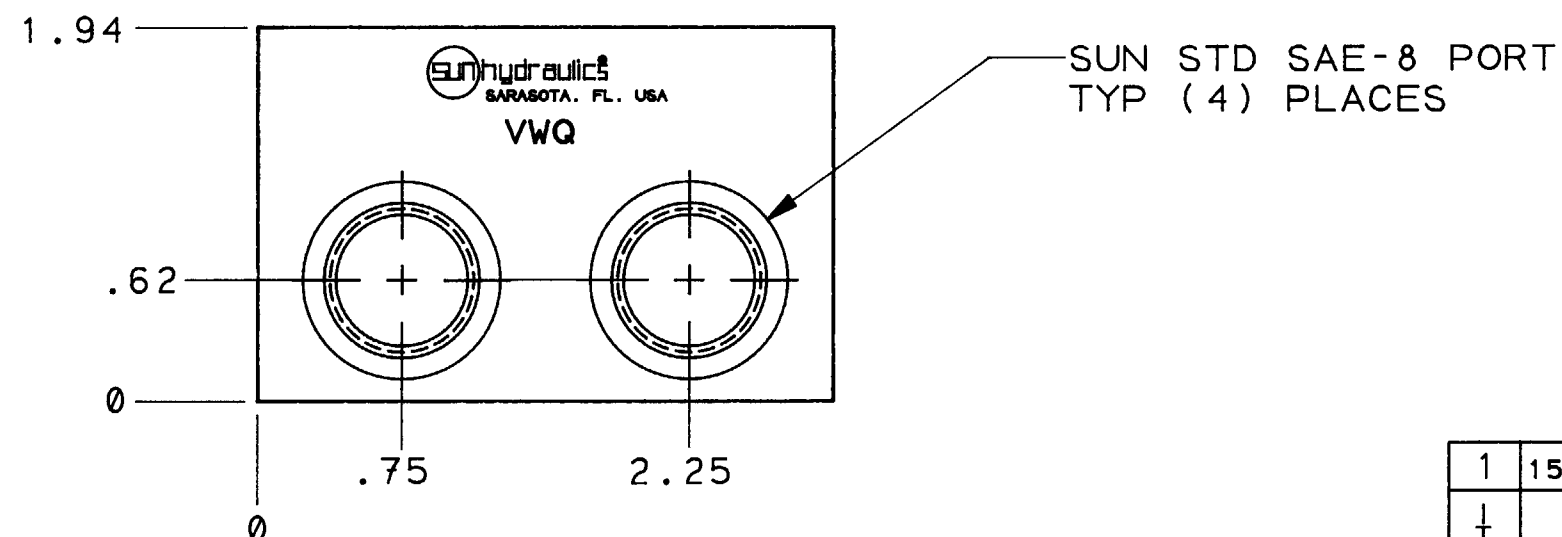

T-11A CAVITY
.688 L.S. DEPTH
TYP (2) PLACES

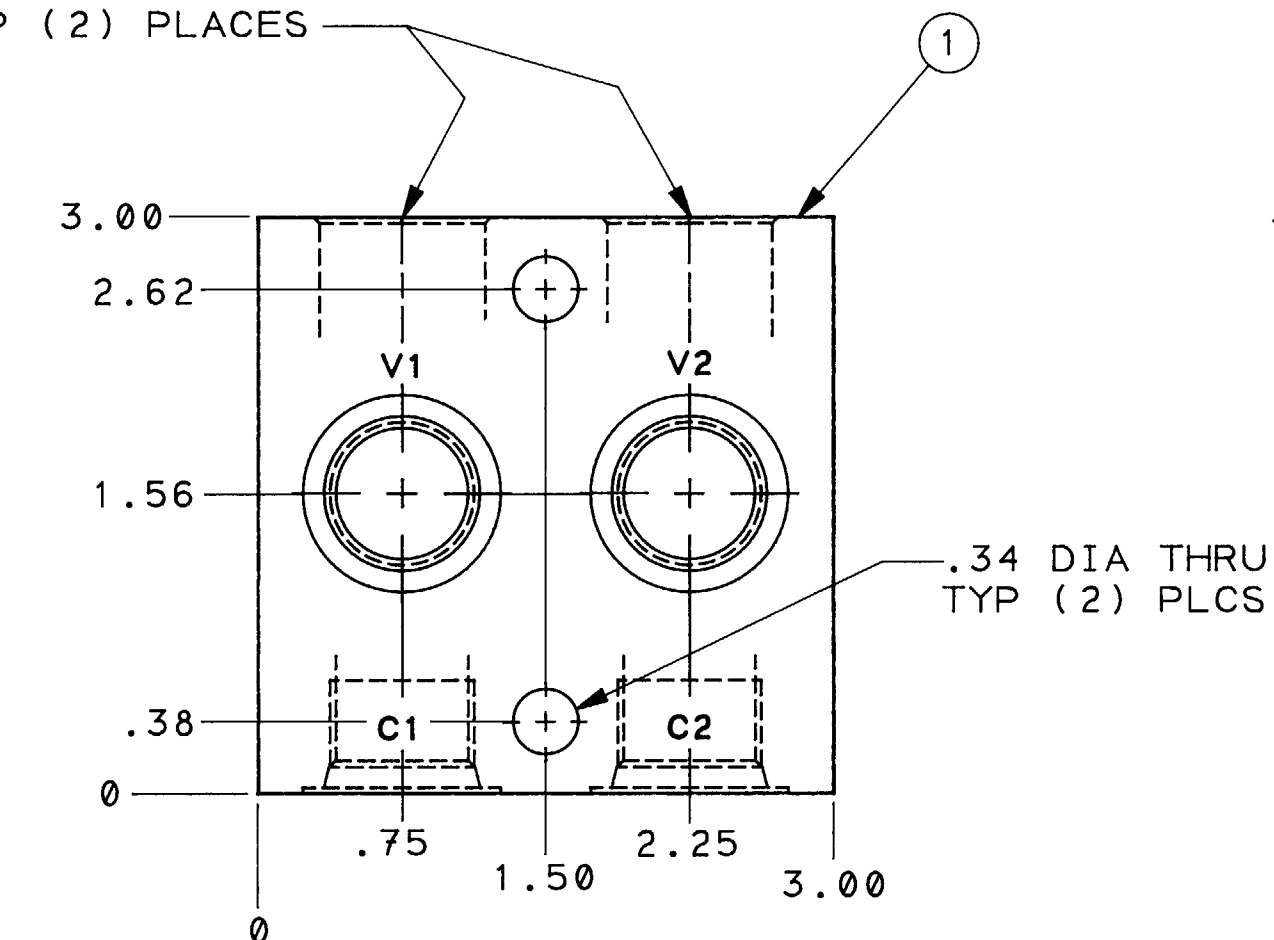

REVISION	PART NO.
	VWQ

FOR OPTIONS, SEE
OPTION SHEET

NOTE:

- 1) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.

								UNLESS OTHERWISE SPECIFIED				TITLE BODY-DUAL T-11A CAV. CROSS-PILOTED				REVISION		PART NO.			
								DIMENSION TOL				SCALE		REF.		MATERIAL					
								.X = ±.030				1:1		YE*		ALUMINUM					
								.XX = ±.015													
								.XXX = ±.005													
								ANGLE TOL ± 1/4													
								FINISH 80✓													
								REMOVE ALL BURRS													
LET				REVISION				DATE				DRN		CHK		REL		 SUN hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983			
												DRAWN		CHECK		RELEASE					
												DAS				3371					
												DATE		DATE		DATE					
												11-1-91				11-8-91					