



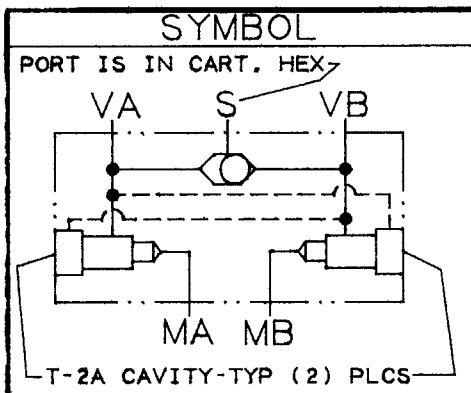


T-2A CAVITY
.719 LS DEPTH
TYP (2) PLCS

SAE-4 PORT "S"
(IN CARTRIDGE
HEX)


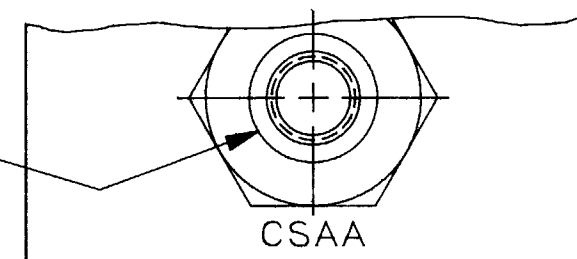


NOTES

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES:
3000 PSI MAXIMUM
CONTINUOUS SERVICE
PRESSURE
- 3) FOR OTHER OPTIONS,
SEE OPTION SHEET

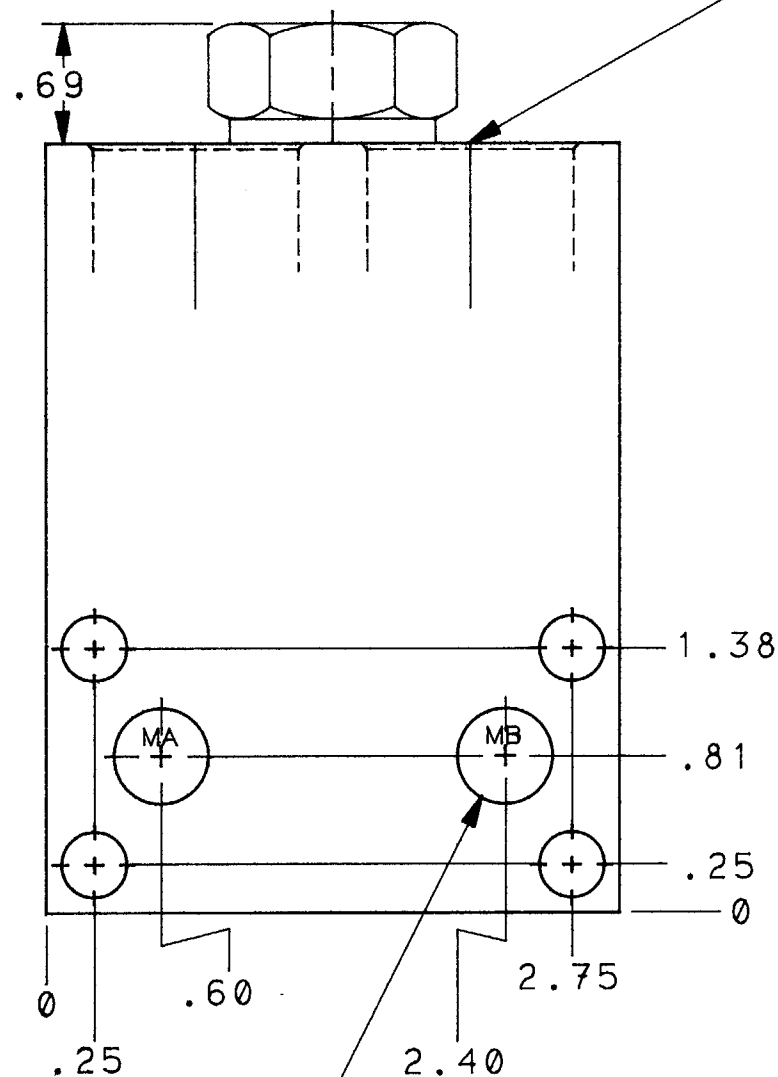

.50 DIA
TYP (2) PLCS

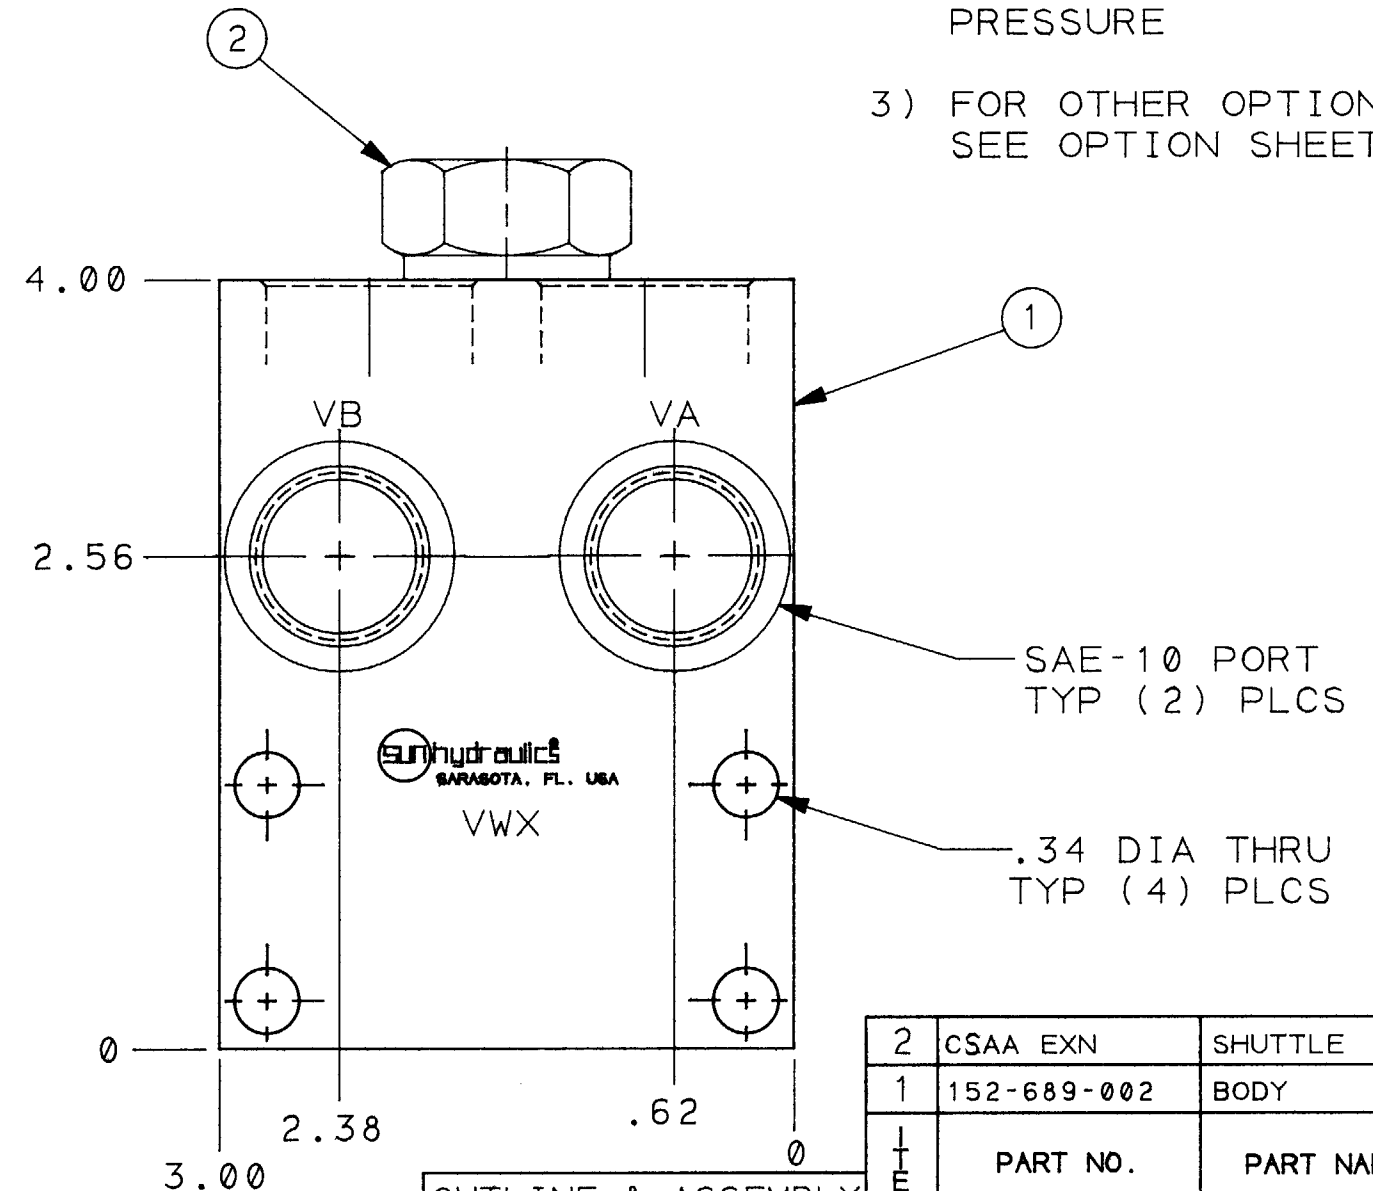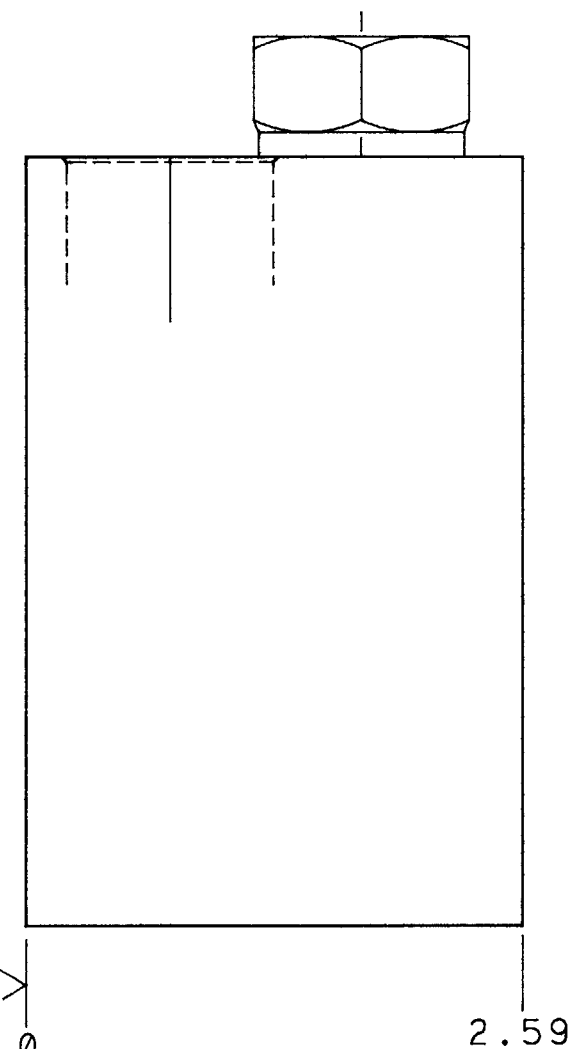

2	CSAA EXN	SHUTTLE	1
1	152-689-002	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED			TITLE BODY-MOTOR MOUNTED DUAL T-2A CAVITIES WITH SHUTTLE		
DIMENSION TOL			SCALE REF.		
.x ±.030			1:1		
.xx ±.015			DRAWN		
.xxx ±.005			CHECK		
ANGLE TOL ±%			RELEASE		
FINISH 80✓			DATE		
REMOVE ALL BURRS			DATE		
			DATE		

REVISION	PART NO.	VWX
MATERIAL 3.00x4.00 6061-T6 ALUM		
HEAT TREAT & FINISH		
SUN hydraulics CORPORATION		
1500 UNIVERSITY PARKWAY		
SARASOTA, FLORIDA 34243, USA		
TELEPHONE (813) 355-2983		