






NOTES:

- 1)SEALS= BUNA N.
- 2)ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
- 3)FOR OTHER OPTIONS SEE OPTION SHEET.

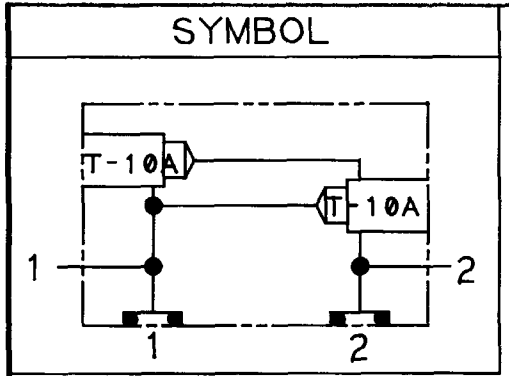

PORTS #1 AND 2
.750-14 BSPP

.41 DIA THRU
CBORED .500 DIA
x .31 DP
TYP (6) PLACES.

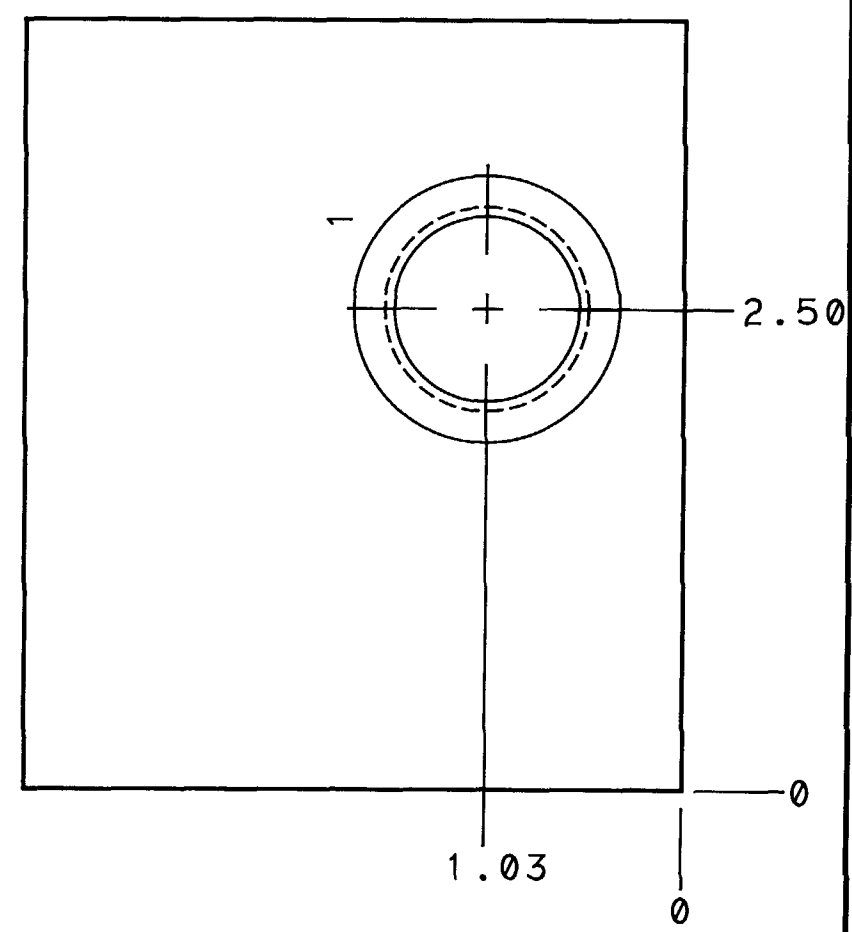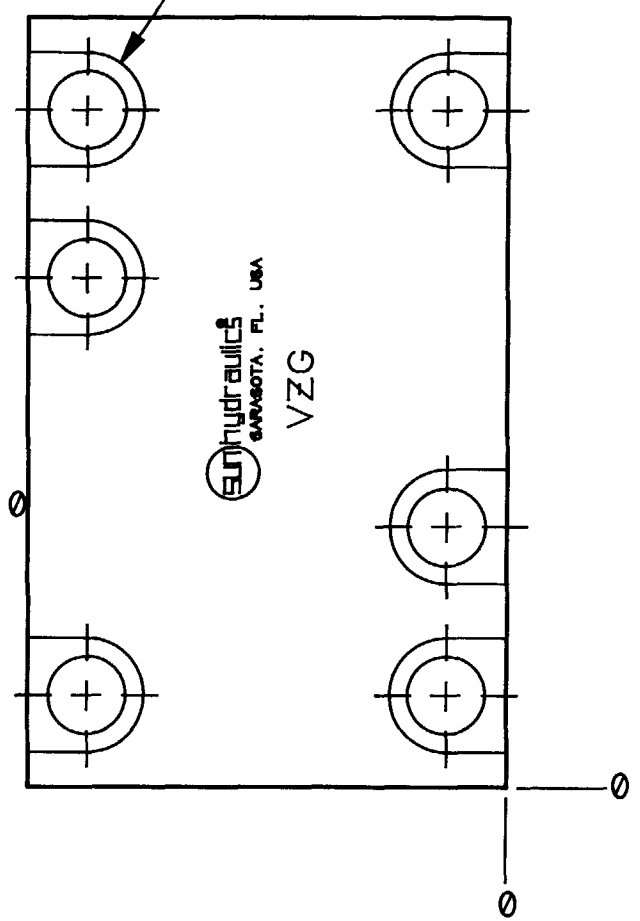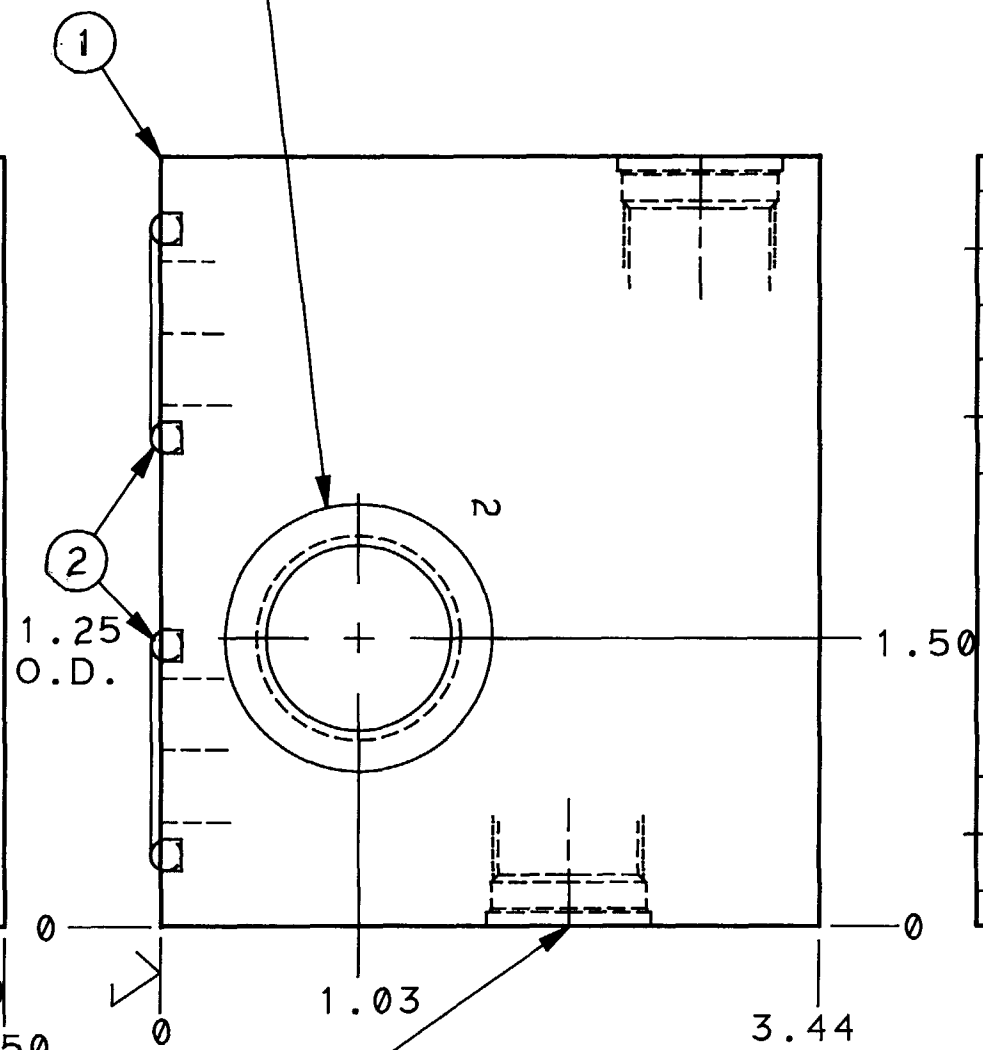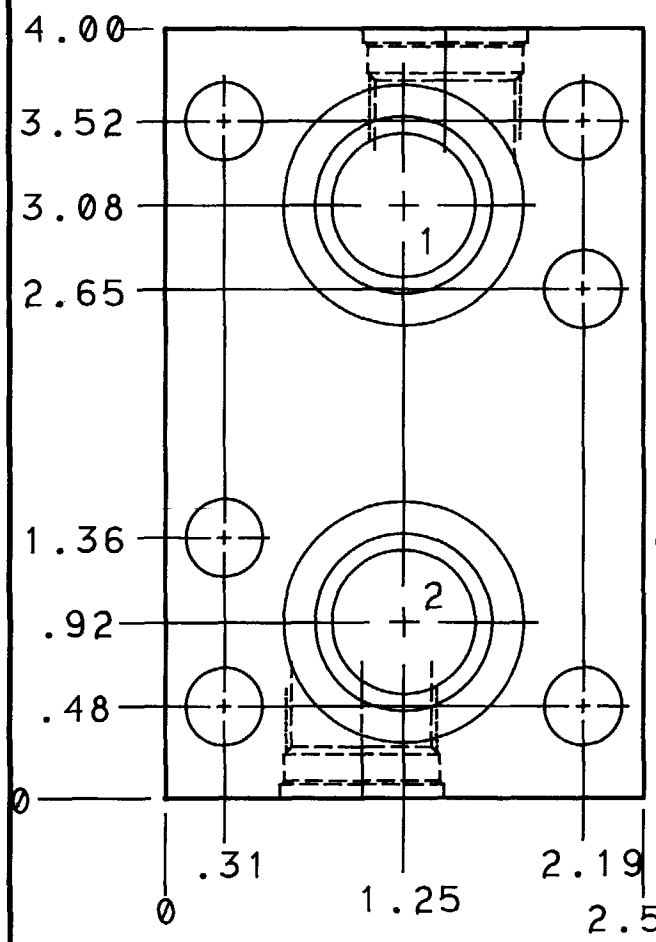

T-10A CAVITY
.07 L.S. DEPTH
TYP BOTH ENDS

2	500-001-214	O RING	2
1	152-568-005	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEM.

UNLESS OTHERWISE SPECIFIED DIMENSION TOL .x = ±.030 .xx = ±.015 .xxx = ±.005 ANGLE TOL ±% FINISH 80✓ REMOVE ALL BURRS					TITLE BODY-CROSS PORT RELIEF CHARLYN 4000/6000 T-10A CAVITIES .75 BSPP PORTS			REVISION PART NO. VZG	
					SCALE REF. 1 = 1		MATERIAL ALUMINUM		
					DRAWN R/B	CHECK DAZ	RELEASE 2870	HEAT TREAT & FINISH	
					DATE 1-8-91	DATE 1-9-91	DATE 1-10-91		
LET	REVISION	DATE	DRN	CHK	REL	SUN hydraulics CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, US TELEPHONE (813) 355-2983			