


REFER TO SUN HYDRAULICS' TECHNICAL LITERATURE & CATALOGUE FOR DETAILS OF CARTRIDGE STANDARD SETTINGS, ADJUSTMENT RANGES, MAXIMUM PRESSURE RATINGS, SEAL MATERIAL, TORQUE VALUES, ETC.

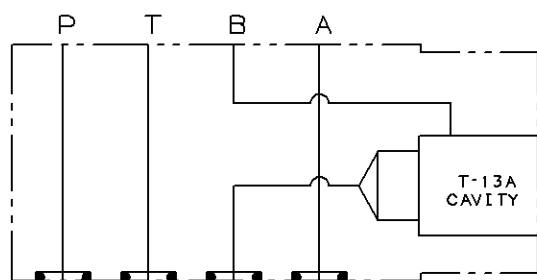

B	ADDED CAV DIMS. ADDED A P B STAMPING	29 JAN 02	GH	
A	INTERFACE FOOTPRINT MOVED (1.12 WAS 1.17) MTG HOLES WERE .22 (5,6) DIA COSMETIC CHANGES TO DRWG APPEARANCE	28 NOV 01	GH	
LTR	REVISION	DATE	DRN	CHK

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL .X = +/- .030 .XX = +/- .015 .XXX = +/- .005 ANGLE TOL +/- 1° FINISH ✓ 80 REMOVE ALL BURRS

SCALE	REF
1 : 1	
DRAWN	
M. SAGE	
DATE	
04 JUL 00	

REF	
E	CHECK D.COMPTON
00	DATE 19 JUL 00

RELEASE
DATE

	MATERIAL
	ALUMINUM
E	HEAT TREATMENT
	

MINIUM
EAT & FINISH

SUN **hydraulics** ^(R)
LIMITED
WHEELER ROAD, WHITLEY,
COVENTRY, CV3 4LA ENGLAND.
TELEPHONE (01203) 307696