
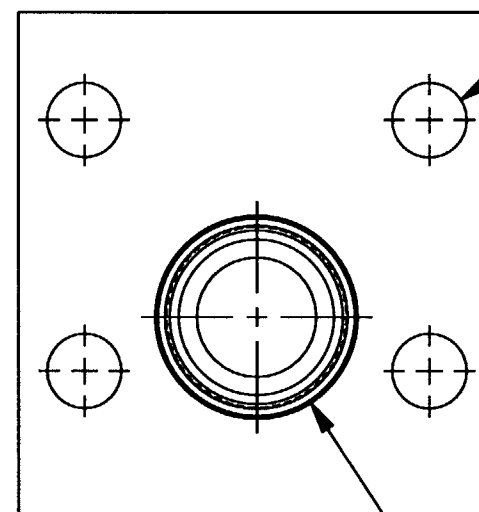




NOTES:

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS
SERVICE PRESSURE

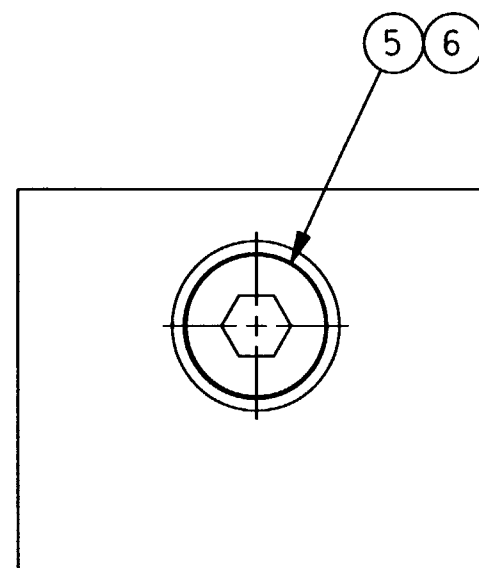

T-19A CAVITY
1.156 L.S. DEPTH

.78 DIA THRU
TYP (4) PLACES

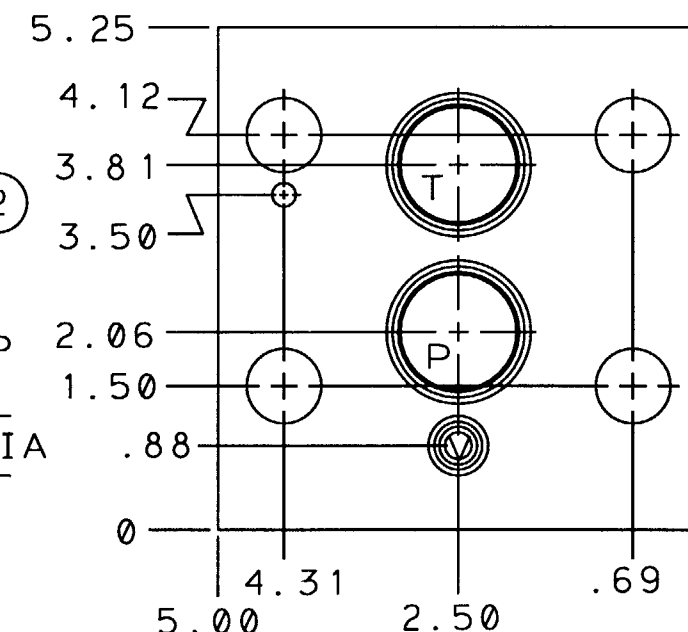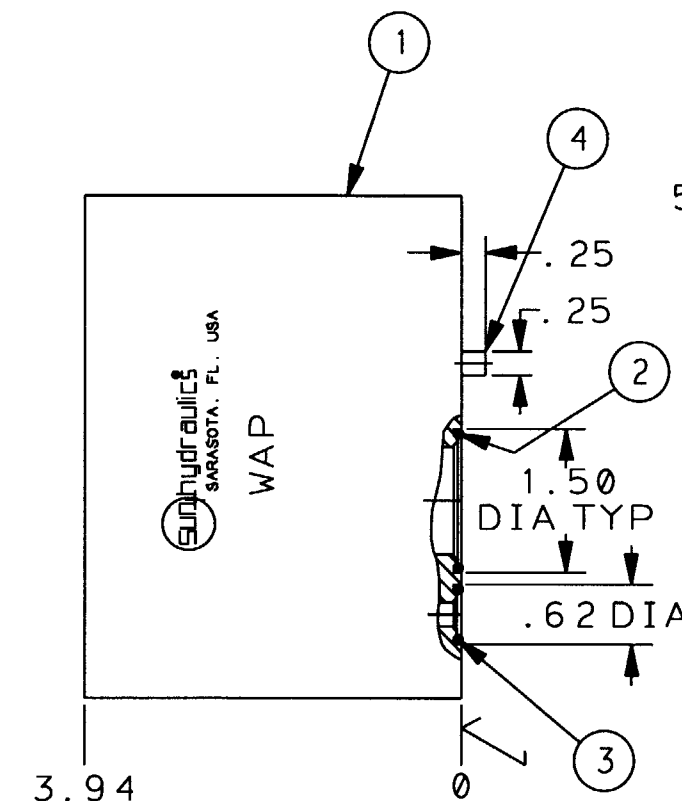


6	500-002-916	"O" RING	1
5	330-006-016	HEX SOCKET O-RING BOSS PLUG	1
4	811-001-002	PIN	1
3	500-001-111	"O" RING	1
2	500-001-125	"O" RING	2
1	152-897	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY

TITLE SUBPLATE-MOUNTED
T-19A CAVITY

REVISION PART NO.
WAP

SCALE	REF.	MATERIAL
1/2		ALUMINUM
DRAWN	CHECK	RELEASE
DAS		3873
DATE	DATE	DATE
8-6-92		8-6-92

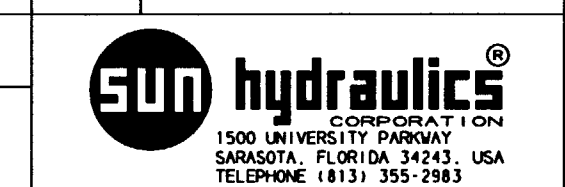

UNLESS
OTHERWISE
SPECIFIED
DIMENSION TOL
.x ±.030
.xx ±.015
.xxx ±.005
ANGLE TOL ± 1/4
FINISH 80V
REMOVE ALL
BURRS

LET	REVISION	DATE	DRN	CHK	REL

SYMBOL

