




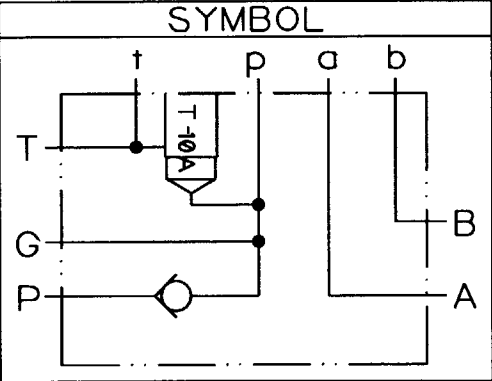

T-10A CAVITY
.031 L.S.DEPTH

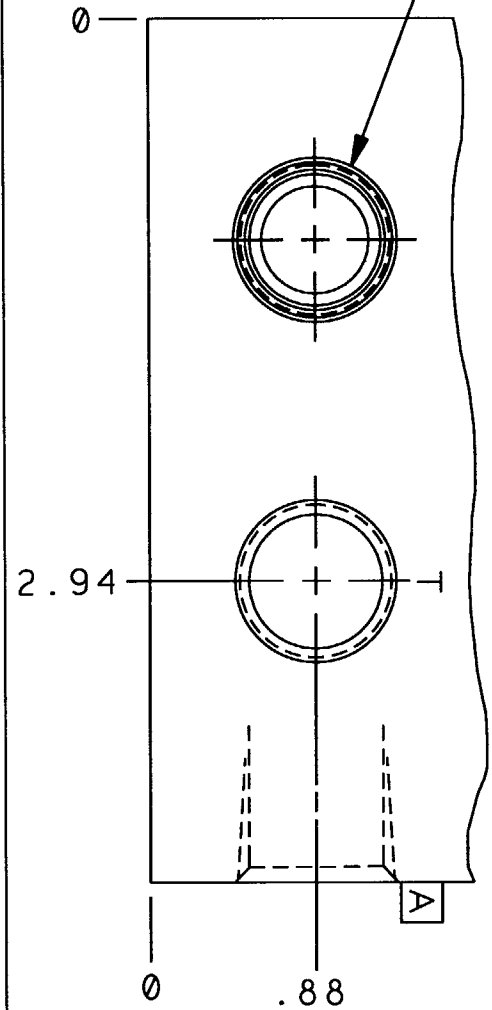

ISO 05 PATTERN
.250-20UNC x .50 DP
TYP (4) PLACES

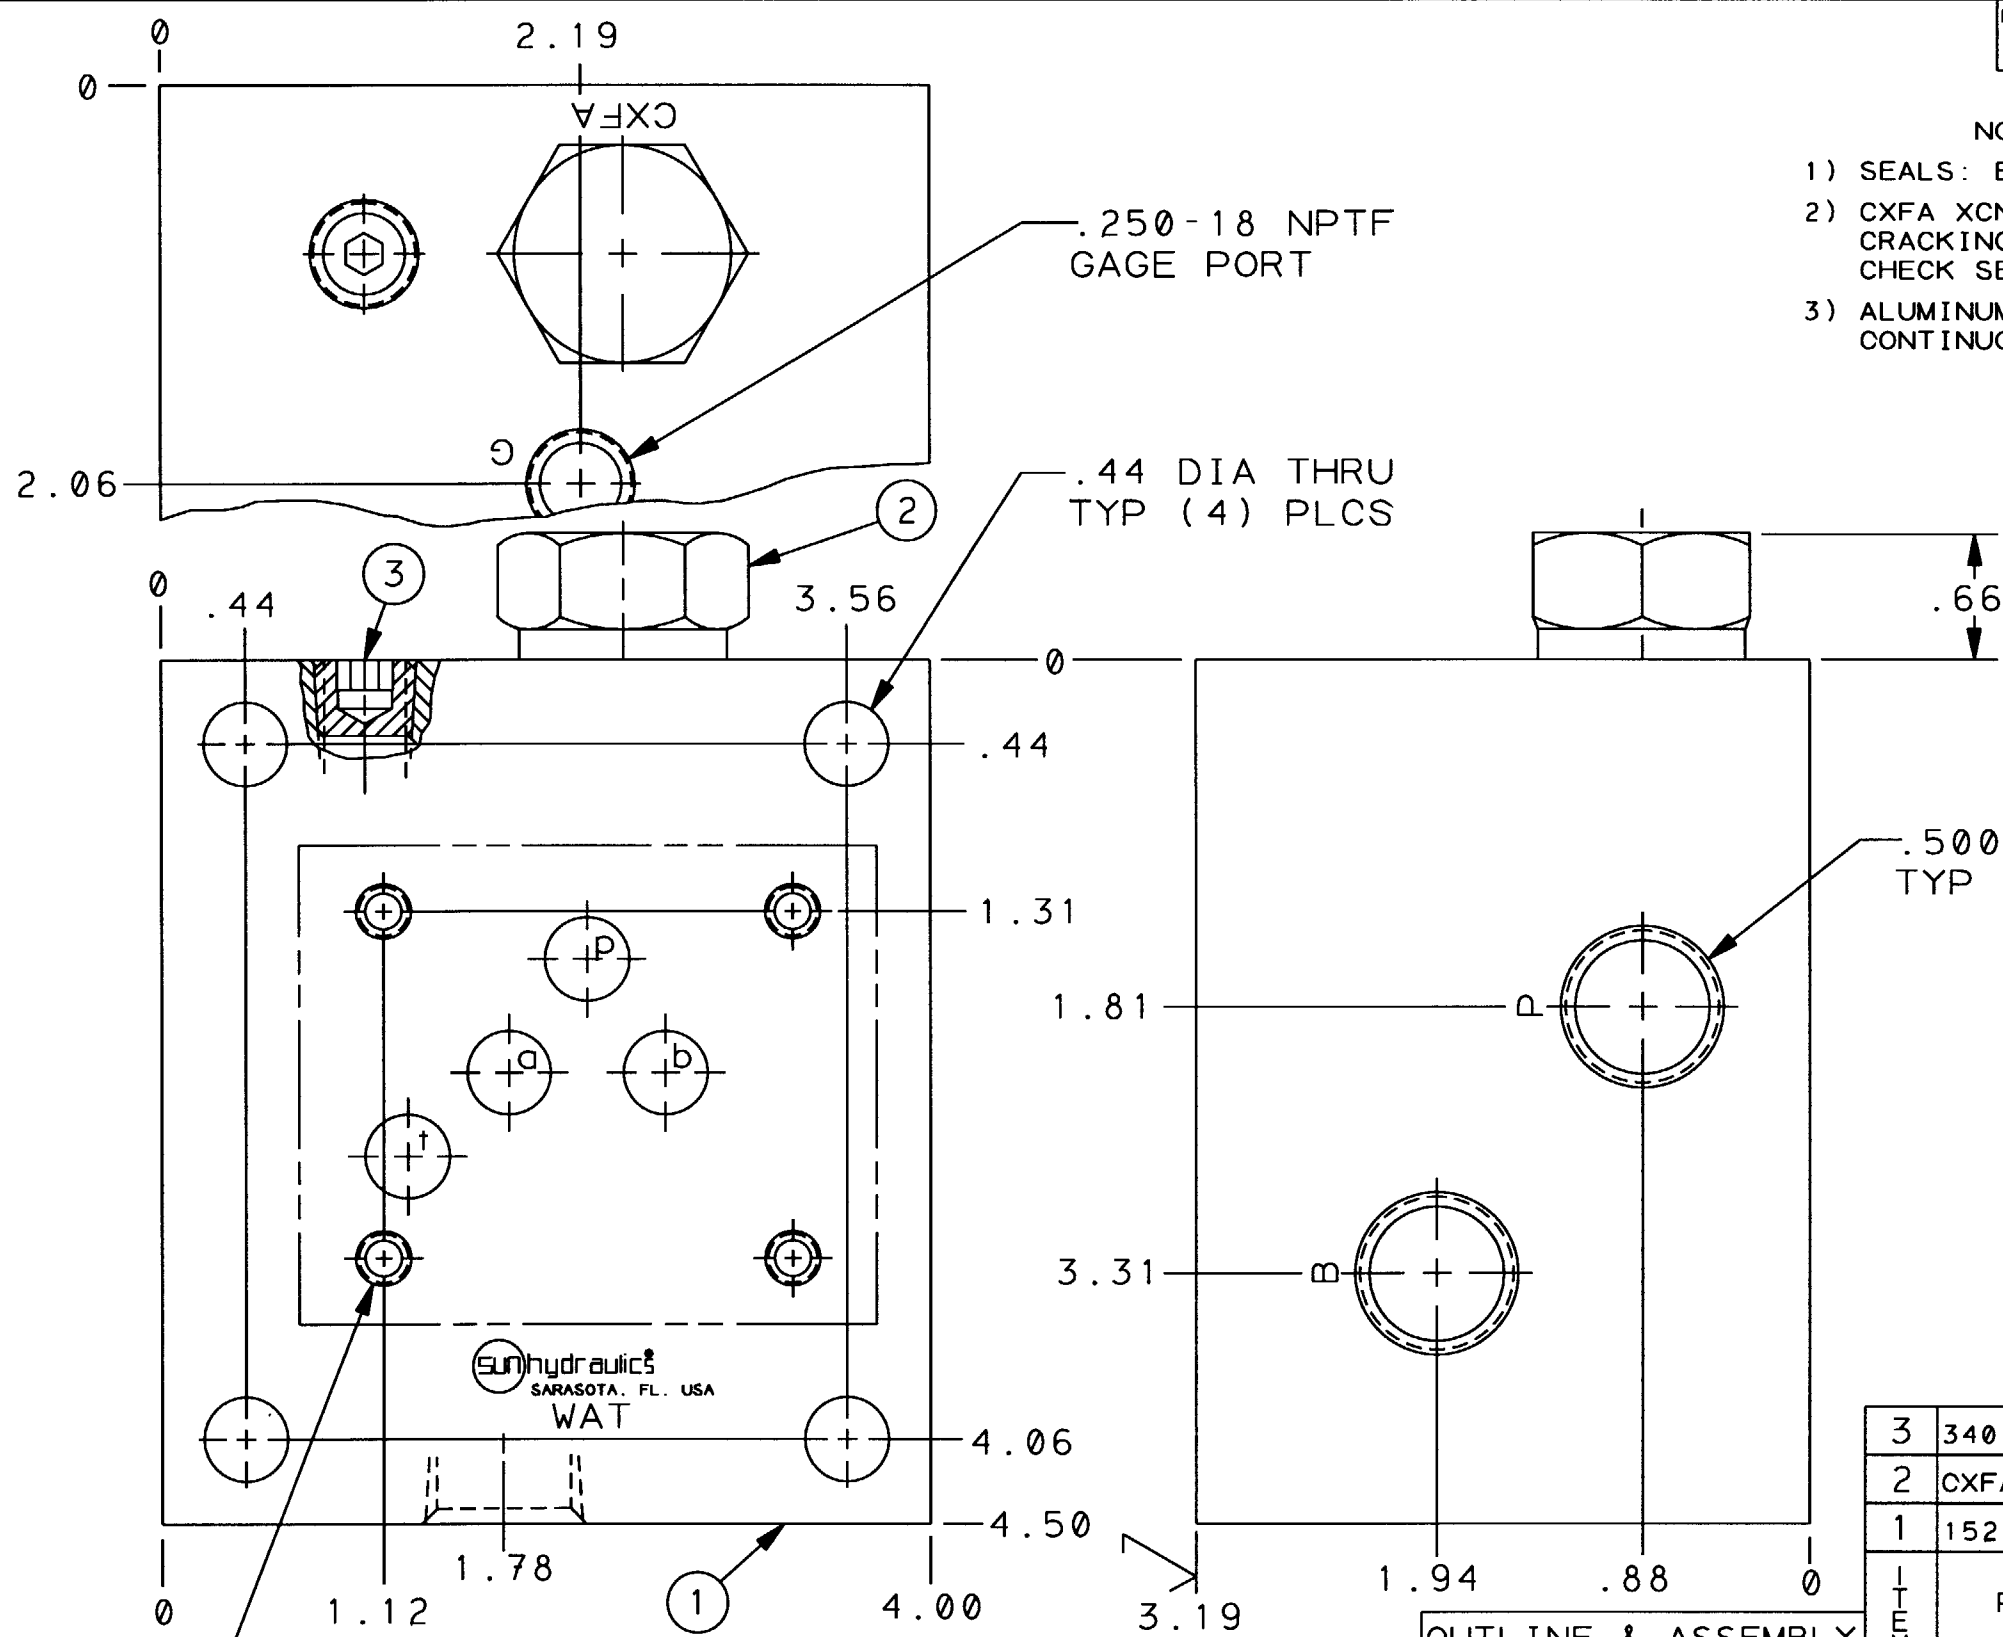

- NOTES:
- 1) SEALS: BUNA-N
 - 2) CXFA XCN CARTRIDGE:
CRACKING PRESS.: 30 +/- 3 PSI
CHECK SEAT: STEEL
 - 3) ALUMINUM BODIES: 3000 PSI MAX
CONTINUOUS SERVICE PRESSURE.

3	340-003	PIPE PLUG	1
2	CXFA XCN	CHECK VALVE	1
1	152-887-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED				TITLE ISO 05 SUBPLATE-RELIEF & CHECK CIRCUIT				REVISION		PART NO. WAT	
DIMENSION TOL				SCALE REF.				MATERIAL			
.x ±.030				1:1				ALUM. & STEEL			
.xx ±.015				DRAWN DAS				HEAT TREAT & FINISH			
.xxx ±.005				CHECK				RELEASE 3850			
ANGLE TOL ± 1/2				DATE 7-17-92				DATE 7-17-92			
FINISH 80V				DATE				DATE			
REMOVE ALL BURRS				DATE				DATE			
LET	REVISION	DATE	DRN	CHK	REL	SUNhydraulics CORPORATION				1500 UNIVERSITY PARKWAY	
						SARASOTA, FLORIDA 34243, USA				TELEPHONE (813) 355-2983	