




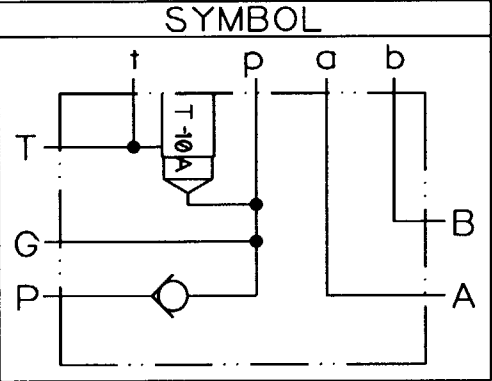

T-10A CAVITY
.031 L.S. DEPTH

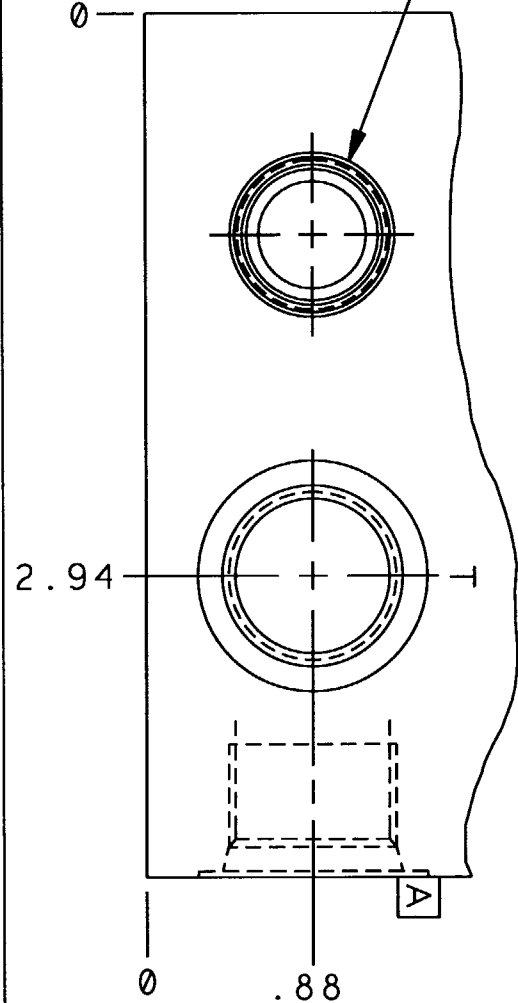

ISO 05 PATTERN
.250-20UNC x .50 DP
TYP (4) PLACES

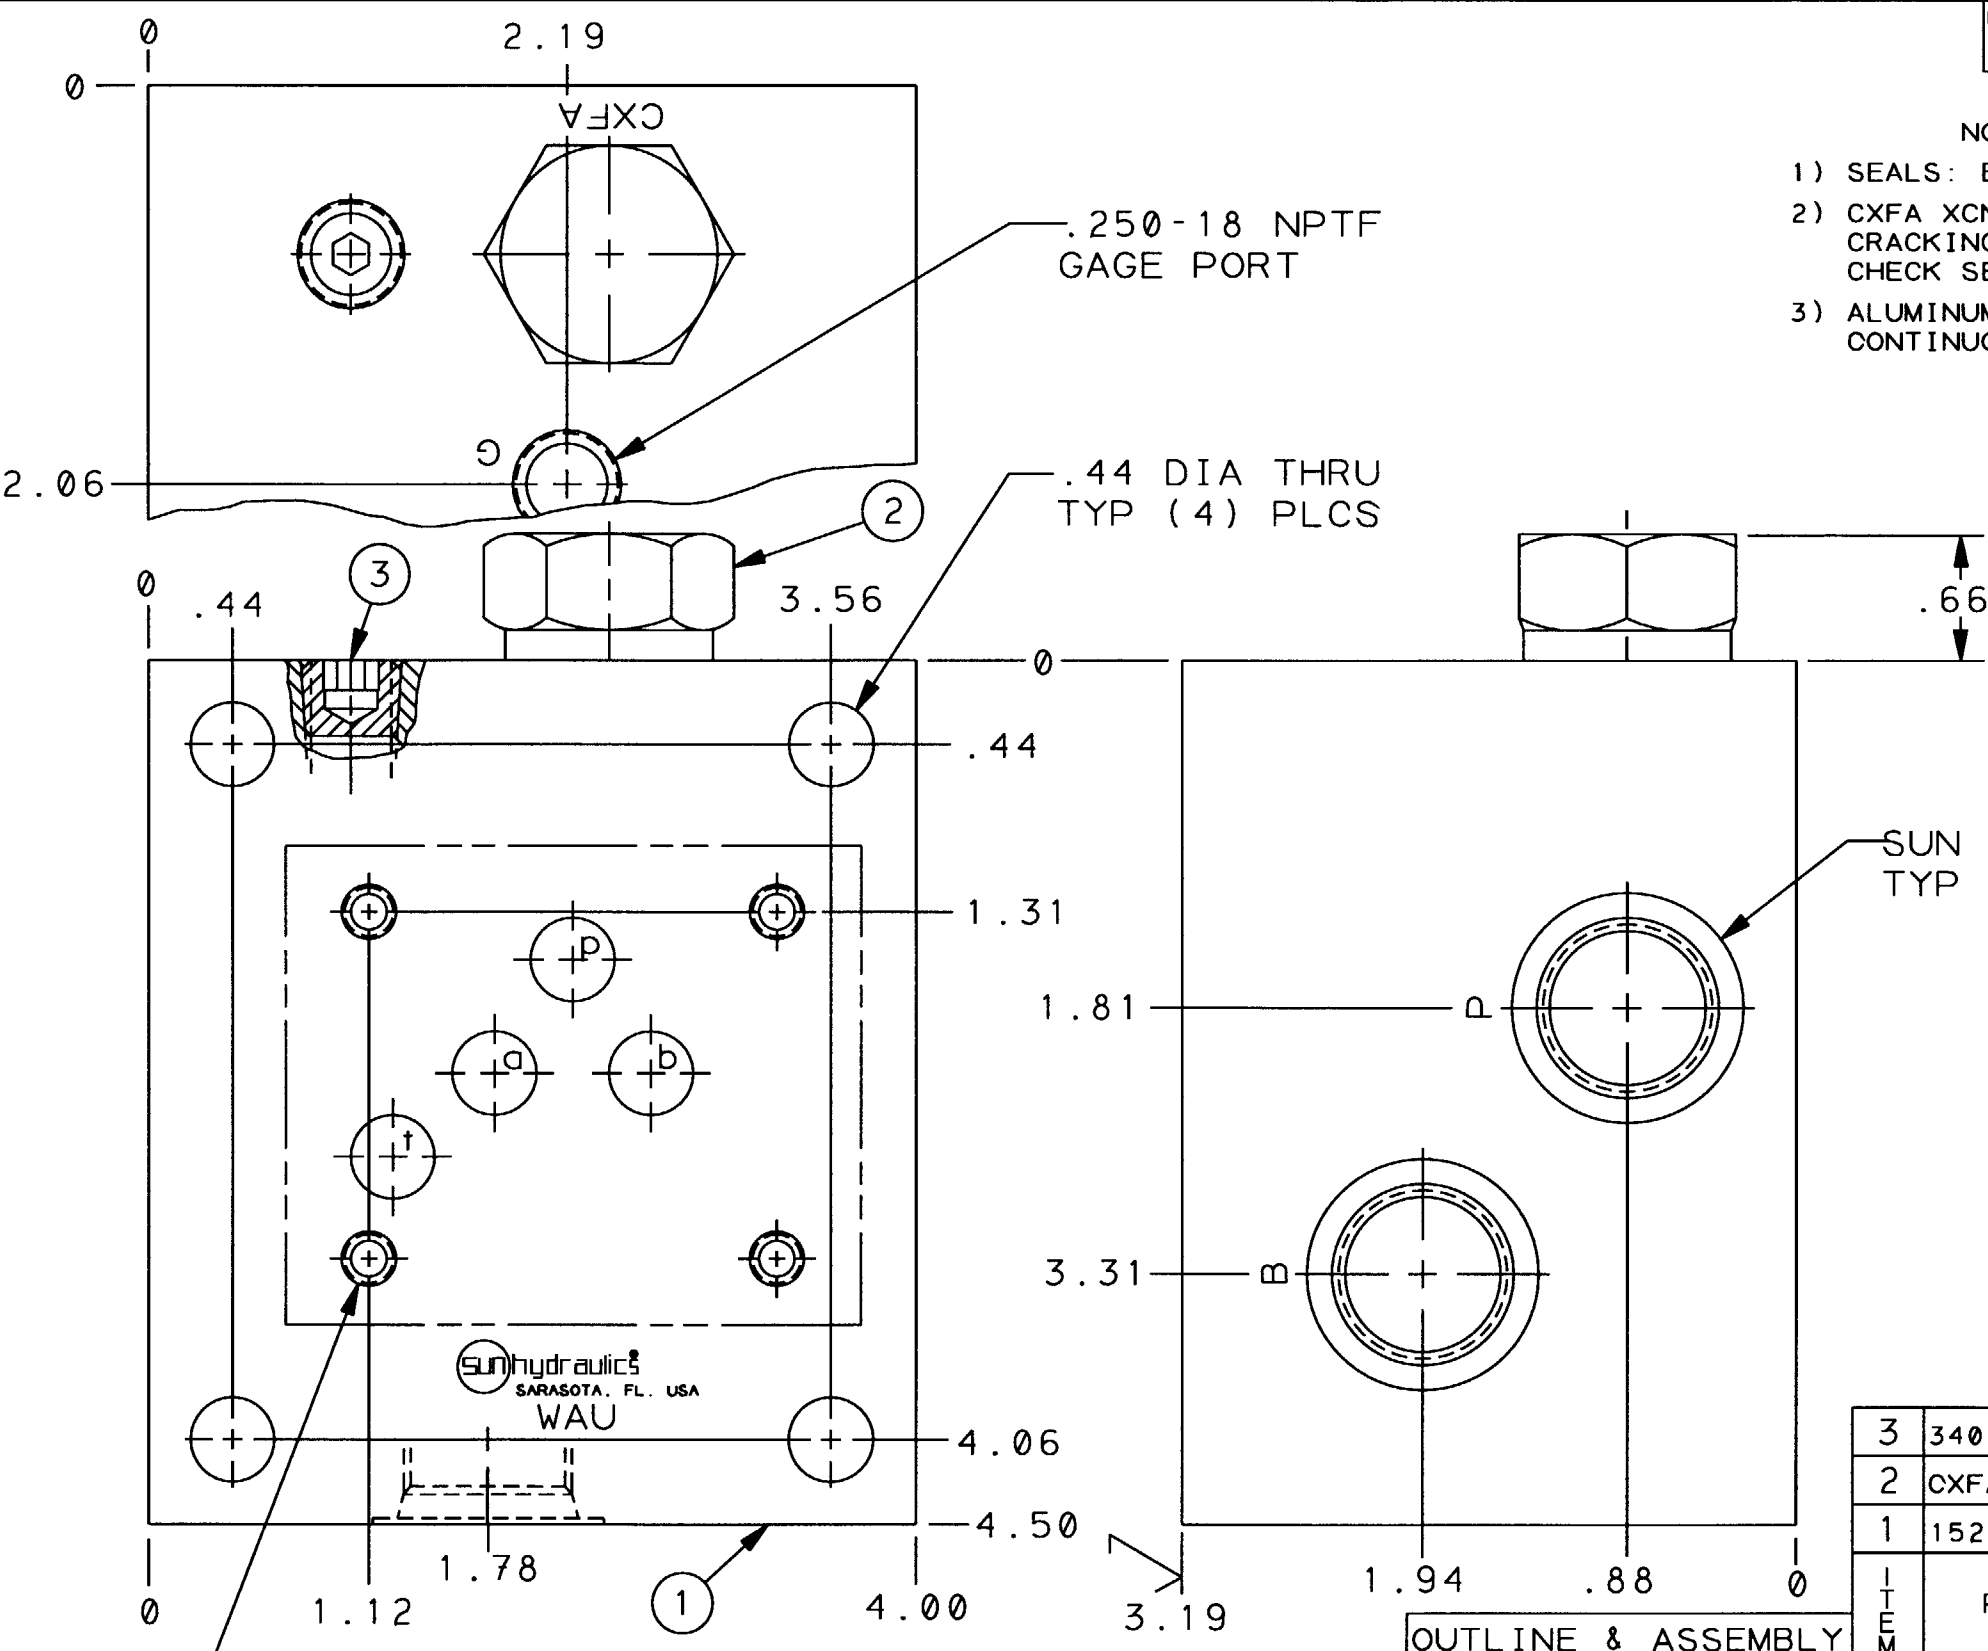

- NOTES:
- 1) SEALS: BUNA-N
 - 2) CXFA XCN CARTRIDGE:
CRACKING PRESS.: 30 +/- 3 PSI
CHECK SEAT: STEEL
 - 3) ALUMINUM BODIES: 3000 PSI MAX
CONTINUOUS SERVICE PRESSURE.

3	340-003	PIPE PLUG	1
2	CXFA XCN	CHECK VALVE	1
1	152-887-002	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED		TITLE ISO 05 SUBPLATE-RELIEF & CHECK CIRCUIT		REVISION		PART NO. WAU	
DIMENSION TOL		SCALE REF.		MATERIAL		HEAT TREAT & FINISH	
.x = ±.030		1:1		ALUM. & STEEL			
.xx = ±.015		DRAWN DAS		CHECK		RELEASE 3850	
.xxx = ±.005		DATE 7-17-92		DATE		DATE 7-17-92	
ANGLE TOL ± 1/2							
FINISH 80							
REMOVE ALL BURRS							
LET	REVISION	DATE	DRN	CHK	REL		

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983